



KT-LALED-XA-RM-KIT

RECESSED MOUNT KIT

DESCRIPTION

Recessed mount kit for Keystone Linta Series Architectural Pendant Fixtures

APPLICATION

Fits all corresponding KT-LALED fixtures for recess mount applications in Drywall Ceilings.

PRODUCT FEATURES


Includes recessed mount frame, spring clips, spring clip brackets, safety cables, and mounting hardware



PRODUCT SPECIFICATIONS

CATALOG NUMBER	DESCRIPTION
KT-LALED-2A-RM-KIT	Recessed Mounting Kit for 2' Fixtures in Drywall Ceilings
KT-LALED-3A-RM-KIT	Recessed Mounting Kit for 3' Fixtures in Drywall Ceilings
KT-LALED-4A-RM-KIT	Recessed Mounting Kit for 4' Fixtures in Drywall Ceilings
KT-LALED-8A-RM-KIT	Recessed Mounting Kit for 8' Fixtures in Drywall Ceilings

PHYSICAL SPECIFICATIONS

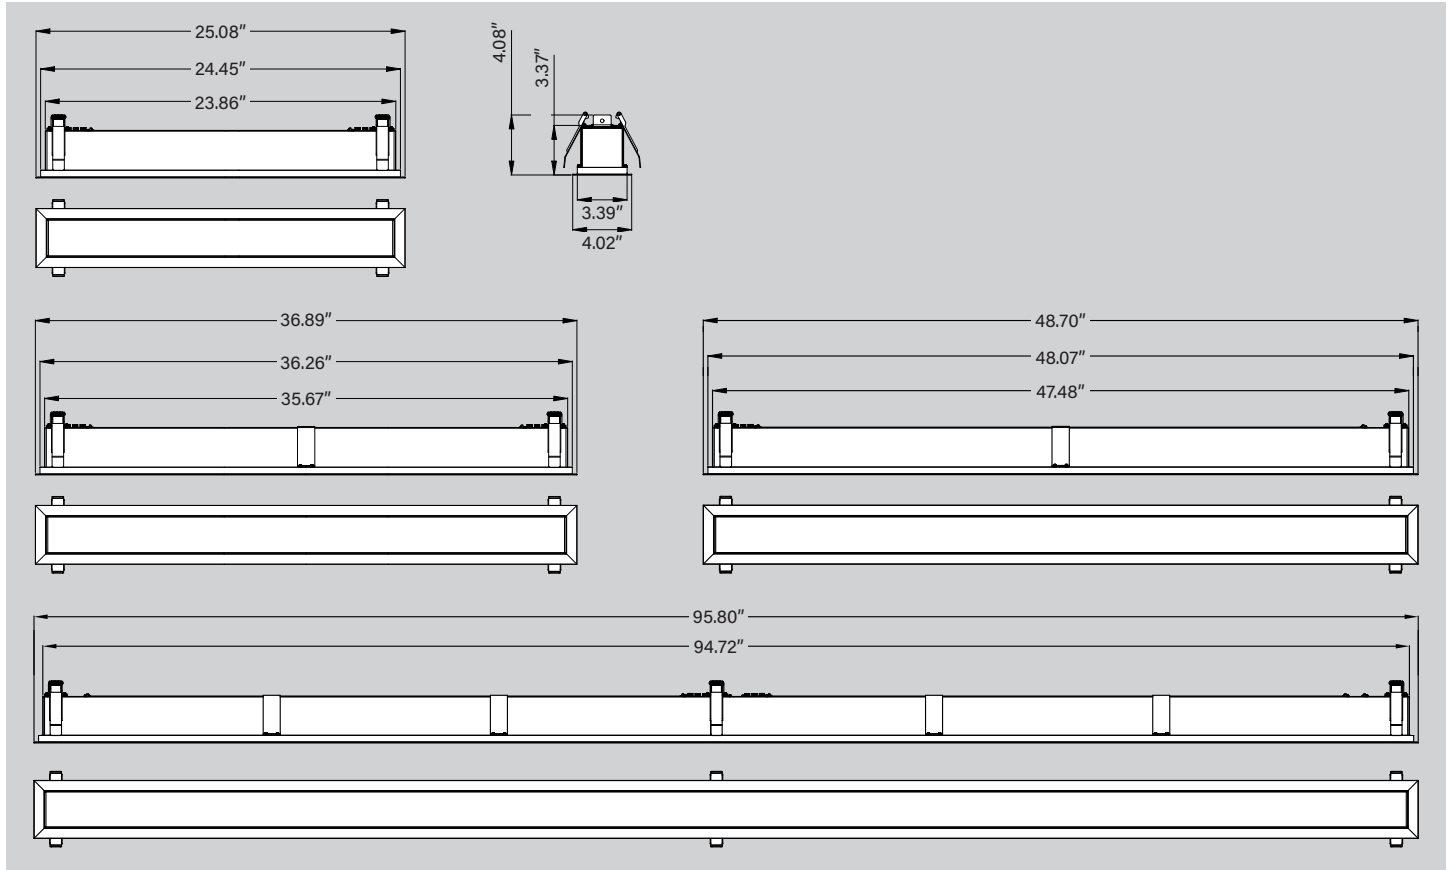


KT-LALED-XA-RM-KIT


RECESSED MOUNT KIT

INSTALLATION INSTRUCTIONS

1. Insert the linear fixture into the recessed frame. Use the Spring clip fixed brackets to fasten the spring clips on both ends of the fixture.

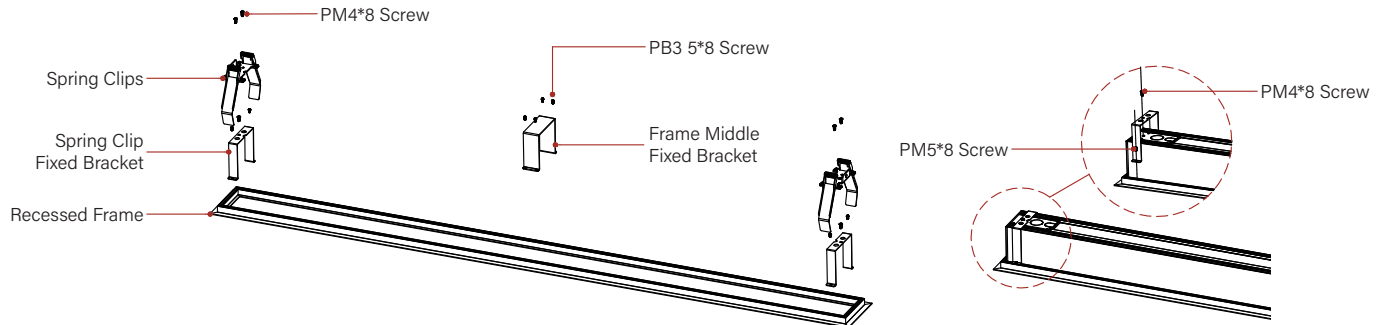


2. Determine Location to install the recessed mount Kit. Ensure suitable length of incoming supply power cable is present. Ensure power is turned off. Cut Hole in the ceiling according to the size of the fixture as indicated in the following chart.

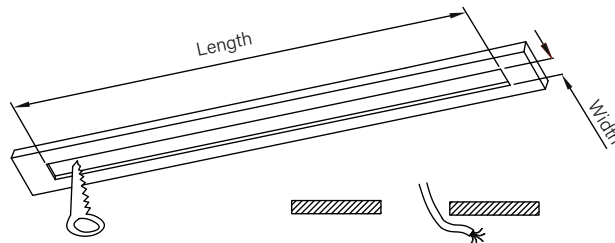


RECOMMENDED HOLE SIZE		
Product Model	Length (in)	Width (in)
2FT	24.72	3.62
3FT	36.54	3.62
4FT	48.35	3.62
8FT	95.60	3.62

3. Complete all input wire and dimming connections as needed. Connections should be made inside the fixture wiring compartment. (No wiring harness included for surface mount installations.) Adjust Wattage, CCT, and directional switches as needed. (100% downlight recommended for recessed mount installation.)

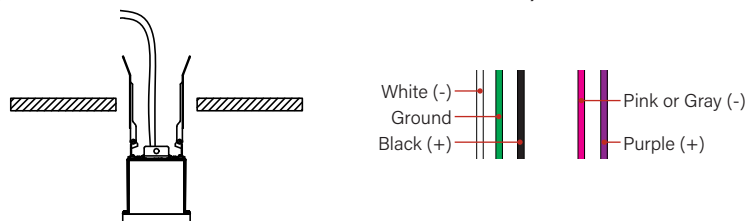

4. Install the middle fixed bracket onto the recessed frame once fixture wiring is complete and the top of fixture is closed. (Not needed for 2ft recessed mount kit.)

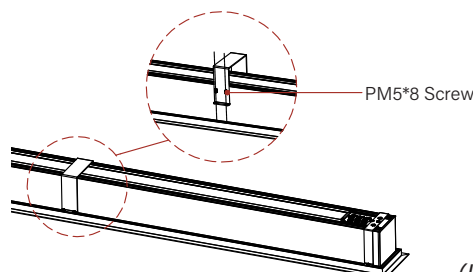

(Installation Instructions continued on next page)




KT-LALED-XA-RM-KIT

RECESSED MOUNT KIT

INSTALLATION INSTRUCTIONS (continued)

5. If applicable, attached included safety rope to the spring clips and suitable ceiling infrastructure as needed in accordance with local building code requirements. Bend the spring assemblies up on both sides and insert the fixture upwards into the ceiling. (Be careful not to pinch fingers upon release.) Restore Power to Fixture

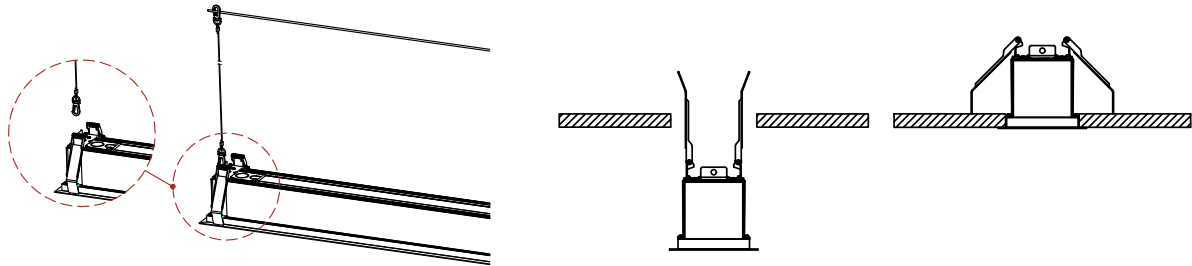

ORDERING INFORMATION

CATALOG NUMBER	UPC	EASY CODE
KT-LALED-2A-RM-KIT	843654158495	NVI-25
KT-LALED-3A-RM-KIT	843654158501	SYQ-66
KT-LALED-4A-RM-KIT	843654156835	ZXE-03
KT-LALED-8A-RM-KIT	843654156842	GSI-69

CATALOG NUMBER BREAKDOWN

KT-LALED-XA-RM-KIT

1	2	3	4	5	6	7
---	---	---	---	---	---	---

- 1 Keystone Technologies
2 Linear Architectural Fixture
3 LED
4 Nominal Size

- 5 Series/Form Factor
6 Recessed Mount
7 Kit

4 Nominal Size	
2	2FT
3	3FT
4	4FT
8	8FT