



KTSL-WS1-UV-SG


BLUETOOTH MESH WIRELESS WALL SWITCH

DESCRIPTION

Bluetooth mesh wireless wall switch for Smartloop System. Single gang wall box size. 120-277V.

APPLICATION

Ideal for small- to medium-size systems, such as schools, offices, auditoriums, and warehouses

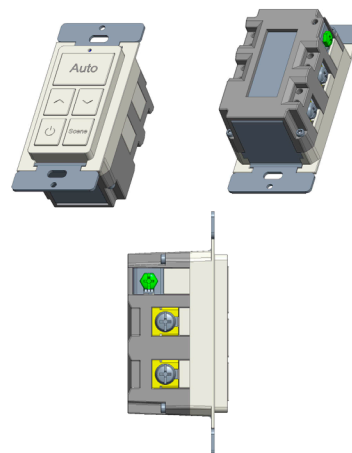

5 YEAR WARRANTY

PRODUCT FEATURES

- Commissioned via SmartLoop mobile app for iPhone
- Designed for installation in standard single gang wallboxes
- 5 buttons allow for dimming, toggling power, automatic sensor/ preset level operation, and scene activation
- Ideal for new construction and retrofitting existing wall controls (neutral wire is required)
- Utilizes Bluetooth mesh technology for reliable and secure wireless communication
- Indicator LED communicates device status
- Easily commissioned to control groups or individual luminaires
- Includes Screwless snap-on style decorative wallplate cover

ELECTRICAL SPECIFICATIONS

Input Power	120-277V input
RF Transmit Power	8dBm
Wireless Frequency	2.4GHz
Wireless Range (Open Air)	100ft
Wireless Protocol	Bluetooth 5.0

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-10°C / 14°F to 45°C / 113°F
Storage Temperature	0°C / 32°F to 30°C / 86°F
Humidity	5-90%
Moisture and Dust Rating	IP20


EMC COMPLIANCE

FCC	Part 15.247
-----	-------------


KTSL-WS1-UV-SG

BLUETOOTH MESH WIRELESS WALL SWITCH

WIRING SPECIFICATIONS

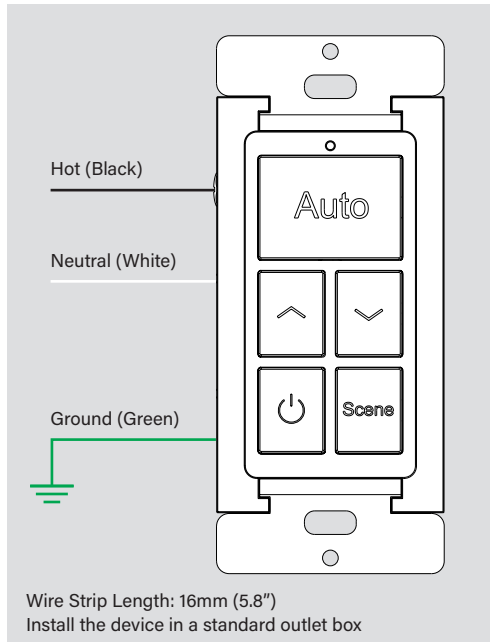

PHYSICAL SPECIFICATIONS

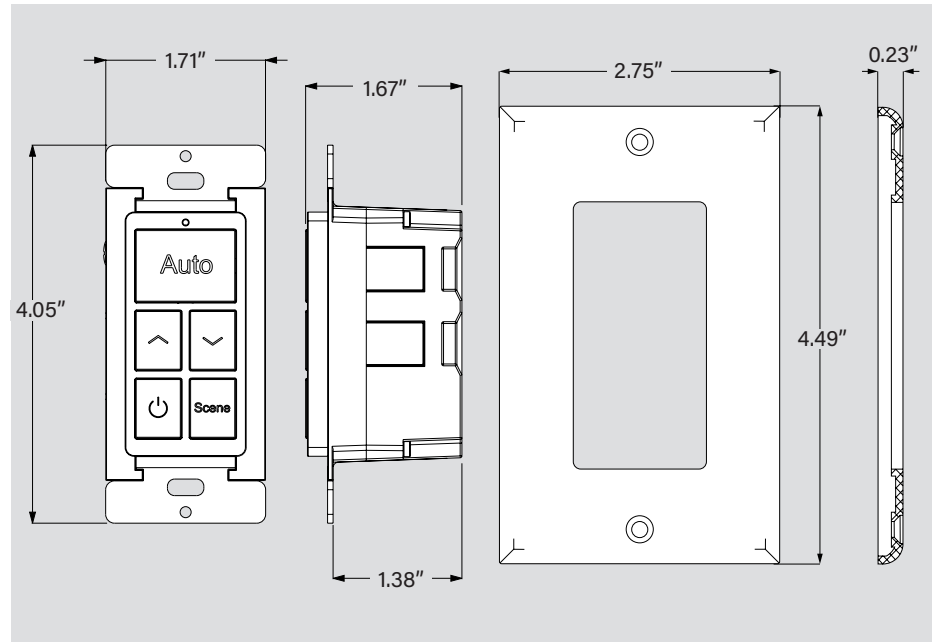

Mounting	Standard wallbox
Height	4.05"
Width	1.71"
Depth	1.67"
Weight	1.5 oz.
Case Material	Plastic

COMMISSIONING


10.1. ADD

1. Search for 'SmartLoop' on the app store for iPhone (iOS 8.0 or later, and Bluetooth 4.0 or later).
2. On the Devices page, select the Switches tab and press + to enter the Scanning page.
3. On a keypad, press and hold Auto and ^ for about 2 seconds to enter pairing mode. The Added Switches counter will then increment. Once the LED briefly flashes off and on, the button can be released. The Added Switches counter will then increment.
4. Repeat step 2 to add more switches, or press Done.

Note: A keypad will automatically exit pairing mode after 30 seconds, or if another button is pressed.

10.2. Program

1. Press the gear icon to open settings for a keypad.
2. Press the blue bar to edit the device name.

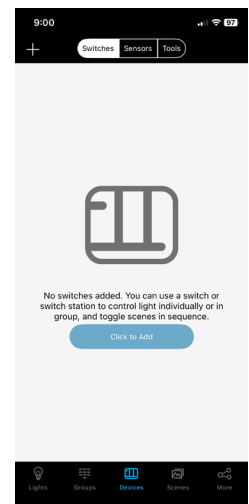



KTSL-WS1-UV-SG


BLUETOOTH MESH WIRELESS WALL SWITCH

COMMISSIONING (CONTINUED)

3. Press **Lights** or **Groups**, then check the desired light/group. Only one light/ group can be assigned per keypad.
4. Press **Next Step**.
5. Press up to 3 desired scene names to program to the keypad Scene button. If no scenes have been programmed and are still desired for keypad commissioning, see the Scenes page section.
6. Press **Save**.

10.3. DELETE

1. Press the gear icon to open settings for a keypad.
2. Press the trash can icon to delete the switch from the region.

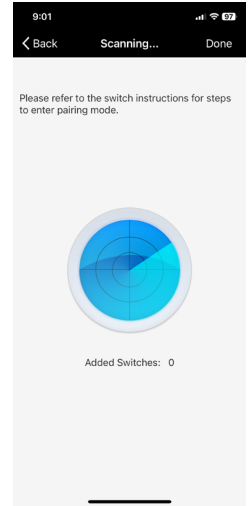

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	EASY CODE
KTSL-WS1-UV-SG	40	843654169644	HNW-45

CATALOG NUMBER BREAKDOWN

KTSL-WS1-UV-SG

1

2

3

4

5

- 1** Keystone Technologies SmartLoop
- 2** Wall Switch
- 3** Design Style 1
- 4** Universal
- 5** Single Gang Size