Lever Bypass Single Position

320 amp | 4 Terminal | Ringless



U1797-O-K3L-K2L

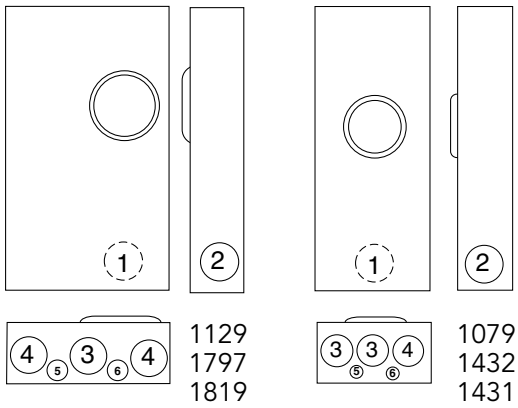



U1129-O-K3L-K2L

320 amp | 4 Terminal | Ringless | Lever Bypass | Single Position

Catalog Number	Terminal	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts					
				Line	Load		D"	W"	H"	1	2	3	4	5	6
U1079-R	4	OH	H.O.	⅜"x16 Studs		Lever	4⅞	13	38¾	3½	2½	3	3	¼	½
U1129-O-K3L-K2L	4	UG	Blank	(1) #4-600 or (2) 1/0-250	Twin #6-350	Lever	4⅞	15	30	3	2½	3	3	¼	½
U1431-R*	4	OH/UG	H.O.	⅜"x16 Studs		None	4⅞	13	38¾	3½	2½	3	3	¼	½
U1432-O*	4	UG	Blank	⅜"x16 Studs		None	4⅞	13	29¾	3½	2½	3	3	¼	½
U1819-X*	4	UG	C.P.	⅜"x16 Studs		None	4⅞	15	30	3	3	3	3	¼	½
U1797-O-K3L-K2L	4	UG	Blank	(1) #4-600 or (2) 1/0-250	Twin #6-35	Lever	4⅞	15	30	3	3	3	3	¼	½

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessory page.

***Bypass:** Lever supplies clamping action on meter spades only on the **U1431**, **U1432** and **U1819**. Lever supplies clamping action and also operates bypass device on the **U1079**, **U1129** & **U1797**.

- **Connector Kits:** Stud type units are supplied with ⅜"x16 hex head nuts with Belleville washers. Order two connector kits to cover both line and load. Order **K1539** (single #350), **K1540** (single #600) or **K1350** (twin #350). See accessories page. **Note:** The **U1129** unit has a single connector on the line side only.
- **Fifth Terminal:** For field mounted fifth terminal, order as extra **K3866** for the **U1079** & **U1431**. Order as extra K3865 for units **U1129**, **U1432**, **U1819**, and **U1797**.
- **Lug Size Range:** See accessories page for lug size range for the U1129 & U1797 units.

MILBANK
ENERGY AT WORK

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.