



ONE-BOX™ Non-Metallic Outlet Boxes

For new or retrofit construction.


New!

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
F101	43626	Single Gang Vert. / 22.5	50	50	2.280	3.720	3.510
F101H	43634	Single Gang Horiz. / 22.5	25	25	3.720	2.280	3.500
F102	43640	2-Gang Vert. / 42.0	25	25	4.110	3.740	3.510
F102D	43544	Voltage Divider	25	25	.233	3.560	3.400
F103	43641	3-Gang Vert. / 61.0	25	25	5.930	3.740	3.510
F104	43642	4-Gang Vert. / 80.0	10	10	7.740	3.740	3.510

PATENTED. OTHER PATENTS PENDING.




E170558

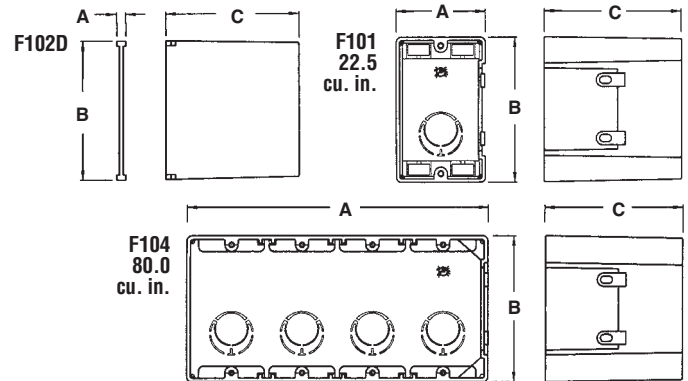

Features and Benefits

- For a variety of wall thicknesses – the ONE-BOX is removable, adjustable, and remountable even after the wall is in place
- Fast and easy to install
- Mounts directly to a wood or steel stud for a super secure installation
- Angled screws inside the ONE-BOX affix it firmly to the stud – it has no “wings” so there’s no wobble
- For both power and low voltage applications with the F102D voltage divider installed
- Two hour fire rating

F101 Installation Instructions - NEW CONSTRUCTION




Attach ONE-BOX to wood or steel stud with captive installation screws. If the box is too far forward or back, simply back the screws out and reposition.




Pull wire through the knockout connector. (Ships with installed NM cable connector.)

MOUNTS DIRECTLY TO WOOD OR STEEL STUD


F101 Installation Instructions - RETROFIT



For old work, position ONE-BOX adjacent to stud. Use box as the template to cut hole.



Pull wire. Insert ONE-BOX.



Mount ONE-BOX directly to stud with shipped in place screws.