

MC Glide Luminary Lite®

Interlocked Aluminum Armor



Armor

- Interlocked Aluminum Strip

Conductors

- Solid or Stranded Copper (Power)
- Solid Copper (Control)

Conductors Insulation

- THHN/THWN (Power)
- TFN (Control)

Assembly Covering

- Polypropylene Tape

Neutral Conductors

- White 120/208V
- Gray 277/480V

Grounding

- Insulated Green Copper Grounding Conductor

Control Cables

- 16 AWG Solid TFN Twisted Jacketed Pair (Purple/Pink)

Maximum Voltage Rating


- 600V

Maximum Temperature Rating

- 90°C (Dry)

References & Ratings

- UL 66, 83, 1479, 1569, 1581, 2556, File Reference E80042
- NEC® 250.118(I), 300.22(C), 330, 392, 396, 501, 502, 503, 504, 505, 518, 520, 530, 645, 725.136(I)(1)
- NEC® 300.22 (C) Other Spaces Used For Environmental Air (Plenums)
- Power and/or lighting as well as signal and/or control conductors per NEC® section 725.136 (I)(1)
- UL classified 1, 2, and 3, hour through (Fire) penetration product R14141
- Cable tray rated, install per NEC®
- Federal Specification A-A-59544 (formerly J-C-30B)
- Meets all applicable OSHA and HUD requirements
- May be surface mounted, fished and/or embedded in plaster
- Made in USA of US and/or imported materials
- U.S. Patent 10,431,353 | U.S. Patent 11,996,215 | U.S. Patent 12,170,157 | U.S. Patent 12,165,791 | U.S. Design Patent D935,731 | U.S. Design Patent D996,374 | U.S. Design Patent D1,015,280

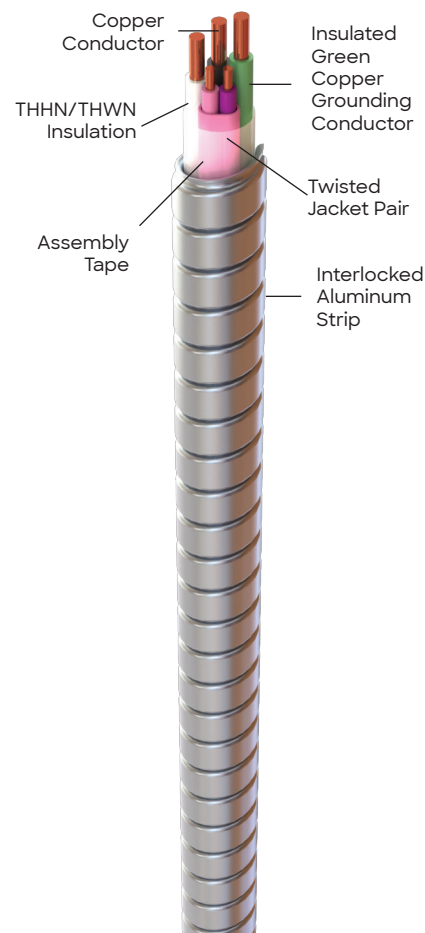

Conductor					Product Code		Approx. Weight	Approx. Armor O.D.
Trade Size	Phase Conductor AWG (Color)	Neutral Conductor AWG (Color)	Grounding Conductor AWG (Color)	Control Conductors AWG (Colors)	250' Coils	1000' Reel	(lb/1000ft)	(in)
Solid								
12-2	12-1 Solid (Black)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L00	AL04-60-L00	145	0.560
12-2	12-1 Solid (Brown)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L01	AL04-60-L01	145	0.560
12-2	12-1 Solid (Orange)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L02	AL04-60-L02	145	0.560
12-2	12-1 Solid (Yellow)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L03	AL04-60-L03	145	0.560
12-2	12-1 Solid (Red)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L04	AL04-60-L04	145	0.560
12-2	12-1 Solid (Blue)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L05	AL04-60-L05	145	0.560
12-2	12-1 Solid (Pink)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-42-L08	AL04-60-L08	145	0.560
12-3	12-2 Solid (Black, Red)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL05-42-L00	AL05-60-L00	175	0.585
12-3	12-2 Solid (Brown, Orange)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL05-42-L01	AL05-60-L01	175	0.585
10-2	10-1 Solid (Black)	10-1 Solid (White)	10-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL07-42-L00	AL07-60-L00	195	0.600
10-2	10-1 Solid (Brown)	10-1 Solid (Gray)	10-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL07-42-L01	AL07-60-L01	195	0.600

Continues on next page

MC Glide Luminary Lite®

Interlocked Aluminum Armor



Conductor					Product Code		Approx. Weight	Approx. Armor O.D.
Trade Size	Phase Conductor AWG (Color)	Neutral Conductor AWG (Color)	Grounding Conductor AWG (Color)	Control Conductors AWG (Colors)	250' Coils	1000' Reel	(lb/1000ft)	(in)
Stranded								
12-2	12-1 Stranded (Black)	12-1 Stranded (White)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L00	AL58-60-L00	148	0.565
12-2	12-1 Stranded (Brown)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L01	AL58-60-L01	148	0.565
12-2	12-1 Stranded (Orange)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L02	AL58-60-L02	148	0.565
12-2	12-1 Stranded (Yellow)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L03	AL58-60-L03	148	0.565
12-2	12-1 Stranded (Red)	12-1 Stranded (White)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L04	---	148	0.565
12-2	12-1 Stranded (Blue)	12-1 Stranded (White)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-42-L05	---	148	0.565
12-3	12-2 Stranded (Black, Red)	12-1 Stranded (White)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL59-42-L00	AL59-60-L00	180	0.590
12-3	12-2 Stranded (Brown, Orange)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL59-42-L01	AL59-60-L01	180	0.590

Note: All dimensions and weights are subject to normal manufacturing tolerances. Other conductor colors available by special order.
Special Orders are subject to lead times and minimum order quantities
MC Luminary Cable is intended for use in non-shielded applications

Barrel Packaging Solution

Conductor					Product Code	Length	Approx. Weight	Approx. Armor O.D.
Trade Size	Phase Conductor AWG (Color)	Neutral Conductor AWG (Color)	Grounding Conductor AWG (Color)	Control Conductors AWG (Colors)		(ft)	(lb/1000ft)	(in)
Solid								
12-2	12-1 Solid (Black)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-91-L00	1500	145	0.570
12-2	12-1 Solid (Brown)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-91-L01	1500	145	0.570
12-2	12-1 Solid (Orange)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-91-L02	1500	145	0.570
12-2	12-1 Solid (Yellow)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL04-91-L03	1500	145	0.570
12-3	12-2 Solid (Black, Red)	12-1 Solid (White)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL05-91-L00	1500	175	0.585
12-3	12-2 Solid (Brown, Orange)	12-1 Solid (Gray)	12-1 Solid (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL05-91-L01	1500	175	0.585
Stranded								
12-2	12-1 Stranded (Black)	12-1 Stranded (White)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-91-L00	1500	148	0.575
12-2	12-1 Stranded (Brown)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-91-L01	1500	148	0.575
12-2	12-1 Stranded (Orange)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-91-L02	1500	148	0.575
12-2	12-1 Stranded (Yellow)	12-1 Stranded (Gray)	12-1 Stranded (Green)	16-2 Solid (TPJ) (Purple, Pink)	AL58-91-L03	1500	148	0.575

Note: All dimensions and weights are subject to normal manufacturing tolerances. Other conductor colors available by special order.
Special Orders are subject to lead times and minimum order quantities.
MC Luminary® Cable is intended for use in non-shielded applications.



Scan here for
the Electrical
Cables Catalog