

## LED EMERGENCY EXIT SIGN SINGLE AND DOUBLE SIDED

| ED-EM-EXT-EL-R-S |                        |          |
|------------------|------------------------|----------|
| Part             | Description            | Quantity |
| 1                | LED Edge-Lit Exit Sign | 1        |
| 2                | Canopy                 | 1        |
| 3                | Hardware Bag           | 1        |




## READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before installation
2. All electrical connections must be in accordance with local codes, ordinances and the national electric code
3. Disconnect power at circuit breaker before installing or servicing
4. Do not use outdoors
5. Do not mount in hazardous locations, or near gas or electric heaters
6. Do not let power cords touch hot surface
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only
11. Allow battery to charge for 24 hours before first use.


## ELECTRICAL CONNECTIONS

- Make the proper AC wire connections.
- If using 120VAC, connect the black and white wires to the building utility.
- If using 277VAC, connect the orange and white wires to the building utility
- Cap off unused wires in all cases, use standard wires nuts to connect to wires.

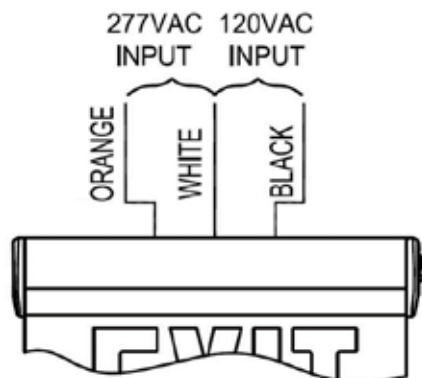

Pull out wires  
for  
wall and ceiling

Pull out wires  
for  
surface  
mounting

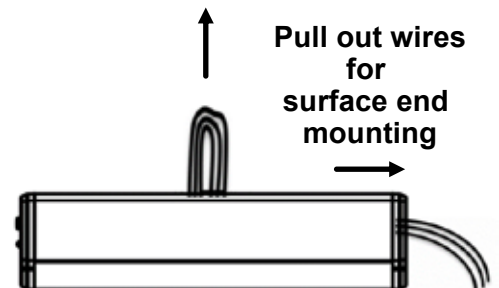

## NOTE: FIRST TURN OFF ELECTRICITY

### CEILING AND WALL MOUNTING

1. Place the sleeves onto the panel (Fig. 1). Stick correct arrows on the panel (Fig. 2), take off the sleeves.

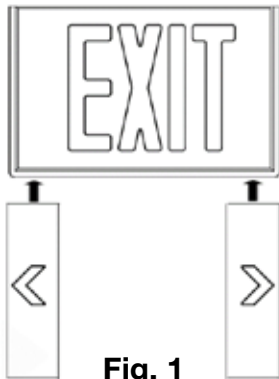


Fig. 1



Fig. 2

2. Pull out all AC wires from top of fixture for wall and ceiling mounting (Fig. 3).

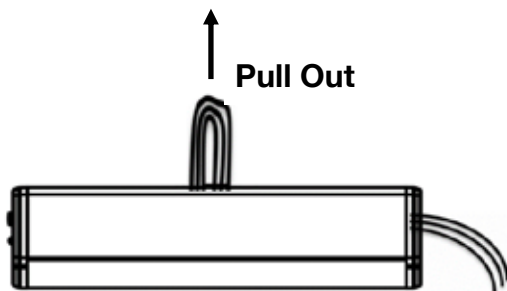


Fig. 3

3. Put the hole plug (in the package bag) to the side of fixture (Fig 4).

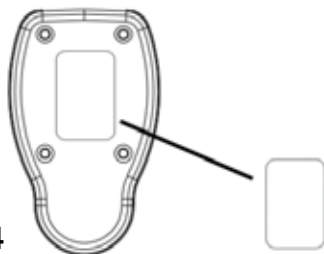


Fig. 4

4. Insert EXIT panel into main body assembly gently (Fig. 5)



Fig. 5

5. Feed AC supply wires through canopy center hole.

6. Assemble canopy onto main body assembly with (2) tapping screws (supplied) and make proper wire connections. (See ELECTRICAL CONNECTIONS).

7. Use (2) PM4-40 screws, tighten canopy to crossbar.

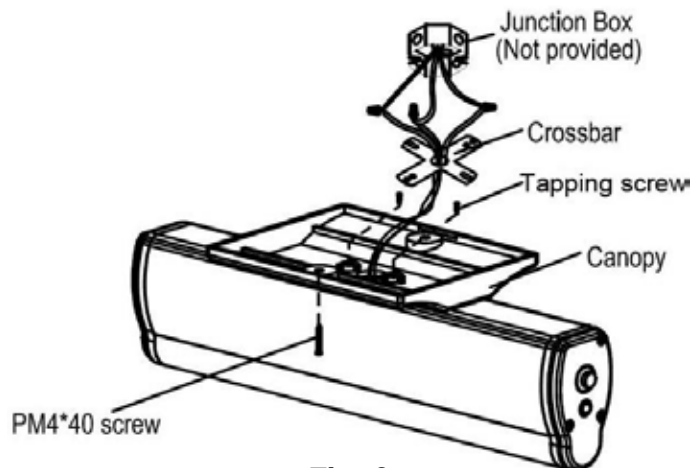


Fig. 6

8. The unit can be installed on any surface, you may rotate the EXIT panel in any angle from 0° to 180°, ceiling mounting rotate 90° become wall mounting.

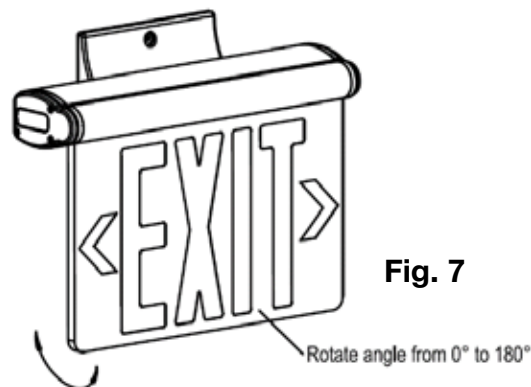


Fig. 7

### SURFACE END MOUNTING

1. Pull out all AC wires from side of the fixture for surface end mounting.

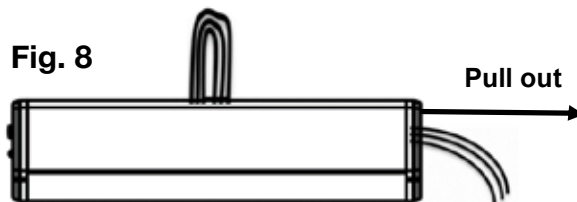


Fig. 8

2. Reference step 1, 4-7 in surface ceiling & wall mounting above for surface end mounting.

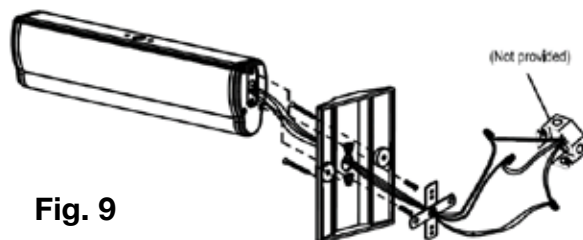


Fig. 9