

OPTIC-Line: Traditional Wall Pack

3-CCT + 3-Power + Photocell + Optic Selectable

Wall Packs



Detail Specifications:

- Finish: Bronze, Black, White
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle Selectable: Narrow, Medium, Wide
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 133° F
- Lens: Glass Lens
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Traditional metal-halide wall pack size
- Photocell included with an ON/OFF switch
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 3-Power Selectable
 - Fixtures are preset to 5000k & max wattage
- Control Options:
 - Standard Sensors
 - SILVAIR Bluetooth Mesh
 - ENVISIONLS Bluetooth
 - [Click Here](#) for More Information

Driver Options:

- CUNV: 120-347V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
 - 3P60: S-TN3G7Y
 - 3P120: S-X9QXSK
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

3P60		3P120	
WATT	LUMENS	WATT	LUMENS
40	5,800	80	11,600
50	7,250	100	14,500
60	8,700	120	17,400

Series	Wattage	Color Temp	Finish	Voltage	Photocell	Sensor ²	Emergency	Surge Protector
LED-WPFA -	TRI -	30/40 50K			PC			
	3P60		BZ	CUNV	Photocell is included. Easy quick disconnect. (PC-3/4-3PIN-LV)	(Blank)	(Blank)	(Blank)
	60/50		Bronze (Standard)	120-347V		No Sensor	No Emergency	6KV Built In
	40W		BL	HV		BMS	EMB	20KV
	3P120		Black	277-480V		Bi-Level Motion + Daylight Sensor	90 Minute Emergency Backup	20KV Surge Protector
	120/100		WH			Remote Required: (S-LINE-R)	30-120F	
	80W		White			BMS-BT		
			GRY¹			PIR		
			Gray			ENVISIONLS Bluetooth Control		
			CS¹			BMS-SL		
			Custom Color			PIR SILVAIR		
						Bluetooth Mesh		

1. Standard quickship is bronze, black, & white. Other colors are custom finishes.

2. Sensors require remote for programming

Optional Accessories (Order Separately)


Remote for Sensors

S-LINE-R



S-Line Remote

Specs and model numbers are subject to change with or without notice.


FEATURES

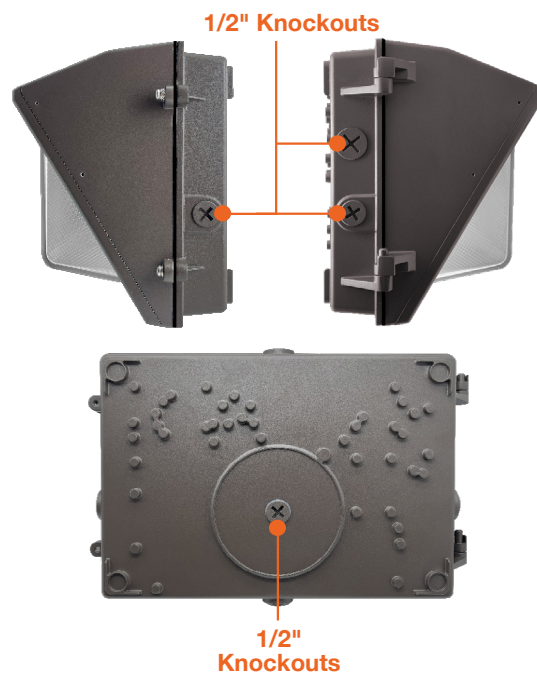

OPTIC ADJUSTABLE	3-WATT SELECTABLE	3-CCT SELECTABLE	PHOTOCELL
Narrow Medium Wide	3P60 60W 50W 40W 3P120 120W 100W 80W	5000K 4000K 3000K	ON/OFF PHOTOCELL

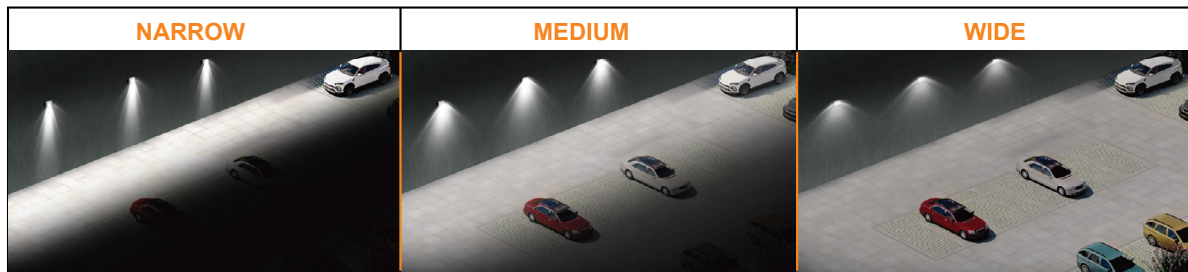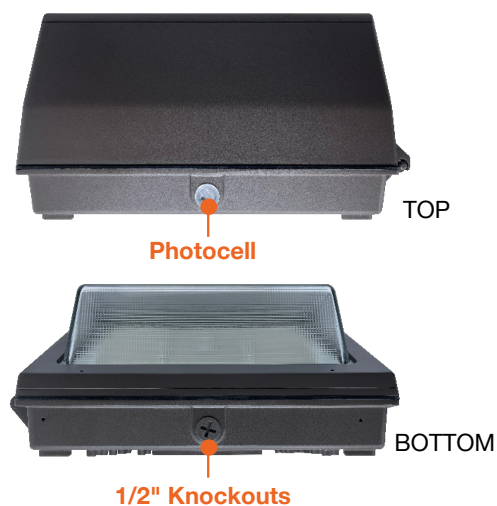

DIMENSIONS

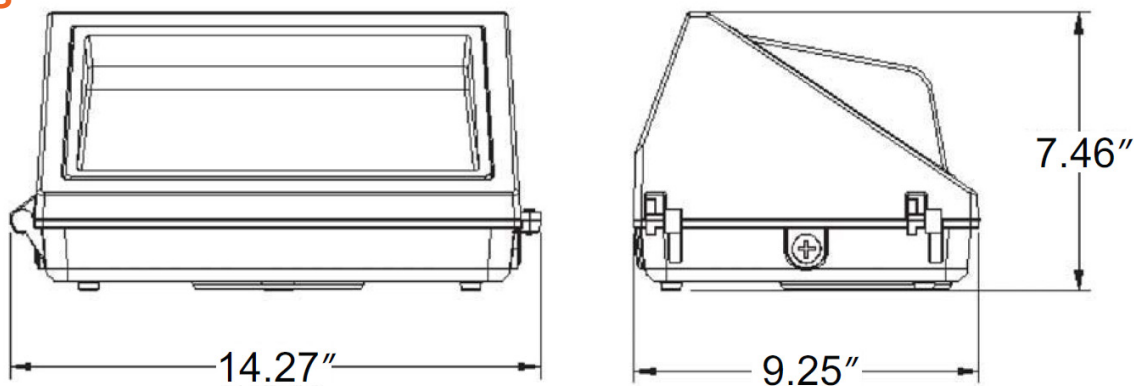



S-LINE-R

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFA-3P60-TRI-BZ-CUNV-PC	120-347V	60/50/40w	8,700/7,250/5,800	30/40/50k	>80
LED-WPFA-3P60-TRI-BL-CUNV-PC	120-347V	60/50/40w	8,700/7,250/5,800	30/40/50k	>80
LED-WPFA-3P60-TRI-WH-CUNV-PC	120-347V	60/50/40w	8,700/7,250/5,800	30/40/50k	>80
LED-WPFA-3P120-TRI-BZ-CUNV-PC	120-347V	120/100/80w	17,400/14,500/11,600	30/40/50k	>80
LED-WPFA-3P120-TRI-BL-CUNV-PC	120-347V	120/100/80w	17,400/14,500/11,600	30/40/50k	>80
LED-WPFA-3P120-TRI-WH-CUNV-PC	120-347V	120/100/80w	17,400/14,500/11,600	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors

ACCESSORIES

Accessory Model	Description
WPF-SHIELD	Cut Off Shield for WPF Wall Packs
WPF-WG	Wire Guard for WPF Wall Packs

SENSORS

Pre-Installed Accessory Model	Description
Add '-BMS' to model #	S-BMS-EXT-1: Bi level motion + daylight sensor
Add '-BMS-BT' to model #	S-BMS-EXT-1-BT: Bi level motion + daylight sensor W/ bluetooth control (EnvisioLS App)
Add: -BMS-SIL to Model #	SILVAIR Enable Bluetooth Control: PIR/Daylight/Zoning/Monitoring

EnVisionLED™ Control Options

EnVision LED offers 3 control systems compatible with our LED Fixtures for projects of all sizes and budgets.

	Basic Controls	EnVisionLS 	EnVisionLED x SILVAIR 
Description	Standard Plug In Sensors	Basic Bluetooth Wireless Control	Advanced Bluetooth Wireless Control
Recommended Quantity (but not limited to)	N/A	>40-50 Nodes	>50 Nodes
Maximum Zone Quantity	N/A	100	3,000
Commissioning Tool	Remote Only	  ENVISIONLS App 	  SILVAIR App 
Commissioning Process	Individually Set via Remote	Wireless Must be done on site	Wireless- Initial linking must be done on site. Commissioning can be done via desktop remotely.
Floor Plan Upload	N/A	N/A	Yes Add a floor plan and mark luminaires & zones via desktop
Gateway	N/A	N/A	Required only for energy monitoring, advanced scheduling, automated demand response.
Individual Luminaire Control	Yes	Yes	Yes
Luminaire Grouping Zoning	N/A	Yes	Yes
High End Power Low End Power	Yes but limited (View Remote)	Yes	Yes
Cost	\$	\$\$	\$\$\$
DLC NLC Listed	N/A	Yes	Yes
Energy Monitoring & Data Reporting	N/A	N/A	Monitor energy usage per individual zone & retrofit cost savings calculation + detailed reporting



Compatible Products:

EnVision offers a variety of nodes, sensors, & gateways that are controlled via remote, ENVISIONLS Bluetooth Mesh & SILVAIR Bluetooth Mesh on all of our 0-10V dimmable fixtures.



Individual Fixture Controls: PIR Sensor, Bi-Level Dimming, Daylight

Basic Note: -1 • ENVISIONLS Models Note: -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	RECOMMENDED FIXTURE	FEATURES
	S-TWC-PIR-1 S-TWC-PIR-BT S-TWC-PIR-SL	Twist-C Control Sensor	Sensor Ready Fixtures: Area Lights, Canopies, Flood Lights, High Bays	All models are equipped with PIR occupancy sensing, high & low end bi-level dimming, & daylight sensing.
	S-TWC-90 + S-TWC-PIR-1 S-TWC-90 + S-TWC-PIR-BT S-TWC-90 + S-TWC-PIR-SL	Twist-C Control Sensor + 90 Degree Arm	Cylinders, Strips, Wall Packs	
	S-AUD-PIR-1 S-AUD-PIR-BT S-AUD-PIR-SL	2.5m Audio Jack	Panels & Troffers	
	S-SN-PIR-1 S-SN-PIR-BT S-SN-PIR-SL	Snap In Sensor	Troffers & Wraps	

Group Controls ENVISIONLS Models Note : -BT • SILVAIR Models Note: -SL

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	S-CM-PIR-LV-BT S-CM-PIR-LV-SL	Ceiling Mounted PIR Sensor	12-24V	PIR Sensor, Bi-Level Dimming, Daylight, 360° detection, 12' Max Mounting Height	Connects to 0-10V dimmable fixtures
	S-WM-PIR-CUNV-BT S-WM-PIR-CUNV-SL	Wall Mounted PIR Occupancy Sensor, Bi-Level Dimming, Daylight	120-277V	On/Off PIR occupancy sensor, 180° detection, 30' detection @ 4' Mounting Height	Connects to LED fixtures
	S-WS-120V-USB-SL		120V	Dimming Wall Socket, Two Sockets	Floor Lamps, Other Lamps

Gateway (Silvair Only) 4.5–5.5 V DC, 2A Power over Ethernet 36–57 V DC

	MODEL #	DESIGN	VOLTAGE	FEATURES	RECOMMENDED FEATURES
	SGW-102	Wall or Ceiling Mounted	POE	Advanced Energy Monitoring Control	Connects to Silvair Controls. Gateway is not required.