




Square to Octagon Mud Rings

Application

Raised fixture covers are used to mount light fixtures in walls and ceilings. They transition any 4" square box into a 4" octagon (3-1/2" On Center) opening.

Benefits

- Transitions any 4" box into a 4" octagon opening 3-1/2" O.C.
- Ideal for mounting light fixtures, sensors, LED drivers and 40 other compatible devices
- Angled mounting slots compensate up to 12 degrees for box misalignment
- Provision for mounting device #6-32 threads
- Larger opening provides more volume for more space to work
- Four dual direction mounting ears with #8-32 threads eliminate the need for adapter bracket
- Four raised mud ring sizes, 5/8", 3/4", 1" and 1-1/4" raised
- Exclusive and patented by RACO, our adjustable mud ring features an inner ring that adjusts from 1/2" to 1-3/8" when finished depth is unknown, saving time and labor

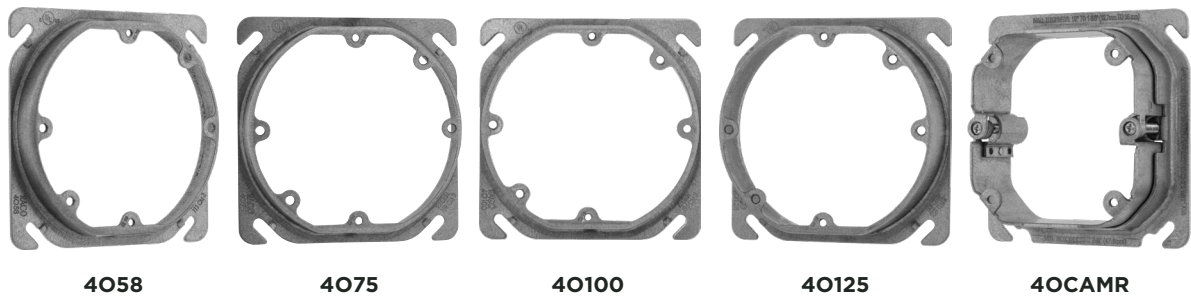

Catalog Number	Description	Carton Quantity	Carton Dimensions	Carton I2 of 5 Barcode
4O58	4" SQ TO OCTAG. 5/8" DEEP RAISED COVER	50	8.75 x 8.75 x 7.50	50050169549082
4O75	4" SQ TO OCTAG. 3/4" DEEP RAISED COVER	50	8.75 x 8.75 x 8.625	50050169549099
4O100	4" SQ TO OCTAG. 1" DEEP RAISED COVER	25	8.75 x 8.75 x 6.438	50050169549105
4O125	4" SQ TO OCTAG. 1-1/4" DEEP RAISED COVER	25	8.75 x 8.75 x 8.625	50050169549112
4OCAMR	4" SQ TO OCTAG. 1/2" TO 1-3/8" ADJ RAISED COVER	25	8.75 x 8.75 x 9.125	50050169549129

 50lb load rating max, not for ceiling fans.