

Catalog:	
Project:	
Type:	Date:
Notes:	

LED DISK LIGHT 5CCT ADJUSTABLE

TK-DSK1™ Series

Description

Tektron's TK-DSK1 is a 6" and 8" surface-mounted disk light designed for retrofit applications. Featuring a slim profile and high performance, this residential-grade panel light delivers excellent light output, energy efficiency, and a sleek, modern design.



Applications

Ideal for wet locations, perfect for use in closets, kitchens, bathrooms, and porches.

Quick Ship

TK-DSK1-R6-15W-5CCT
TK-DSK1-R8-18W-5CCT



Specification and Features

Controls / Dimming
Compatible with most TRIAC LED dimmers, offering seamless dimming from 10% to 100%. Offers 5 selectable color temperatures.

Warranty
5 Years Limited Warranty.
For more information visit us at, www.technoledlights.com/warrantyinfo

Certification
It complies with ETL Listings, Energy Star, FCC, AIR Tight, IC Rated

Installation / Mounting
Super-slim 3/4" thickness allows easy flush-mount installation, making it ideal for home improvement and remodeling applications.

Ordering Information						Example: TK-DSK1-R6-15W-5CCT	
TK	DSK1	R6	15W	5CCT	Options		
Brand	Series	Diameter	Watts	Color Temp (Color temp Selectable)	Voltage		
TK - TekTron	DSK1 - LED Disk Light Gen 1	R6 - 6 inch R8 - 8 inch	15W - 15 Watts 18W - 18 Watts	2700K 3000K 5CCT - 4000K 5000K 6000K	120V		
					Dimming		
					D - TRIAC Dimming		


LED DISK LIGHT 5CCT ADJUSTABLE

TK-DSK1™ Series

Specification and Features

Input Voltage	120V
Color Temperature (CCT)	2700K,3000,3500K,4000K,6000K
Luminous efficacy (Lm/W)	90 Lm/W
Color Rendering Index (CRI)	80+
Dimmable	TRIAC Dimming
IP Rating	44
Operating Temperature	-20°C ~ +40°C
Life Span	50,000+ Hrs


Dimensions

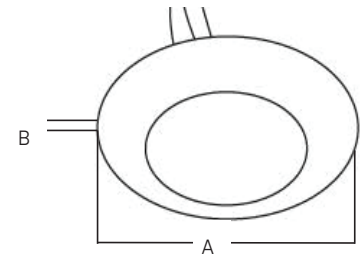

Part Number	A (Diameter)	B (Height)
TK-DSK1-R6	7.40 inches	1.25 inches
TK-DSK1-R8	7.87 inches	0.74 inches

Installation

Surface Mount Installation

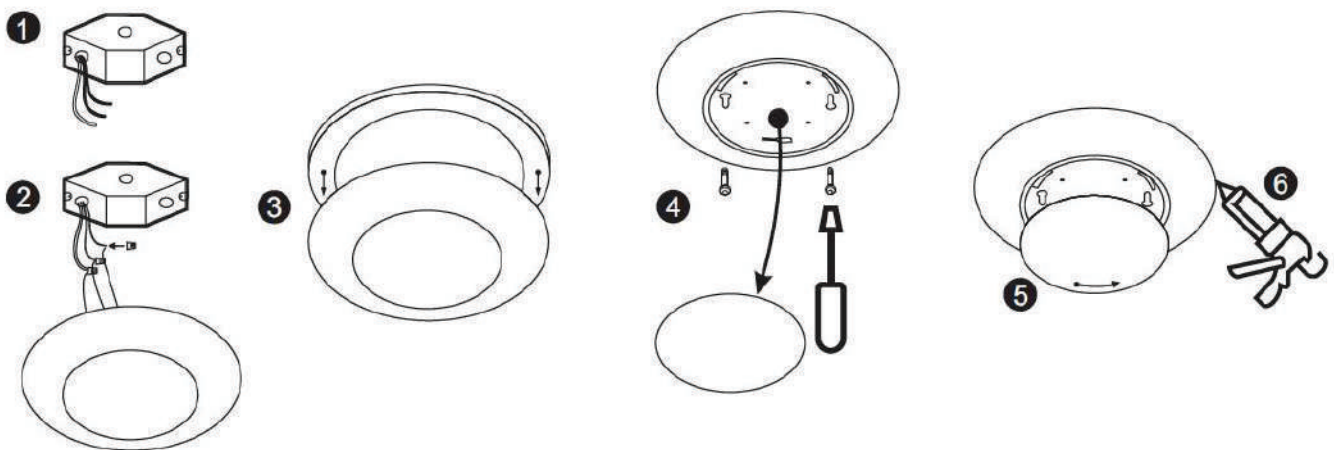

- Step 1:** Prior to installation, please install two screws (furnished) into the junction box. Do not drive screws completely to the end of the junction box.
- Step 2:** Connect supply wires to wires in fixture wiring box with proper size wire nuts or push wires into “push-in” connector, Connect white to white, black to black, and green or bare copper wire to bare copper wire.
- Step 3:** The ground wire at the service junction box may need to be secured to a ground screw.
- Step 4:** Complete the installation by twisting the diffuser on the disk light aluminum enclosure and lock the diffuser in place.
- Step 5:** For external use only, recommend applying waterproof silicone to seal around trim and ceiling.

