



Anamet Electrical, Inc.
 1000 Broadway Ave. East
 PO Box 39
 Mattoon, IL 61938

Call: (800) 230-37189

Fax: (800) 677-27063

Email: sales@anametelectrical.com


Website: www.anacondasealtite.com

Item # 38602, Type CNP - Nonconductive Conduit Liquid-Tight Flexible Non-Metallic Conduit (LFNC)

Thermoplastic PVC

Conduit shall be Anaconda SEALTITE® Type CNP. Conduit shall be constructed of smooth inner thermoplastic PVC core with outer oil-resistant and sunlight resistant PVC outer cover. Conduit shall have nylon reinforcing layer between the core and outer cover. Conduit shall be assembled with approved fittings to provide liquid-tight raceway for wiring. Conduit shall be UL listed and CSA certified as a Type "A" non-metallic conduit and be used in applications requiring a temperature

[+ more](#)

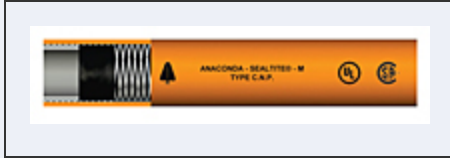

[Specifications](#) | [Installation](#) | [NEC Articles](#) | [Application](#)

Specifications

Type	CNP
Electrical Trade Size	3/8 in 12 mm
Length	100 ft 30.48 m
Packaging	Small Cartons
Inside Diameter	0.485 to 0.505 in 12.319 to 12.827 mm
Outside Diameter	0.755 to 0.775 in 19.177 to 19.685 mm
Approx. Inside Bend Radius	2.5 in 63.5 mm

Approx. Weight per 100 ft	15 lbs 6.8 kg
Color	Orange
Optional Colors	Gray
Note	Colors available on request.
Certifications	 RoHS WEEE UL Listed & CSA Certified
	
Cross-Reference #	6501-30-00 87002 LFNC-A LNM-P 10

Installation —

- Conduit used with standard connectors for non-metallic conduit Type A for easy installation. IP 67 Rated when installed with approved connectors.
- Approved for both exposed and concealed locations. Rated for temperature ranges of -4°F to +140°F (-20°C to +60°C).
- Complies with UL Standard 1660 Type A conduit File No. E-75863; CSA C22.2 File No. LL15257; and NEC Article 356.
- Easy to install and cuts easily.
- Manufactured in a full range of trade sizes from 3/8" through 2".
- Flexible, but tough; crush, abrasion and strain resistant. Where abrasion, physical abuse or constant flexing are a factor.

NEC Articles —

- Article 250.102 Equipment Bonding Jumpers
- Article 250.134 (B) Equipment Grounding
- Article 300.22 (D) Information Technology Equipment
- Article 356 Liquid-Tight Flexible Nonmetallic Conduit (LFNC-A)
- Article 501.10 (B) (2) Class I Div. 2
- Article 502.10 (A) (2) and (B) (2) Class II Div. 1 & 2
- Article 503.10 (A) (3) and (B) Class III Div. 1 & 2
- Article 620.21 Elevator Wiring Methods
- Article 645.5 (E) (2) Under Raised Floors

--

--

Application	-
--------------------	----------

Where Abrasion or Physical Abuse are Factors, Constant Flexing or Movement Temperature Range: -4°F to +140°F (-20°C to +60°C)
--