

ANAMET Electrical, Inc.
ANACONDA SEALTITE®

Anamet Electrical, Inc.
1000 Broadway Ave. East
PO Box 39
Mattoon, IL 61938

Call: (800) 230-37189

Fax: (800) 677-27063

Email: sales@anametelectrical.com


Website: www.anacondasealtite.com

[Flexible Wiring Conduits](#) > [Liquid-Tight Flexible Conduit](#) > [Sealtite® Metallic Unlisted](#) > [Type MTC - Machine Tool Conduit Liquid-Tight Flexible Metal Conduit \(LFMC\)](#) > Item # 38302

Item # 38302, Type MTC - Machine Tool Conduit Liquid-Tight Flexible Metal Conduit (LFMC)

Thermoplastic PVC jacket

Conduit shall be Anaconda SEALTITE® Type MTC. Conduit shall provide a flexible liquid-tight raceway for wiring and shall be constructed of continuously interlocked hot dipped zinc galvanized steel core with sunlight resistant PVC outer jacket. Type MTC conduit shall be used for applications where agency approvals are not required. Conduit IP 67 rated when installed with approved end connectors.

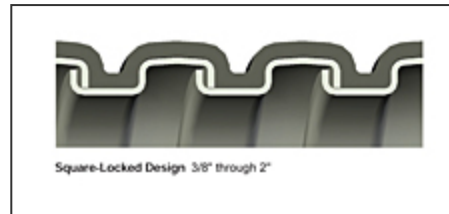

[Specifications](#) | [Installation](#) | [Application](#)

Specifications

Type	MTC
Electrical Trade Size	3/8 in 12 mm
Length	100 ft 30.48 m
Packaging	Standard Carton
Inside Diameter	0.485 to 0.505 in 12.319 to 12.827 mm
Outside Diameter	0.679 to 0.704 in 17.247 to 17.882 mm

Approx. Inside Bend Radius 1.5 in
38.1 mm

Approx. Weight per 100 ft 16 lbs
7.26 kg

Color Black

Certifications RoHS WEEE



Cross-Reference # 89201
MTLT
MTLT-3/8
VJC-10

Installation

- Conduit used with standard liquid-tight connector for easy installation. IP 67 Rated when installed with approved connectors.
- Delivers superior wiring protection where agency approvals are not required.
- Manufactured in a full range of trade sizes from 3/8" through 2".
- Smooth appearing jacket for exposed applications.
- Rated for temperature range of -4°F to +140°F (-20°C to +60°C).
- Provides liquid-tight raceway for electrical conductors.

Application

Extra Flexible. For Use in Machine Centers and Robotics
Temperature Range: -4°F to +140°F (-20°C to +60°C)