

Service Entrance Connectors

Type UF

For Underground Cable

Use:



Gland type connector for sealing and terminating Type UF cable.

Feature:

- Tapered threaded male hub

Material/Finish:

Steel/Zinc Plated



Type UF

Trade Size (inches)	Catalog Number	Dimensions in Inches			Cable Range
		A	B	C	
1/2	UF-50	1.31	0.50	1.08	14-2 and 12-2 AWG
3/4	UF-75*	1.51	0.52	1.33	14-3, 12-3, 10-3 and 8-2 AWG

*Not UL Listed

Type WC

For Oval SE/U Cable

Use:

For terminating and sealing service entrance cable entering an enclosure or conduit hub.



Feature:

- Tapered threaded male hub

Material/Finish:

Body: Zinc Die Cast

Compression Washer: Steel/Zinc Plated



Type WC

Trade Size (inches)	Catalog Number	Grommet Minimum**		Opening Maximum	Dimensions in Inches		
					A	B	C
1	WC-1004	.32 x	.50	.40 x .67	1.95	0.72	1.55
1	WC-1006	.40 x	.71	.50 x .77	1.95	0.72	1.55
1	WC-1008	.44 x	.81	.53 x .81	1.95	0.72	1.55
1-1/4	WC-1252	.51 x	.93	.59 x .98	2.00	0.72	1.92
1-1/4	WC-1253	.48 x	.87	.56 x .92	2.00	0.72	1.92
1-1/4	WC-1252N	.57 x	1.05	.65 x 1.09	2.00	0.72	1.92
1-1/2	WC-1501	.65 x	1.10	.72 x 1.24	2.42	0.74	2.52
1-1/2	WC-1502	.70 x	1.20	.86 x 1.34	2.42	0.74	2.52
1-1/2	WC-1503	.75 x	1.30	.87 x 1.37	2.42	0.74	2.52
2	WC-2001	.65 x	1.10	.72 x 1.24	2.43	0.74	2.52
2	WC-2002	.70 x	1.20	.86 x 1.34	2.43	0.74	2.52
2	WC-2003	.75 x	1.30	.87 x 1.37	2.43	0.74	2.52
2	WC-2004	.84 x	1.43	.90 x 1.50	2.43	0.74	2.52
2	WC-2004N	.94 x	1.58	1.11 x 1.73	2.43	0.74	2.52

**Connector Selection: SE dimensions are based upon average dimensions given by various manufacturers of cable. Individual manufacturers vary. Actual dimensions must be checked and proper fittings selected based upon "grommet range minimum" column.

Wire Holders

Type 1402

All Porcelain with Lag Screw



Use:

Can be used for indoor applications of 600 volts or less.

Material/Finish:

Porcelain

Lag Screw Length (inches)	Catalog Number	Dimensions in Inches		
		A	B	C
2-1/4	1402	5.36	3.07	1.85



Type 1402

Type 1401

Adjustable with Porcelain Insulator



Use:

Clamp-on adjustable wire holder for SE masts. May be used in other applications requiring insulator attachment to pipe.

Material/Finish:

Porcelain/Steel Clamps

Trade Size (inches)	Catalog Number	Dimensions in Inches		
		A	B	C
1-1/4 x 2-1/2	1401	1.62	7.25	1.75-4.00

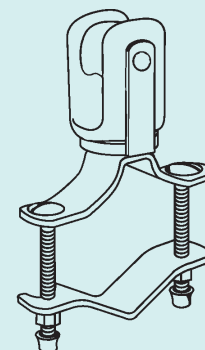

Type 1401

Aluminum Service Entrance Ells With Cover & Gasket

Type SLB

Use:

To provide access to the inside of a service raceway, for wire pulling, where the raceway changes direction. Material finish is metallic gray.

Features:

- Cover and gasket included.



Material/Finish:

Die Cast Aluminum/Powder Coated Epoxy
Fibre Gasket

Applicable Third Party Standards:

UL Standard: 514B
NEMA: FB-1

Trade Size (inches)	Catalog Number	Dimensions in Inches		
		A	B	C
1/2	SLB-50	3.24	1.22	1.42
3/4	SLB-75	3.57	1.40	2.68
1	SLB-100	4.25	1.77	1.96
1-1/4	SLB-125	5.62	2.26	2.43
1-1/2	SLB-150	6.25	2.47	2.35
2	SLB-200	6.75	2.92	2.90



Type SLB-50

Type SLB-XL

Extra Long

Use:

To provide access to the inside of a service raceway, for wire pulling, where the raceway changes direction.

Features:

- Cover and gasket included.



Material/Finish:

Die Cast Aluminum/Powder Coated Epoxy
Fibre Gasket

Applicable Third Party Standards:

UL Standard: 514B
NEMA: FB-1

Trade Size (inches)	Catalog Number	Dimensions in Inches		
		A	B	C
1-1/4	SLB-125-XL	7.87	2.56	2.35
2	SLB-200-XL	10.25	3.22	3.32



Type SLB-125-XL