

FAN/FIXTURE BOXES

Press-On Fan & Fixture Mounting Boxes

The fastest, easiest way to mount fans and fixtures. Ships ready-to-install!



Save Money with Bulk Packaging!

UL listed for fans up to 70 lbs. and fixtures up to 200 lbs.

NEW!

Catalog Number	UPC/DCI/NAED MFG #01 8997	DESCRIPTION/STYLE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB415	72167	For 1/2" or 5/8" Drywall 10.3 Cu. In.	25	25	2.250	.500	4.250
FB4150*	72182	For 1/2" or 5/8" Drywall 10.3 Cu. In.	100	100	2.250	.500	4.250
FB423†	72190	For 1/2" or 5/8" Drywall 19.3 Cu. In.	25	25	3.000	1.250	4.250
FB426	72179	For 1/2" or 5/8" Drywall 16.0 Cu. In.	25	25	2.625	.500	4.250

*Bulk packing for lower cost.

†Accommodates 1/2" or 5/8" drywall with 3/4" furring strips or hat channel.

Patented. Additional Patent(s) Pending




E170558 LR49636

CSA - Acceptable for Fan Support

Each fan/fixture box includes...

Press-on box with ready-to-tighten center screw, installed NM cable connector, second k.o., and two screws for bracket installation (screwed in place until removed by installer.)

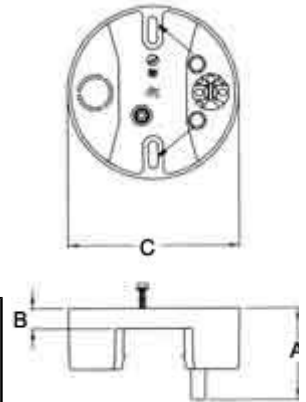


Installation Instructions

FB145

Features and Benefits

- l Ready-to-install
- l Gripping tangs press-hold to the joist while you reach for your screwdriver
- l Comes with NM connector installed and mud cover in place
- l Center screw is shipped-in-place
- l Fan/fixture installation screws are "parked"... ready for easy fan/fixture bracket installation!
- l 2-hour fire rating

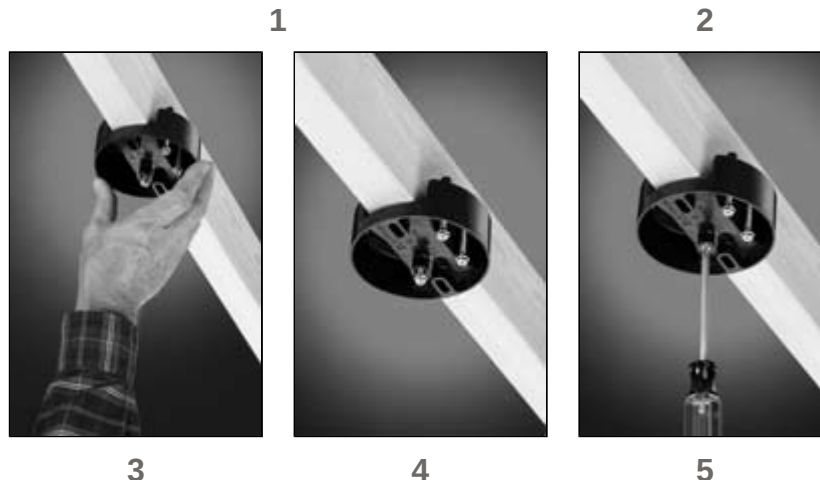

1. Press box onto joist. Gripping tangs hold the box in place temporarily.
2. Tighten center screw to secure to joist.
3. Push NM cable through connector
4. Remove two long, "parked" screws for installation of bracket.
5. Use the screws to install fan/fixture bracket through the oval slots in the box, directly into the joist.

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked

screws provided.

