

LIQUID-TIGHT FITTINGS

45° NON-METALLIC CONNECTORS

For use with non-metallic liquid-tight conduit, type B only and flexible non-metallic tubing. 45° connector provides a smooth, gradual radius bend. Wiring is easily pulled or pushed through fitting... and there are no sharp edges to strip wire.


Produced from UV rated plastic for long outdoor life.



NMLT4575

CATALOG NUMBER	UPC/DCI/NAED MFG#01 8897	TRADE SIZE	K.O. SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
GRAY:								
NMLT4538	54538	3/8	1/2	10	50	1.550	.562	1.862
NMLT4550	54550	1/2	1/2	10	50	1.596	.562	1.975
NMLT4575	54575	3/4	3/4	10	50	1.820	.545	2.237
NMLT45100	54110	1	1	5	25	2.200	.630	2.990
NMLT45125	54125	1-1/4	1-1/4	5	25	2.710	.645	3.420
NMLT45150	54150	1-1/2	1-1/2	2	10	2.960	.660	3.675
NMLT45200	54200	2	2	2	10	3.500	.670	4.060

Add suffix "BL" to catalog number when ordering in black, for example NMLT 4550BL.

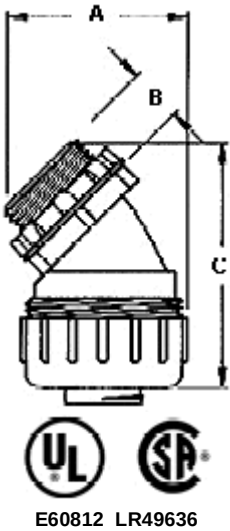

-- Select to Jump --

[Products Index](#) [Table of Contents](#) [Next](#)



Arlington Industries, Inc.

800-233-4717 | FAX 570-562-0646 | 1 STAUFFER INDUSTRIAL PARK. SCRANTON, PA 18517
[CONTACT US](#) Copyright © 2000 All rights reserved. Revised: October 07, 2003.