ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL

TYPES YA-L, YA-L-TC

UNINSULATED COPPER COMPRESSION TERMINAL

UL Listed 90° C,
600 Volts to 35kV ♦

45° and 90° angles available. Please contact Customer Service to order : 1-800-346-4175.

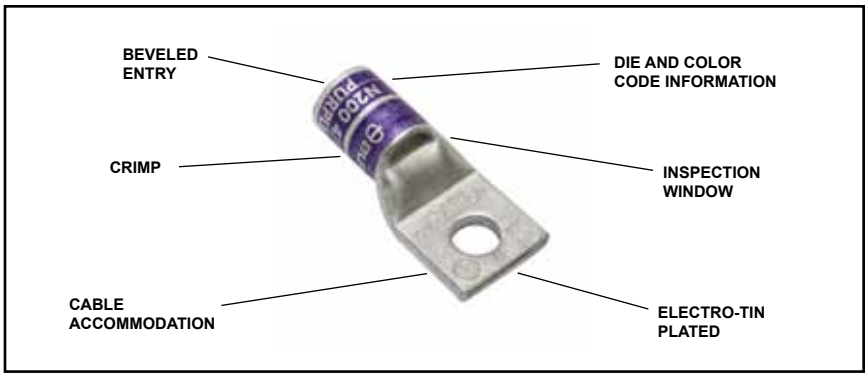

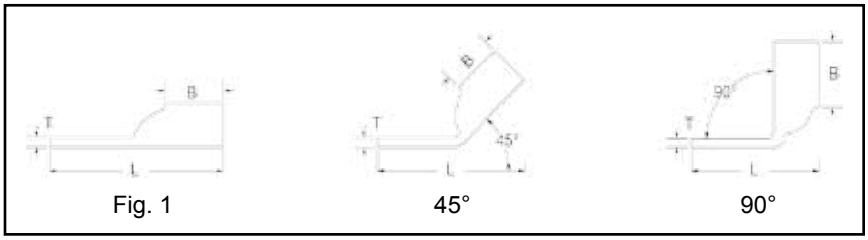

Catalog Number	Fig #	Conductor AWG	Conductor *** MM²	Stud Hole Size	Tongue Width	Figure Dimensions (B)	Figure Dimensions (T)	Figure Dimensions (L)	Installation Tooling: Dieless (# of crimps)	Installation Tooling: Mechanical MD6, OUR840, MD7-34R	Installation Tooling: Hydraulic BCT500HS, Y500CTHS	Installation Tooling: Hydraulic Y35, Y39 Y750, Y46* PAT750	Color Code	Die Index	Wire Strip Length
YAV10BOX	1	#14-#10 Str #12-#10 Sol	6	#8 - #10	0.38″	0.40″	0.06″	0.97″	Non-Ratchet: Y10D, Y10-22 Ratchet: MR8G98, MR8-9Q, Y8MRB-1, MR20, N10HT, N10HT-24	—	—	—	—	—	7/16″
YAV10R-BOX	3			#8 - #10	0.38″	0.38″	0.06″	0.53″							3/8″
YAV10-T2BOX	1			1/4″	0.53″	0.39″	0.04″	1.13″							7/16″
YAV10-R3BOX	3	#10-#12		1/4″	0.47″	0.38″	0.05″	0.55″							5/16″
YAV10-T3BOX	1	#14-#10 Str #12-#10 Sol		5/16″	0.45″	0.41″	0.05″	1.10″							7/16″
YAV10-T4BOX				3/8″	0.55″	0.45″	0.04″	1.17″							
YA8CL-BOX	1	#8 AWG #8 Weld 37/24 #6 sol. #8 sol.	† 10	#8 - #10	0.41″	0.44″	0.08″	1.16″	Y1MRTC (1) MY29-3 (1) MY29-11 (1) MRC840 (1) Y4PC834 (1) Y8MRB-1 (1) Y81KFT (1) PAT81KFT (1)	W8CVT (1) W8CRT (1) X8CRT (1)	W8CVT (1) W8CRT (1) X8CRT (1)	U8CRT (1)	Red	49	7/16″
YA8CL1-BOX				1/4″	0.44″	0.44″	0.08″	1.26″							
YA8CL2-BOX				5/16″	0.52″	0.44″	0.06″	1.38″							
YA8CL3-BOX				3/8″	0.58″	0.44″	0.06″	1.51″							
YA8CL4-BOX				1/2″	0.71″	0.44″	0.05″	1.76″							
YA6CL1-BOX	1	#6 AWG	—	#8 - #10	0.41″	0.54″	0.09″	1.27″	Y1MRTC (1) MY29-3 (1) MY29-11 (1) MRC840 (1) Y81KFT (1) Y81KFTBMH (1) PAT81KFT-18V (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	U5CRT (1) U8CABT (1)	Blue	7 or 374	9/16″
YA6CL-BOX				1/4″	0.45″	0.54″	0.08″	1.45″							
YA6CL3-BOX				5/16″	0.52″	0.54″	0.07″	1.52″							
YA6CL4-BOX				3/8″	0.63″	0.54″	0.06″	1.62″							
YA6CL-6				1/2″	0.75″	0.54″	0.12″	1.87″							
YA5CL	1	#5 AWG		1/4″	0.44″	0.81″	0.07″	1.65″		W5CRT (1) W5CVT (1) X5CRT (1)	W5CRT (1) X5CRT (1) W5CVT (1)				

* Use PUADP-1 adapter with U dies in Y46 HYPRESS™
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required
*** The MM² conductor sizes listed are the recommendations for Class 2 conductor
† The MM² conductor size listed is for both Class 2 and Class 5 conductor
▲ See tooling section of this catalog for complete tool and die listings
♦ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions
Note: All dimensions shown are for reference only.

Blue highlighted items are industry standard and most frequently ordered.