COOPER Bussmann

Fusetron®

13/32″ x 1 ½″ Time-Delay Fuses

FNM



Catalog Symbol: FNM
Dual-Element, Time-Delay
For circuits with high inrush currents
Volts: 250Vac or less
Amps: 1/10-30A
Interrupting Ratings:
— 35A (1/10-1A @ 250Vac)
— 100A (1⅛-3½A @ 250Vac)
— 200A (4-10A @ 250Vac)
— 10,000kA (1/10-10A @ 125Vac)
— 10,000A (12-30A @ 250Vac)
Agency Information: CE; UL Listed Std. 248-14, 0-30/250Vac, File E19180, Guide JDYX; CSA Certified, 1-30/250Vac, Class 1422-01, File 53787.

Electrical Ratings (Catalog Number and Amps)

FNM-1/10	FNM-8/10	FNM-2-½	FNM-6-¼
FNM-⅛	FNM-1	FNM-2-8/10	FNM-7
FNM-15/100	FNM-1-⅛	FNM-3	FNM-8
FNM-2/10	FNM-1-¼	FNM-3-2/10	FNM-9
FNM-¼	FNM-1-4/10	FNM-3-½	FNM-10
FNM-3/10	FNM-1-½	FNM-4	FNM-12
FNM-4/10	FNM-1-5/10	FNM-4-½	FNM-15
FNM-½	FNM-1-6/10	FNM-5	FNM-20
FNM-6/10	FNM-2	FNM-5-6/10	FNM-25
FNM-¾	FNM-2-¼	FNM-6	FNM-30

Carton Quantity and Weight

Amp Ratings	Carton Qty	Weight Lbs.	Kg.
0-30	10	0.125	0.057

Dimensions - in (mm)

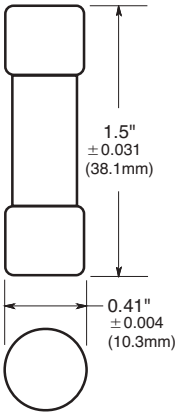



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 2143
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

Time-Current Characteristic Curves–Total Clearing

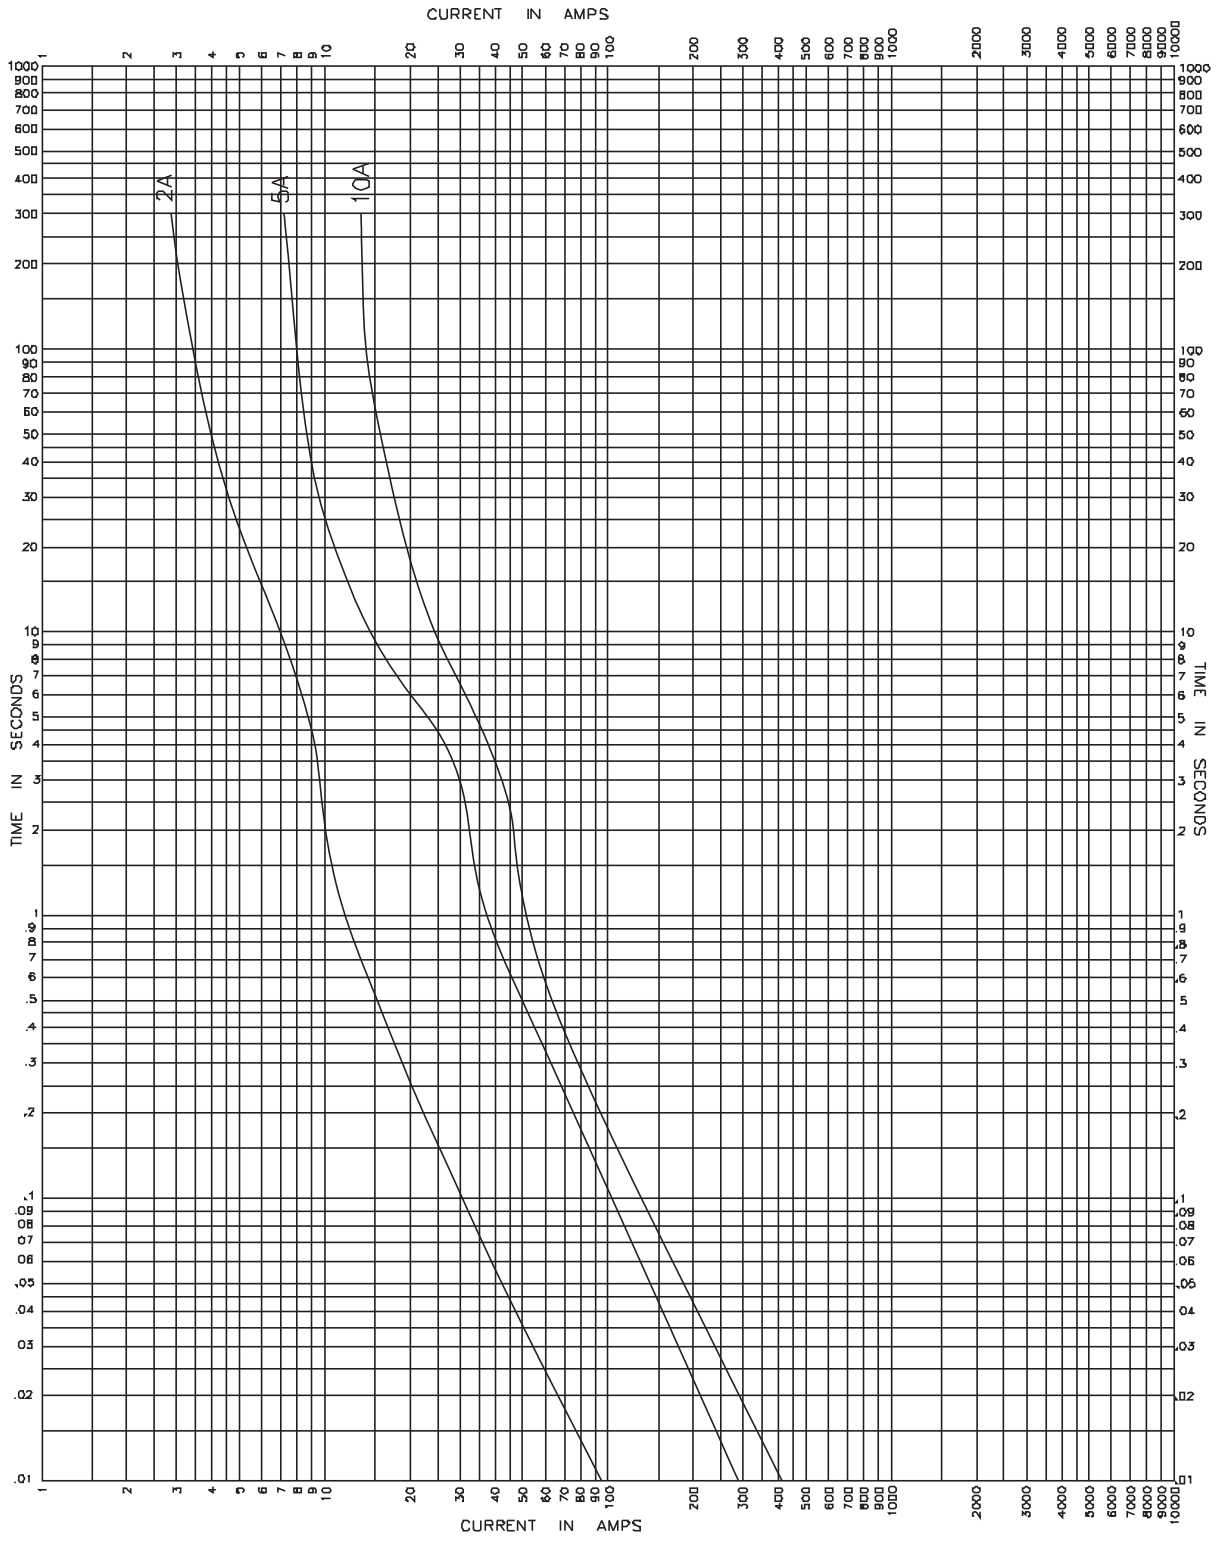

COOPER Bussmann

Time-Current Characteristic Curves–Average Melt

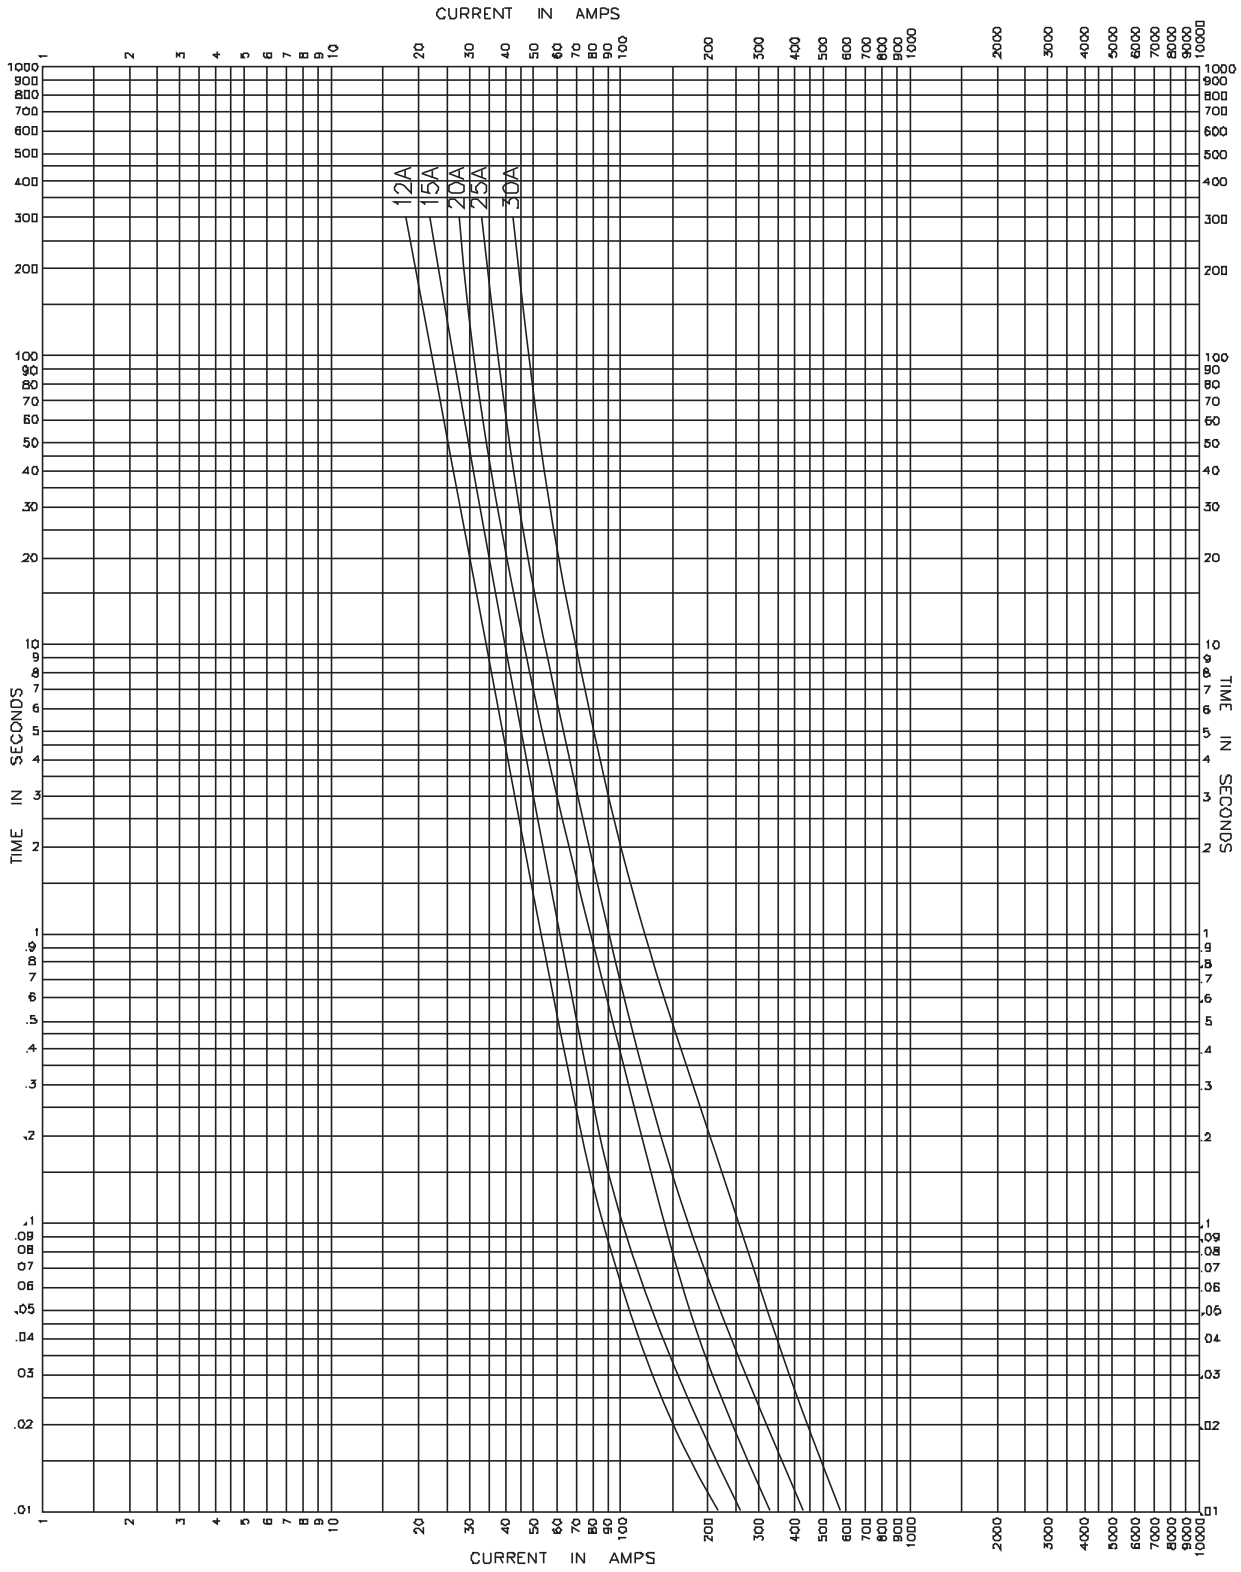

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

© 2009 Cooper Bussmann
St. Louis, MO 63178
www.cooperbussmann.com

COOPER Bussmann