


PVC COATED SPECIAL RADIUS ELBOWS

Description:

PVC Coated Elbows are available in standard & special radius dimensions and in various degrees as required. All elbows are manufactured from Calbond PVC coated conduit and meet all applicable standards.

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior Urethane coating thickness is a minimum 0.002"
- Sizes available are 1/2" to 6"
- Available in 90, 60, 45, and 30 degree bends




UL Listings Include:

- Calbond PVC coated conduit is UL/CUL listed in accordance to UL6 & ANSI C80.1 Standards
- Calbond PVC coated conduit is UL/CUL listed rigid ferrous metal conduit with polyvinyl chloride coating verified for PVC adhesion performance
- Calbond PVC coated conduit complies with NEMA RN-1
- UL File Number E226472

	RADIUS															
	12"				18"				24"				30"			
Trade Size	Item Number	B	T	WT	Item Number	B	T	WT	Item Number	B	T	WT	Item Number	B	T	WT
1/2"	PV0512SW90	21	10	2.60	PV518SW90	28	11	3.6	PV0524SW90	35	11	4.1	PV530SW90	41	11	4.9
3/4"	PV0712SW90	21	10	3.50	PV0718SW90	28	11	4.7	PV0724SW90	35	11	5.5	PV0730SW90	41	11	6.5
1"	PV1012SW90	21	10	5.00	PV1018SW90	28	11	6.0	PV1024SW90	35	11	8.0	PV1030SW90	41	11	9.0
1-1/4"	PV1212SW90	21	10	6.00	PV1218SW90	28	11	9.0	PV1224SW90	35	11	11.0	PV1230SW90	41	11	12.0
1-1/2"	PV1512SW90	21	10	8.00	PV1518SW90	28	11	11.4	PV1524SW90	35	11	13.2	PV1530SW90	41	11	15.8
2"					PV2018SW90	28	11	15.2	PV2024SW90	35	11	17.5	PV2030SW90	41	11	21.0
2-1/2"					PV2518SW90	28	11	24.3	PV2524SW90	35	11	28.0	PV2530SW90	41	11	33.6
3"					PV3518SW90	28	11	32.9	PV3024SW90	35	11	38.0	PV3030SW90	41	11	4.9
3-1/2"					PV3518SW90	28	11	39.0	PV3524SW90	35	11	45.0	PV3530SW90	41	11	54.0
4"									PV4024SW90	35	11	52.5	PV4030SW90	41	11	63.0

PVC COATED SPECIAL RADIUS ELBOWS CONTINUED

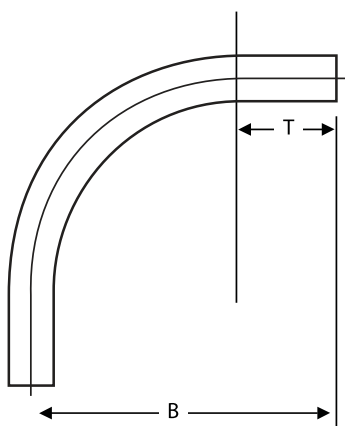

Trade Size	RADIUS															
	36"				42"				48"				60"			
	Item Number	B	T	WT	Item Number	B	T	WT	Item Number	B	T	WT	Item Number	B	T	WT
1/2"	PV0536SW90	47	11	5.5	PV0542SW90	64	12	6.2	PV0548SW90	60	12	6.9	PV560SW90	72	12	8.3
3/4"	PV0736SW90	47	11	7.3	PV0742SW90	64	12	8.2	PV0748SW90	60	12	9.1	PV0760SW90	72	12	11.0
1"	PV1036SW90	47	11	10.0	PV1042SW90	64	12	12.0	PV1048SW90	60	12	13.0	PV1060SW90	72	12	15.0
1-1/4"	PV1236SW90	47	11	14.0	PV1242SW90	64	12	16.0	PV1248SW90	60	12	18.0	PB1260SW90	72	12	22.0
1-1/2"	PV1536SW90	47	11	17.5	PV1542SW90	64	12	19.0	PV1548SW90	60	12	21.9	PV1560SW90	72	12	25.0
2"	PV2036SW90	47	11	23.3	PV2042SW90	64	12	26.3	PV2048SW90	60	12	29.2	PV2060SW90	72	12	37.0
2-1/2"	PV2536SW90	47	11	37.3	PV542SW90	64	12	42.0	PV2548SW90	60	12	46.7	PV2560SW90	72	12	56.0
3"	PV3036SW90	47	11	50.7	PV3042SW90	64	12	57.0	PV3048SW90	60	12	63.3	PV3060SW90	72	12	76.0
3-1/2"	PV3536SW90	47	11	60.0					PV3548SW90	60	12	75.0	PV3560SW90	72	12	90.0
4"	PV4036SW90	47	11	70.0					PV4048SW90	60	12	87.5	PV4060SW90	72	12	105.0
5"	PV5036SW90	47	11	93.3					PV5048SW90	60	12	116.7	PV5060SW90	72	12	140.0
6"	PV6036SW90	47	11	123.3					PV6048SW90	60	12	156.0	PV6060SW90	72	12	185.0