



STAINLESS STEEL PVC COATED FLEX CONDUIT

Features:

- The addition of the PVC coated jacket extruded over a 316 stainless steel core, allows for greater resistance to a wide range of corrosion, oils, greases and contaminants
- Interlock (double buckle) style
- Extremely flexible and durable, with smooth interior ease of installation and wire pull through
- Approx. temperature rating of 0°F to 275°F (PVC Coating)
- Approved for damp locations when used with Calbrite Flex Connectors
- Manufactured in 25' coils

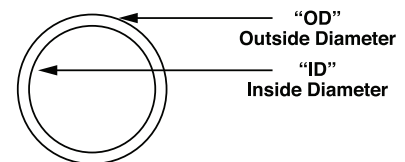

Double Buckle

Certifications and Compliances:

- NEMA 4X approved

Applications:

Flexible stainless steel conduit can be used for protecting electronic and electrical wires and cable. Suitable for corrosive environments, including pumps, motors, HVAC systems, machine tools, electrical housings and cabinetry. Good absorption of motion and vibration.

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills
- Along with other corrosive environments

Part Number	Size (in)	Outside Diameter (in)	Inside Diameter (in)	Bend Radius (in)	Weight per 25' Coil (lb)
S60500CTFC	½	0.840	0.650	4½	6.00
S60700CTFC	¾	1.050	0.840	6	8.00
S61000CTFC	1	1.300	1.020	10	11.00
S61200CTFC	1¼	1.700	1.400	11	13.00
S61500CTFC	1½	1.900	1.620	12	19.00
S62000CTFC	2	2.400	2.000	14	26.00

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit atkore.com/calbrite

