

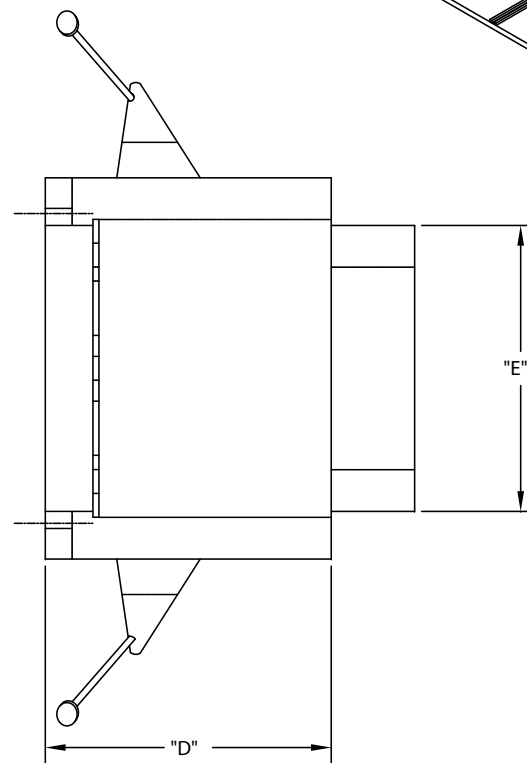


PART NUMBER	SIZE	"A"	"B"	"C"	"D"	"E"
EZ48DNZ	3 $\frac{7}{8}$ " X 3 $\frac{7}{8}$ " X 3 $\frac{7}{8}$ " Enhanced angled screw nails for quick mounting between studs eight clamps	6 $\frac{11}{16}$ "	4"	2 $\frac{5}{8}$ "	3"	2 $\frac{7}{8}$ "

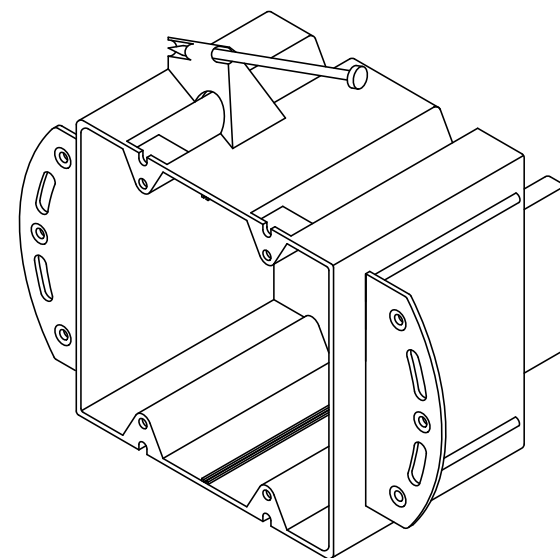

UL Listed
 UL File # R18795 & E98429
 UL Category Codes CEYY, QBWY & QCMZ
 UL Control Number 39N9
 UL 2 Hour Wall Fire Rated
 Suitable for Masonry Walls
 Material is Rigid PVC
 See NEC Article 314 for use

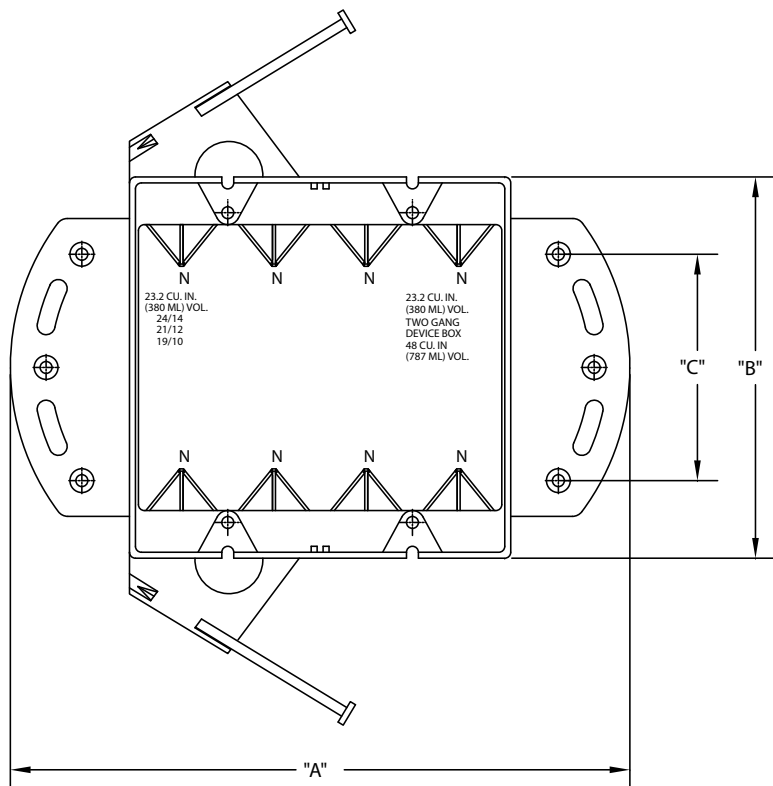

CANTEX
 INC.
 Fort Worth, Texas

48 Cubic Inch with Screw Nail
 Two Gang Nonmetallic Max Capacity Boxes

Drawn By: CD Branch Date: Ref. 12/01/07 EZ48DNZ