



WALL PACK

SERIES:DCL160S/DCL170S/DCL180S







PRODUCT FEATURES

- Traditional Impact & weather resistant fixture with die cast aluminum housings and glare free prismatic polycarbonate lenses.
- Universal mounting plate with integral wire hooks for easy hands free installation.
- 0-10V dimming as an option.
- Photocell and photocell cover are optional.
- Lumileds chip and name brand driver @ 5 year warranty.

PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	28W,50W,80W
LUMENS	3380LM,6390LM,10340LM
EFFICACY	UP TO 133LPW
INPUT VOLTAGE	120-277V
CCT	3000K, 4000K, 5000K
CRI	>70
WEIGHT	2.42lbs, 3.84lbs, 4.92lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT DIMENSIONS

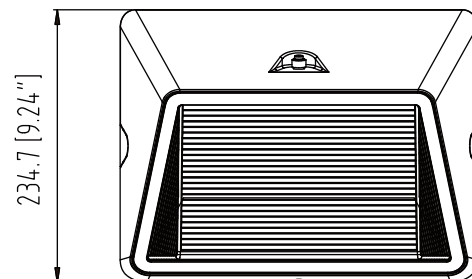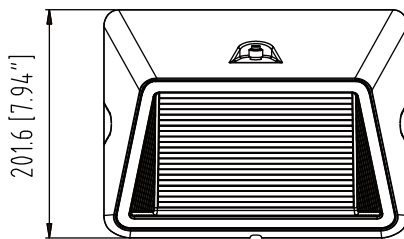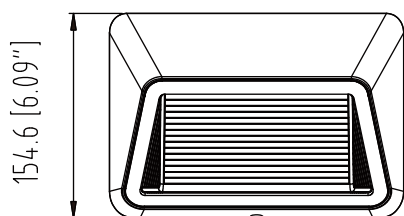

CATALOG NUMBER Example: (DCL180S-80W-40K-V8-D-PC-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	HOUSING FINISH
DCL160S	28W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	D = Dimming N = Non-Dimming	PC = Photocell NA = None	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black
DCL170S	50W					
DCL180S	80W					

PHOTOMETRY

