

WALL PACK

Our P/N: DCL150S




PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	28W
LUMENS	3300LM
EFFICACY	UP TO 118LPW
INPUT VOLTAGE	120-277V
CCT	3000K,4000K,5000K
CRI	>70
WEIGHT	6lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Traditional Impact & weather resistant fixture with die cast housings and glare free prismatic polycarbonate lenses.
- Universal mounting plate with integral wire hooks for easy hands free installation.
- 0-10V dimming @ 5.1 DLC standard.
- Photocell and photocell over are optional.
- Lumileds chip and name brand driver @ 5 year warranty.

PRODUCT DIMENSIONS

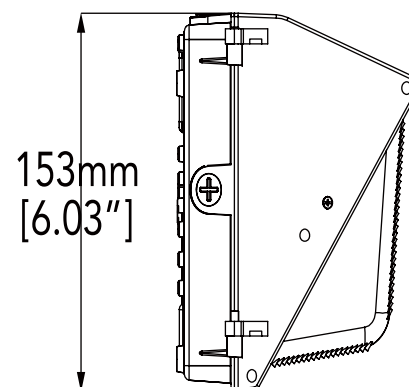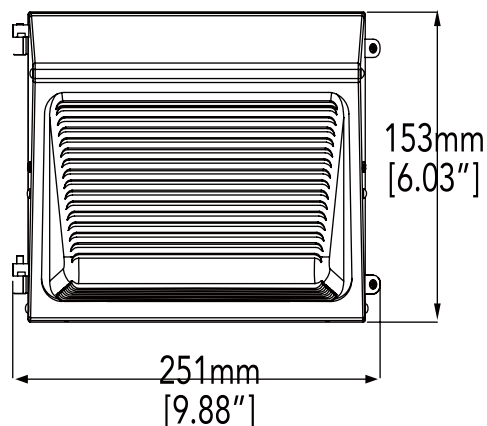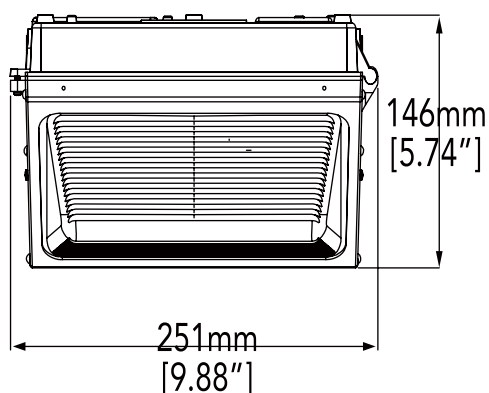

CATALOG NUMBER Example: (DCL150S-28W-40k-V8-N-NA-NA-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	SURGE PROTECTOR	HOUSING FINISH
DCL150S	28W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	N = Non-Dimming D = Dimming	NA = None PC = Photocell	NA = None S1 = Surge Protector	BZ = Bronze SL = Silver WH = White GY = Gray BK = Black

PHOTOMETRY

