


LED BOLLARDS

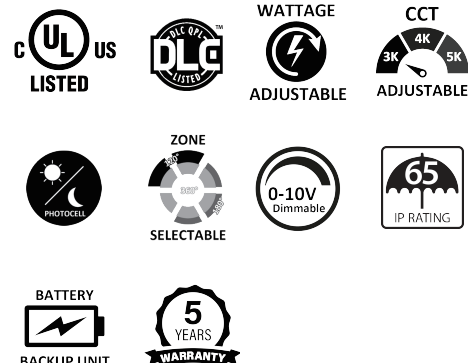

Product Specification

P/N	ERB800	RBL300	RBL200	SRB800	RBL400	SSB600
Size and Shape	Round 8"				Round 6"	Square 6"
Height (to luminous center)	37"			35"	30"	36"
Driver	120-347Vac, 50/60 Hz, 0-10V Dimmable					
Wattage	15-20-25W adjustable		25W	15-20-25W adjustable		
Efficacy	120 lm/W	105 lm/W	70 lm/W	120 lm/W		
CCT	3000K-4000K-5000K adjustable					
CRI	>70					
Distribution	120°-180°-360° adjustable	360°		120°-180°-360° adjustable		90°-180°-360° adjustable
Photocell	with on/off switch		not available	with on/off switch		
Surge Protection	Built-in Surge Protection: 4kV/6kV					
Emergency Backup	(optional) 7W, 90 mins, starting temp. from -20°C					
Ingress Protection	IP65					
Life Span	L70 > 50,000 hours @25°C					
Certification	UL Listed for Wet Locations					
DLC 5.1	Premium	Not Listed		Premium		
Warranty	5-year warranty					
Accessory	Optional reinforced sleeve for enhanced vandal resistance					

Lighting your Way Home, Bright and Safe

Our bollards provide reliable and adaptable lighting solutions for pathways, parks, campuses, and high-end facilities.

With features like adjustable CCT, wattage, and distribution zone, our bollards adapt to almost any environment. The IP65-rated housing ensures lasting protection, DTD photocell saves energy and emergency backup enhances security. Reinforced sleeve provides vandal-resistance protection.