


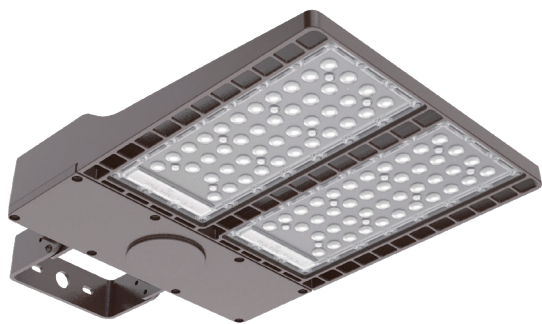

AREA LIGHT

SERIES: FSL530/FSL540/FSL550


PRODUCT SPECIFICATIONS

SYSTEM WATTAGE	100W/150W,200W, 250W/300W
LUMENS	13500LM/20250LM,27000LM, 33750LM/40500LM
EFFICACY	UP TO 135LPW
INPUT VOLTAGE	120-277V, 347-480V
CCT	3000K, 4000K, 5000K
CRI	>70
WEIGHT	7.06lbs,9.92lbs,16.76lbs
AMBIENT TEMP.	-30-40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years

PRODUCT FEATURES

- Industrial grade area light family with multiple mounting configurations for maximum application versatility.
- Impact & weather resistant fixture with die cast aluminum housings and polycarbonate T2,T3,T4,T5 Optic lenses.
- 3/7 pin twist lock receptacle as optional.
- 0-10v dimming as an option.
- Name Brand chip and high quality driver @ 5 year warranty.




PRODUCT DIMENSIONS

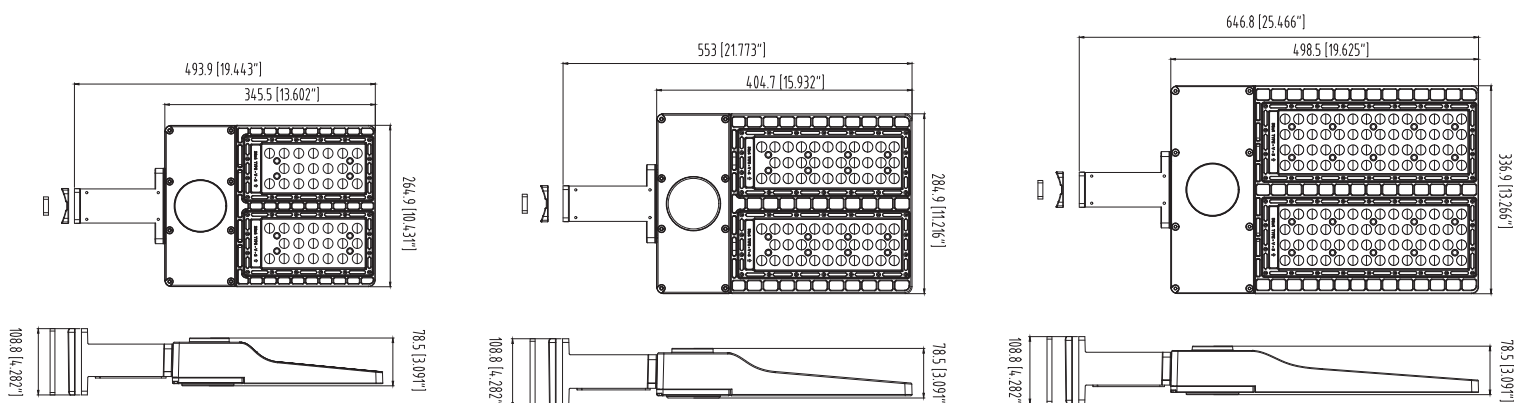

CATALOG NUMBER Example: (FSL540-250W-40K-V8-D-PC-T2-S1-BZ-EA)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	Distribution	SURGE PROTECTOR
FSL530	100W 150W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V V9 = 347-480V	D = Dimming N = Non-Dimming	PC = Photocell NA = None MS = Motion Sensor	T2=TYPE II T3=TYPE III T4=TYPE IV T5=TYPE V	NA = None S1 = Surge Protector
FSL540	200W					HOUSING FINISH	MOUNTING
FSL550	250W 300W					BZ = Bronze SL = Silver WH = White GY = Gray BK = Black	SF = Slip Fitter TR = Trunnion EA = Extension Arm

PHOTOMETRY

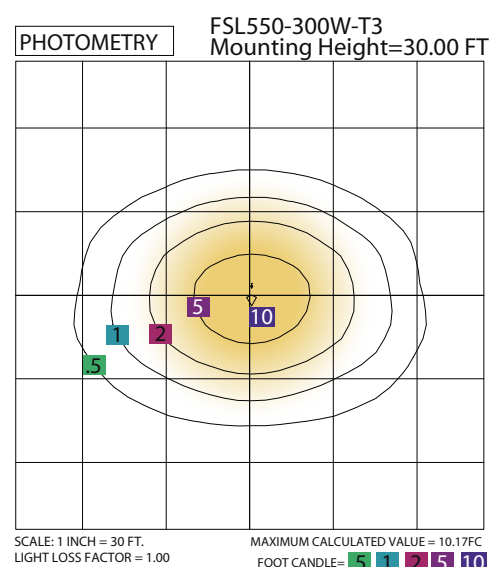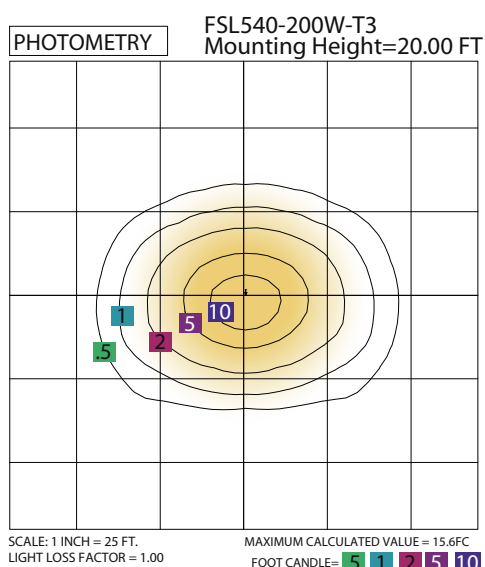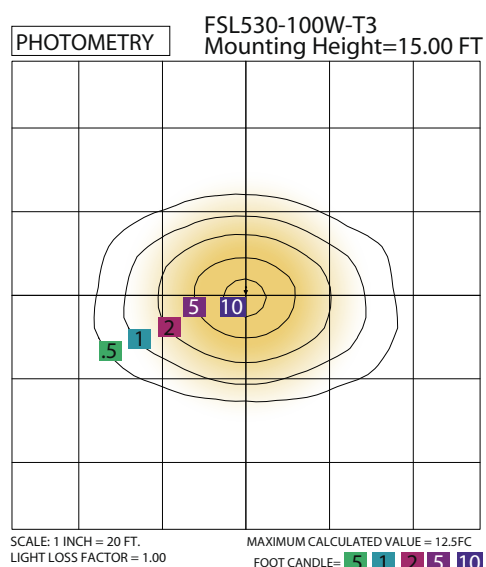

ADDITIONAL PHOTOMETRICS AVAILABLE ONLINE

MOUNTINGS/ACCESSORIES

EXTENSION ARM/STANDARD SLIP FITTER (S2)/TRUNNION

