

RH-LED-XX-XXXPS-8CSB-VDIM /G2

ROUND LED HIGH BAY FIXTURE



Round High Bay Fixture, Wattage Adjustable, CCT Adjustable,
120-277V Input, 90 deg lens, 0-10V Dimming,
Built-in sensor receptacle, Standard black housing, J-Hook Included

PRODUCT FEATURES

- Wattage Adjustable. (see Performance Specifications for details)
- CCT Adjustable. Adjust CCT between 3000K, 4000K, or 5000K
- Sensor Receptacle designed to accept easy screw-in installation of optional sensors
- Powered by 0-10V dimming LED driver
- J-Hook mounting accessories included
- 6' cord for input and dimming wires
- Powder-coated aluminum housing; Polycarbonate lens
- Ribbed lens to reduce glare
- Low optical flicker
- Built-in 6kV surge protection
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- IP65 rated, wet location



10 YEAR
LIMITED WARRANTY


PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Nominal Size	Wattage Adjustable	CCT Adjustable	Lumens	Efficacy	Input Voltage
RH-LED-11-100PS-8CSB-VDIM /G2	11" Circular	100/70/50W	3000K 4000K 5000K	15,290	150 lm/W	120-277V
RH-LED-11-150PS-8CSB-VDIM /G2	11" Circular	150/100/70W		22,490	150 lm/W	
RH-LED-12-200PS-8CSB-VDIM /G2	12" Circular	200/150/100W		31,640	158 lm/W	
RH-LED-13-240PS-8CSB-VDIM /G2	13" Circular	240/200/150W		37,010	156 lm/W	

Nominal Values above represent output when set to 5000K, please see page 3 for detailed output numbers

Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

WATTAGE ADJUSTABLE AND CCT ADJUSTABLE

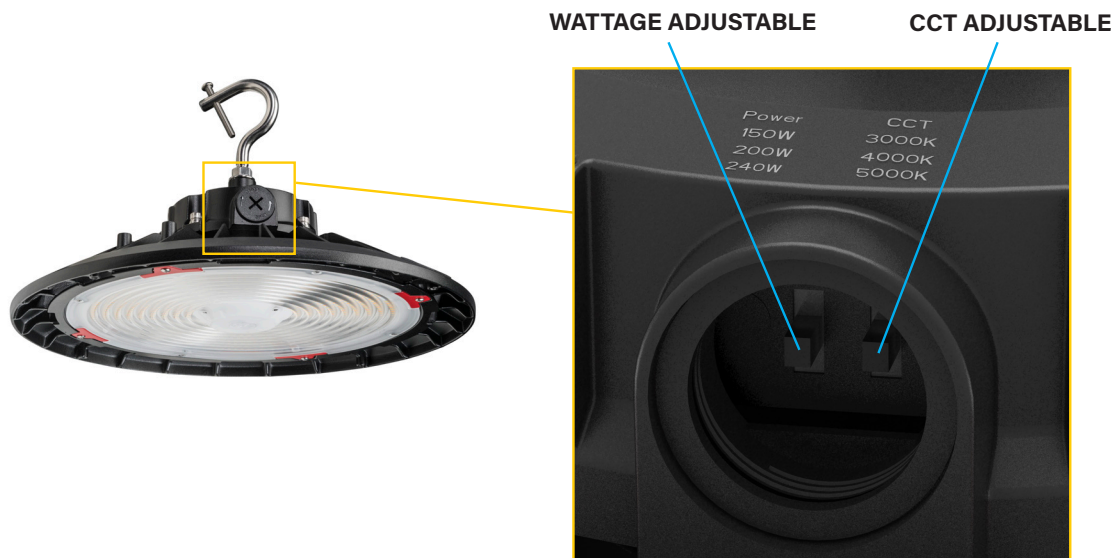

Specifications subject to change. Last revised on 09.23.25

RH-LED-XX-XXXPS-8CSB-VDIM /G2

ROUND LED HIGH BAY FIXTURE

PERFORMANCE SPECIFICATIONS DETAILED

Catalog Number	Nominal Size	Wattage Adjustable	CCT Adjustable	Lumens	Efficacy	Input Voltage	Dimmable	CRI
RH-LED-11-100PS-8CSB-VDIM /G2	11" Circular	100W	3000K	14,480	140 lm/W	120-277V	0-10V	> 80
			4000K	16,230	164 lm/W			
			5000K	15,290	150 lm/W			
		70W	3000K	10,920	149 lm/W			
			4000K	12,050	169 lm/W			
			5000K	11,680	159 lm/W			
		50W	3000K	7,780	155 lm/W			
			4000K	8,430	171 lm/W			
			5000K	8,330	166 lm/W			
RH-LED-11-150PS-8CSB-VDIM /G2	11" Circular	150W	3000K	21,290	141 lm/W	120-277V	0-10V	> 80
			4000K	23,580	163 lm/W			
			5000K	22,490	150 lm/W			
		100W	3000K	14,740	154 lm/W			
			4000K	16,090	171 lm/W			
			5000K	15,810	165 lm/W			
		70W	3000K	11,030	159 lm/W			
			4000K	11,910	175 lm/W			
			5000K	11,850	171 lm/W			
RH-LED-12-200PS-8CSB-VDIM /G2	12" Circular	200W	3000K	29,350	147 lm/W	120-277V	0-10V	> 80
			4000K	32,330	168 lm/W			
			5000K	31,640	158 lm/W			
		150W	3000K	23,440	155 lm/W			
			4000K	25,350	173 lm/W			
			5000K	25,010	166 lm/W			
		100W	3000K	15,710	162 lm/W			
			4000K	16,660	178 lm/W			
			5000K	16,780	174 lm/W			
RH-LED-13-240PS-8CSB-VDIM /G2	13" Circular	240W	3000K	34,330	144 lm/W	120-277V	0-10V	> 80
			4000K	37,920	167 lm/W			
			5000K	37,010	156 lm/W			
		200W	3000K	30,400	148 lm/W			
			4000K	33,520	170 lm/W			
			5000K	32,920	161 lm/W			
		150W	3000K	24,960	155 lm/W			
			4000K	26,950	172 lm/W			
			5000K	26,920	167 lm/W			


Note: Color uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

RH-LED-XX-XXXPS-8CSB-VDIM /G2


ROUND LED HIGH BAY FIXTURE

PHOTOMETRIC SPECIFICATIONS (RH-LED-11-100PS-8CSB-VDIM /G2)


ISOCANDELA PLOT

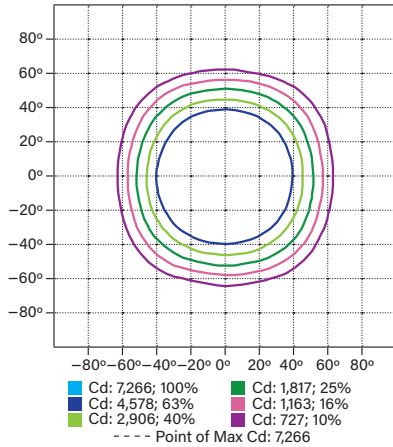

POLAR CANDELA DISTRIBUTION

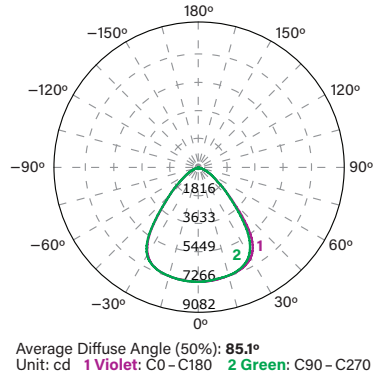


AVERAGE ILLUMINANCE EFFECTIVE FIGURE

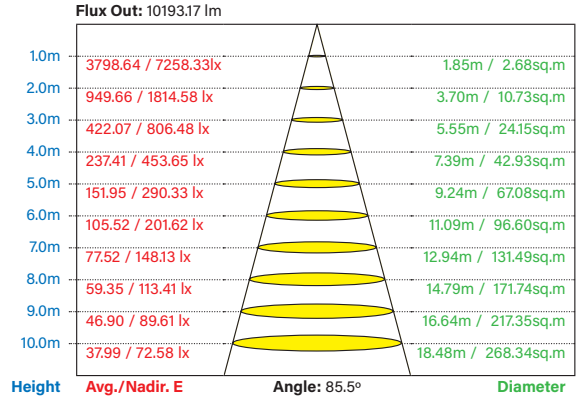


PHOTOMETRIC SPECIFICATIONS (RH-LED-11-150PS-8CSB-VDIM /G2)


ISOCANDELA PLOT

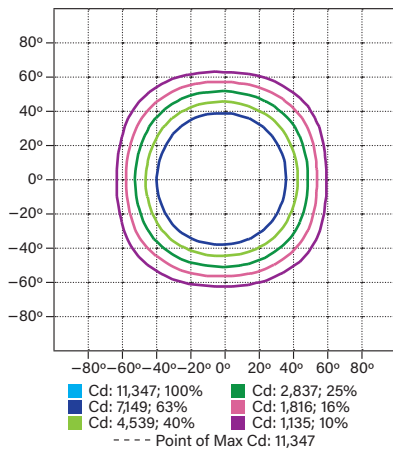

POLAR CANDELA DISTRIBUTION

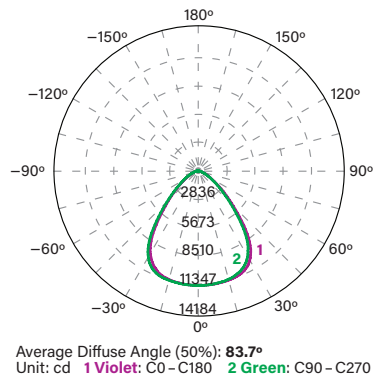


AVERAGE ILLUMINANCE EFFECTIVE FIGURE

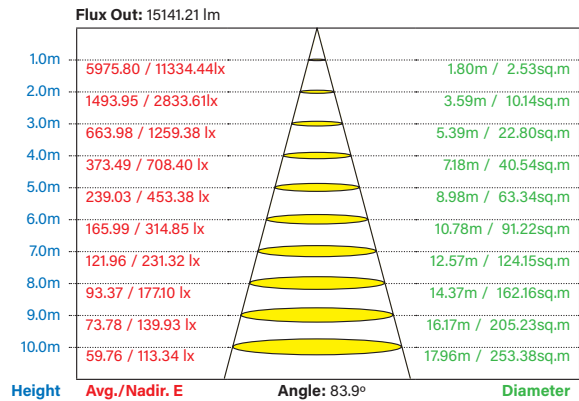


PHOTOMETRIC SPECIFICATIONS (RH-LED-12-200PS-8CSB-VDIM /G2)


ISOCANDELA PLOT

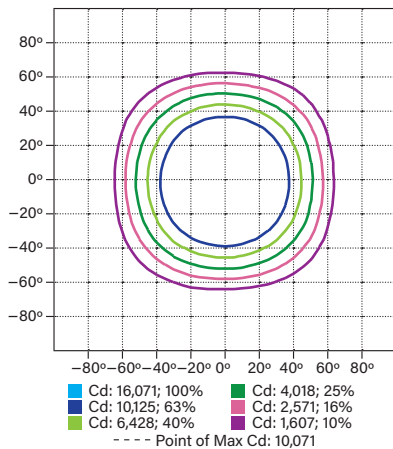

POLAR CANDELA DISTRIBUTION

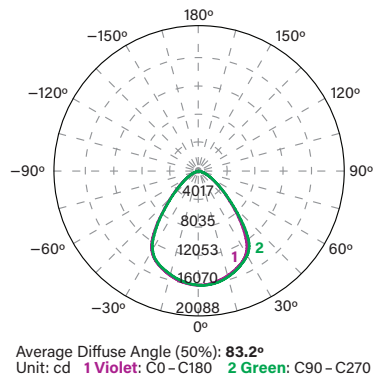

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

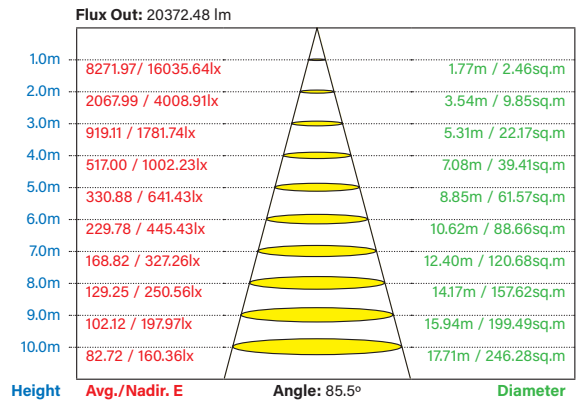


RH-LED-XX-XXXPS-8CSB-VDIM /G2


ROUND LED HIGH BAY FIXTURE

PHOTOMETRIC SPECIFICATIONS (RH-LED-13-240PS-8CSB-VDIM /G2)


ISOCANDELA PLOT

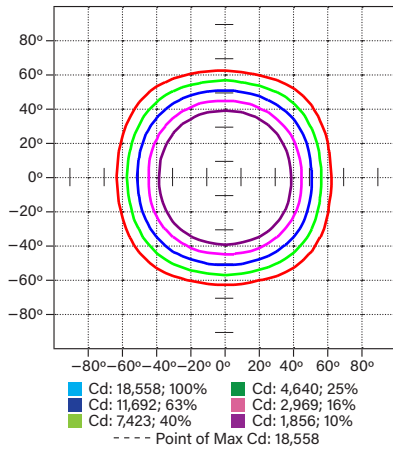

POLAR CANDELA DISTRIBUTION

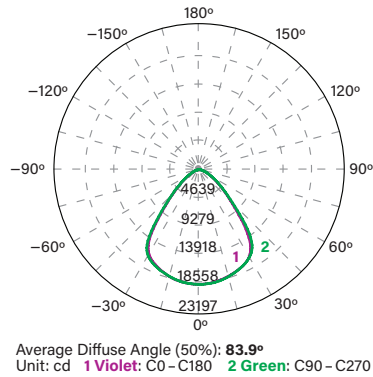

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

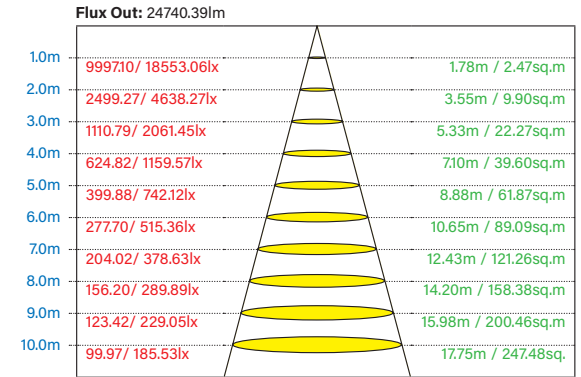


Curves show illuminated area and average illumination when lamp is at various distances.

PHYSICAL SPECIFICATIONS


J-HOOK

RH-LED-11-100PS-8CSB-VDIM /G2
RH-LED-11-150PS-8CSB-VDIM /G2

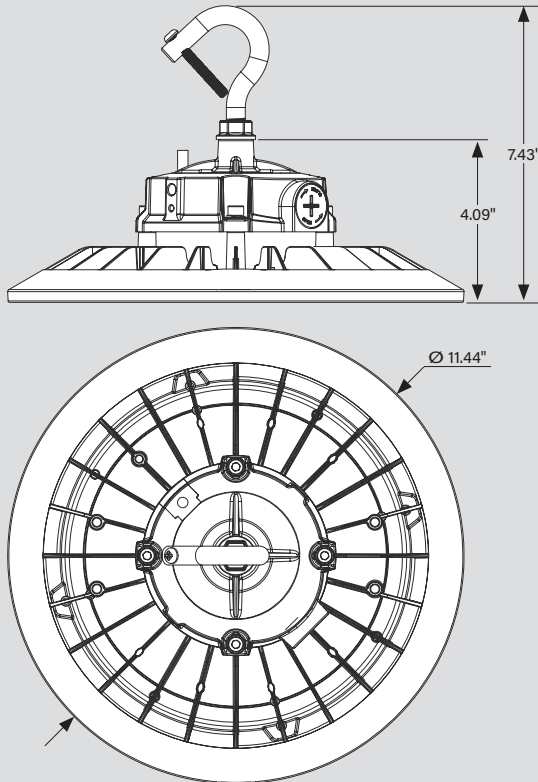

J-HOOK

RH-LED-12-200PS-8CSB-VDIM /G2
RH-LED-13-240PS-8CSB-VDIM /G2

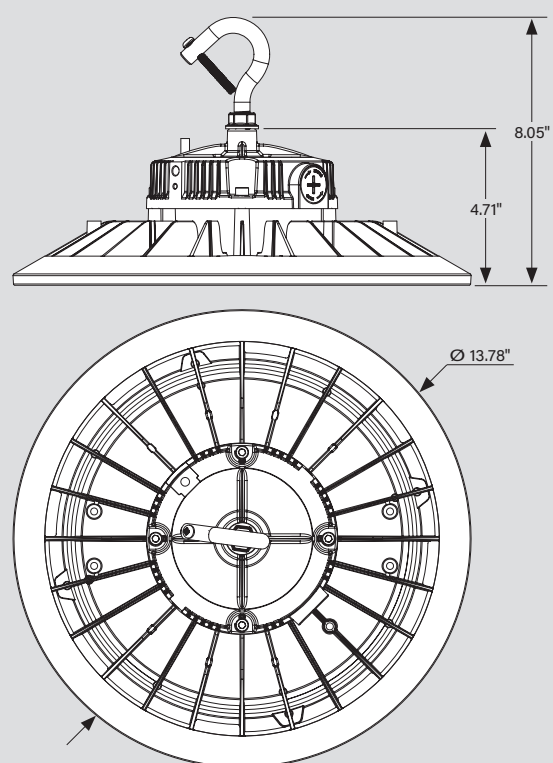


RH-LED-XX-XXXPS-8CSB-VDIM /G2

ROUND LED HIGH BAY FIXTURE

QUICK-INSTALL

1. Ensure power is off to the fixture.
2. Remove 1/2" knock-out (KO) plug.
3. Screw in sensor head.
(see illustrations)
4. Re-connect power when ready.
5. Program desired settings as needed with Remote Control.

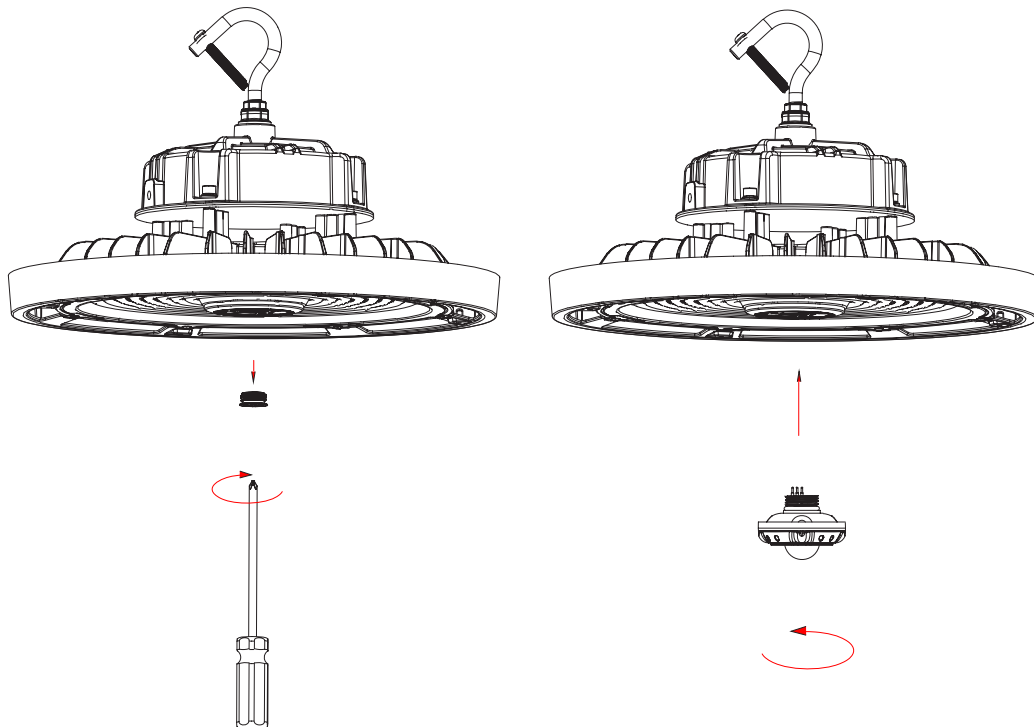

ACCESSORIES

SENSORS/CONTROLLERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/FC3**	KTSL-FC3-12V-PKO-PIR	Bluetooth mesh screw-in PIR occupancy sensor with built-in fixture controller for SmartLoop LLLC system	843654138862	OCW-60
	/FC4	KTSL-FC4-12V-PKO	Bluetooth mesh screw-in PIR occupancy sensor with built-in fixture controller for SmartLoop LLLC system	843654149066	RUN-10
	/PIR	KTS-PIR3-12V-PKO /G2	Screw-in PIR multifunction sensor, preset for 10 min hold time, ∞ min standby time at 50% dim, daylight	843654146447	GLF-99
	/MW3	KTS-MW3-12V-PKO	Screw-in microwave multifunction sensor, preset for 10 min hold time, ∞ min standby time at 50% dim, daylight disable	843654135212	TRM-32

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

** When installing on Our highbay lights and an IP tight connection is desired, use the large gasket provided with the sensor to ensure proper electrical connection and water tight seal. Hand tighten only.



Field-Installable (field-installable purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KTS-MW3-REMOTECONTROL	Remote control for KTS-MW3-12V-PKO and KTS-PIR3-12V-PKO sensors, used to set and adjust all sensor settings	843654132020	XSR-61

RH-LED-XX-XXXPS-8CSB-VDIM /G2

ROUND LED HIGH BAY FIXTURE

ACCESSORIES (CONTINUED)

CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/L515P	KT-P-L515P	125V NEMA L5-15P twist lock plug	843654123486	GEW-06
	/L615P	KT-P-L615P	250V NEMA L6-15P twist lock plug	843654138619	VPX-09
	/L715P	KT-P-L715P	277V NEMA L7-15P twist lock plug	843654123493	ETV-78

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Note: For cord sets not listed here, please contact your Our sales rep.

EMERGENCY BACKUPS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/EM	KT-EMRG-LED-40SD-5000-CEN /SF	One Piece 40W Constant Wattage Design with Self Diagnostics. Approx 5000 lumens, Single Flex Cable with Included J-Box, 120-277V Input. CEC T20 Compliant.	843654144320	UGW-62

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

† Factory installation of emergency backup units will automatically include any relevant mounting bracket.

MOUNTS/BRACKETS

Field-Installable (field-installable purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-RHLED-JBOX-PM /G2	J-Box Optimized for Pole Pendant and Step-Down Transformer Applications.	843654133300	RAQ-94
KT-RHLED-JBOX-PM-W /G2	J-Box Optimized for Pole Pendant and Step-Down Transformer Applications. White.	843654138756	IDT-59
KT-RHLED-WG-1-KIT /G2	Wire guard kit for for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133263	NPV-09
KT-RHLED-WG-2-KIT /G2	Wire guard kit for for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133270	PHU-26
KT-RHLED-SM-1-KIT /G2	Surface Mount Kit for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included.	843654133249	JXD-63
KT-RHLED-SM-1-KIT-W /G2	Surface Mount Kit for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included. White.	843654162850	XLA-73
KT-RHLED-SM-2-KIT /G2	Surface Mount Kit for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included.	843654133256	BLT-11
KT-RHLED-SM-2-KIT-W /G2	Surface Mount Kit for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures. Mounting Hardware Included. White.	843654138763	UJS-44



(Accessories continued on next page)

RH-LED-XX-XXXPS-8CSB-VDIM /G2


ROUND LED HIGH BAY FIXTURE

ACCESSORIES (CONTINUED)

STEP-DOWN TRANSFORMERS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/480†	KTAT-250-480-277 /SF	Fully enclosed, single flex step-down transformer for LED high bay fixtures (250VA or lower)	843654102931	XIM-17

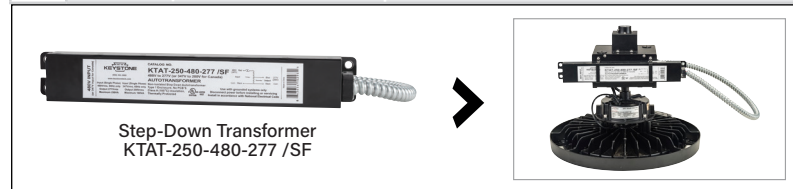

* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).
† Factory installation of step-down transformer units will automatically include any relevant mounting bracket.

LENSES/REFLECTORS

Field-Installable / Field-Use ONLY (purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
		KT-RHLED-AR90-1-KIT /G2	Aluminum Dome Reflector for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133287	ZOV-89
		KT-RHLED-AR90-2-KIT /G2	Aluminum Dome Reflector for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133294	GBN-40
		KT-RHLED-CL90-1-KIT /G2	Clear Polycarbonate Reflector for 100W and 150W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133614	FVZ-16
		KT-RHLED-CL90-2-KIT /G2	Clear Polycarbonate Reflector for 200W and 240W Color & Power Select G2 Round LED High Bay Fixtures; Includes mounting hardware.	843654133621	SFZ-16



* Screw in PIR sensors can not be used with KT-RHLED-CL90-2-KIT /G2

RH-LED-XX-XXXPS-8CSB-VDIM /G2

ROUND LED HIGH BAY FIXTURE

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	Easy Code
RH-LED-11-100PS-8CSB-VDIM /G2	1	843654173245	QHE-16
RH-LED-11-150PS-8CSB-VDIM /G2	1	843654173252	GBC-80
RH-LED-12-200PS-8CSB-VDIM /G2	1	843654173269	VNA-03
RH-LED-13-240PS-8CSB-VDIM /G2	1	843654173276	WTS-82

CATALOG NUMBER BREAKDOWN

RH-LED-XX-XXXPS-8CSB-VDIM /G2

1	2	3	4	5	6	7	8	9	10
1 Round High Bay Fixture	2 LED	3 Nominal Size	4 Wattage	5 Power Select	6 80 CRI	7 Color Select	8 Color Select Designation	9 0-10V Dimming	10 Generation 2
					8 Color Select Designation				
					B 3000K, 4000K, 5000K				
					5 Size / Shape				
					11C 11" Circular				
					12C 12" Circular				
					13C 13" Circular				

ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

RH-LED-XX-XXXPS-8CSB-VDIM /G2 /FC3/L515P/EM/WG/480

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES*

RH-LED-XX-XXXPS-8CSB-VDIM /G2 /FC3/EM/WG

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES*

RH-LED-XX-XXXPS-8CSB-VDIM /G2 /FC3/L515P

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

RH-LED-XX-XXXPS-8CSB-VDIM /G2 /FC3

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

RH-LED-XX-XXXPS-8CSB-VDIM /G2

* When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.

** When installing on Our highbay lights and an IP tight connection is desired, use the xxxx gasket provided with the sensor to ensure proper electrical connection and water tight seal. Hand tighten only.

Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.

Our	FIXTURE
	CATALOG NUMBER
	RH-LED-XX-XXXPS-8CSB-VDIM /G2

SENSORS	
✓ SUFFIX	CATALOG NUMBER
✓ /FC3**	KTSL-FC3-12V-PKO-PIR

CORD SETS	
✓ SUFFIX	CATALOG NUMBER
✓ /L515P	KT-P-L515P

EMERGENCY BACKUP	
✓ SUFFIX	CATALOG NUMBER
✓ /EM	KT-EMRG-LED-40SD-5000-CEN /SF

MOUNTS AND BRACKETS	
✓ SUFFIX	CATALOG NUMBER
✓ /JBOX	KT-RHLED-JBOX-PM /G2

STEP DOWN TRANSFORMER	
✓ SUFFIX	CATALOG NUMBER
✓ /480	KTAT-250-480-277 /SF