


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT

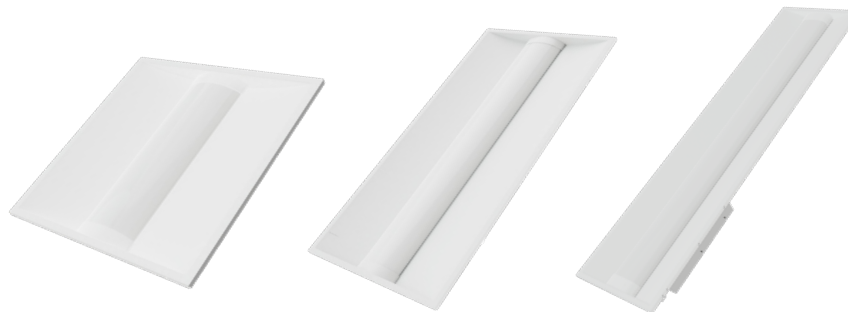

Center Basket Doorframe Retrofit Kit, Wattage Selectable, CCT Selectable,
120-277V Input, Frosted Curved Lens, 0-10V Dimming,
12V Aux + Dim to off, KO for KTSL-FC5

PRODUCT FEATURES

- CCT Selectable between 3500/4000/5000K
- Wattage Selectable (see Performance Specifications for details)
- Powered by 0 -10V dimming LED drivers with 12V Aux
- Architectural grade center basket volumetric design
- LED lifetime: L70 >100,000 hours @ 25°C fixture ambient
- Ambient operating temperature: -20°C/-4°F to 40°C/104°F
- Compatible with emergency backups
- Low optical flicker
- THD: < 20%
- Power factor > 0.95
- IC Rated
- Meets FCC Part 15, Class B



10 YEAR
LIMITED WARRANTY

PERFORMANCE SPECIFICATIONS OVERVIEW


Catalog Number	Size	Input Voltage	Wattage	CCT	Lumen Output	Efficacy	CRI	Lifetime
TRK-LED-14DC-35PS-8CSA /CR /2PK	1x4	120-277V	24/30/35W	3500K 4000K 5000K	3120/3900/4550lm	130 lm/W	> 80	50,000 hrs
TRK-LED-22DC-24PS-8CSA /CR /2PK	2x2		15/18/24W		1950/2340/3120lm			
TRK-LED-22DC-35PS-8CSA /CR /2PK	2x2		24/30/35W		3120/3900/4550lm			
TRK-LED-24DC-30PS-8CSA /CR /2PK	2x4		20/25/30W		2600/3250/3900lm			
TRK-LED-24DC-45PS-8CSA /CR /2PK	2x4		30/38/45W		3900/4940/5850lm			

* Preset to highest lumen output

* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

CONTROLS READY

Features a Control Ready design that allows the installation of multitude of sensor options.
See chart below for possible sensor solutions.



/CR Endcap- Features a Controls ready solution that can be used with or without KTSL-FC5-12V-IM-PIR Sensor



/FC5 Endcap- Features a preinstalled KTSL-FC5-PIR-IM Smartloop Sensor for quick and easy installation on the jobsite



Custom Sensor Solution Endcap - reach out to provider for more information regarding lead times and MOQ may apply

TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT

PRODUCT SPECIFICATIONS DETAILED

Catalog Number	Size	Input Voltage	Wattage	CCT	Lumen Output	Efficacy
TRK-LED-14DC-35PS-8CSA /CR /2PK	1x4	120-277V	24W	3500K	3240	130lm/W
				4000K	3312	134lm/W
				5000K	3336	135lm/W
			30W	3500K	3900	128lm/W
				4000K	4050	132lm/W
				5000K	4080	133lm/W
			35W	3500K	4375	125lm/W
				4000K	4515	129lm/W
				5000K	4550	130lm/W
TRK-LED-22DC-24PS-8CSA /CR /2PK	2x2	120-277V	15W	3500K	2025	130lm/W
				4000K	2070	134lm/W
				5000K	2085	135lm/W
			18W	3500K	2340	128lm/W
				4000K	2430	132lm/W
				5000K	2448	133lm/W
			24W	3500K	3000	125lm/W
				4000K	3096	129lm/W
				5000K	3120	130lm/W
TRK-LED-22DC-35PS-8CSA /CR /2PK	2x2	120-277V	24W	3500K	3240	130lm/W
				4000K	3312	134lm/W
				5000K	3336	135lm/W
			30W	3500K	3900	128lm/W
				4000K	4050	132lm/W
				5000K	4080	133lm/W
			35W	3500K	4375	125lm/W
				4000K	4515	129lm/W
				5000K	4550	130lm/W
TRK-LED-24DC-30PS-8CSA /CR /2PK	2x4	120-277V	20W	3500K	2700	130lm/W
				4000K	2760	134lm/W
				5000K	2780	135lm/W
			25W	3500K	3250	128lm/W
				4000K	3375	132lm/W
				5000K	3400	133lm/W
			30W	3500K	3750	125lm/W
				4000K	3870	129lm/W
				5000K	3900	130lm/W
TRK-LED-24DC-45PS-8CSA /CR /2PK	2x4	120-277V	30W	3500K	4050	130lm/W
				4000K	4140	134lm/W
				5000K	4170	135lm/W
			38W	3500K	4940	128lm/W
				4000K	5130	132lm/W
				5000K	5168	133lm/W
			45W	3500K	5625	125lm/W
				4000K	5805	129lm/W
				5000K	5850	130lm/W

Specifications subject to change. Last revised on 04.30.25


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT


PHOTOMETRIC SPECIFICATIONS

TRK-LED-14DC-35PS-8CSA /CR /2PK

ISOCANDELA PLOT

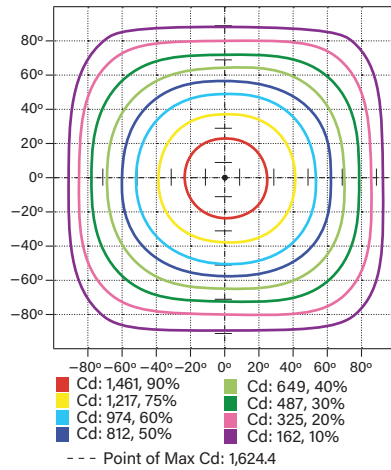


POLAR CANDELA DISTRIBUTION

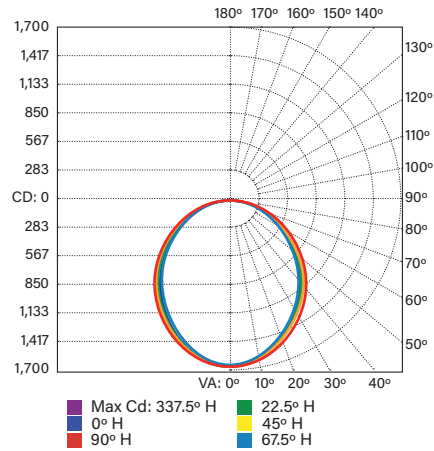

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,234.5	28%
0-40	1,994.6	45.3%
0-60	3,446.7	78.2%
60-90	954.9	21.7%
70-100	422.9	9.6%
90-120	0.8	0%
0-90	4,401.5	99.9%
90-180	3.7	0.1%
0-180	4,405.2	100%

FLUX CHART

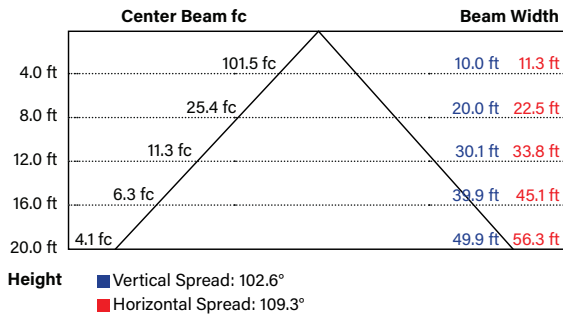


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT


PHOTOMETRIC SPECIFICATIONS (CONTINUED)

TRK-LED-22DC-24PS-8CSA /CR /2PK

ISOCANDELA PLOT

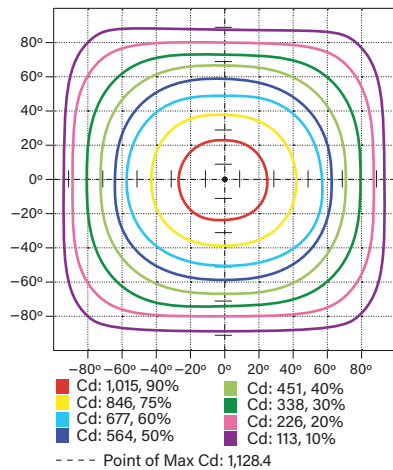


POLAR CANDELA DISTRIBUTION

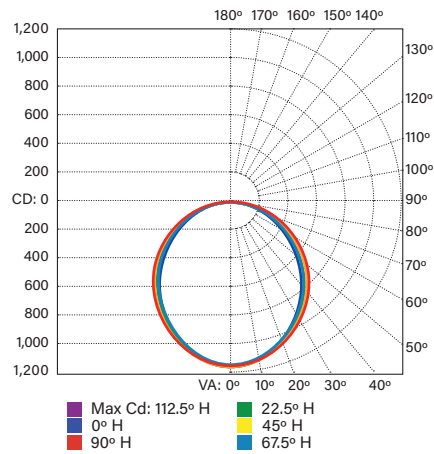

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	864.6	27.3%
0-40	1,406.2	44.4%
0-60	2,462.7	77.7%
60-90	705.8	22.3%
70-100	315.2	9.9%
90-120	0.0	0%
0-90	3,168.5	100%
90-180	0.4	0%
0-180	3,168.8	100%

FLUX CHART

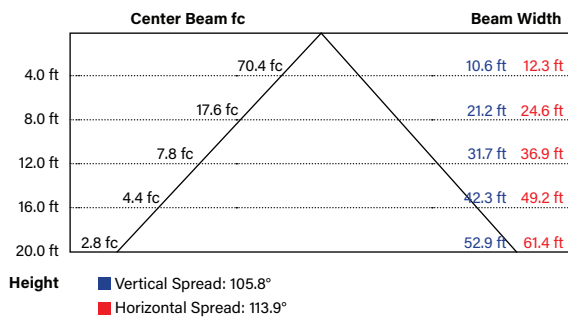


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT


PHOTOMETRIC SPECIFICATIONS (CONTINUED)

TRK-LED-22DC-35PS-8CSA /CR /2PK

ISOCANDELA PLOT

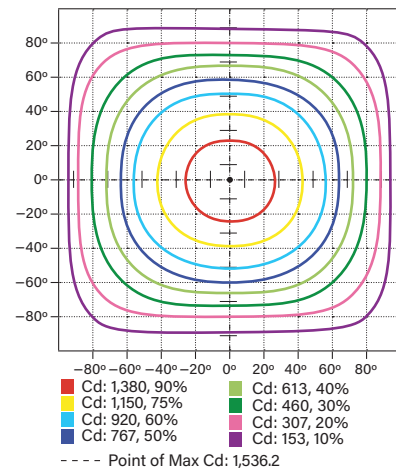


POLAR CANDELA DISTRIBUTION

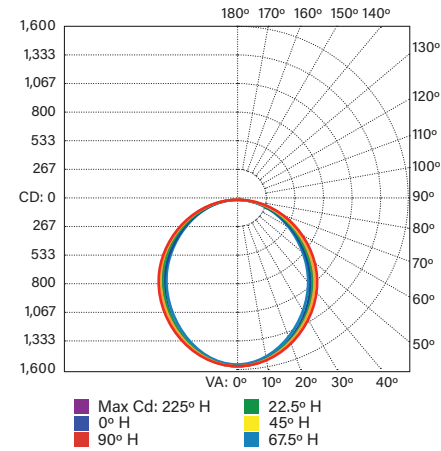

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,177.7	27.3%
0-40	1,915.7	44.3%
0-60	3,354.6	77.6%
60-90	963.4	22.3%
70-100	431.2	10%
90-120	0.4	0%
0-90	4,318.1	99.9%
90-180	2.3	0.1%
0-180	4,320.4	100%

FLUX CHART

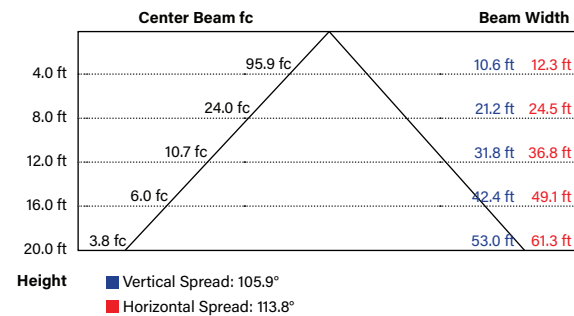


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT


PHOTOMETRIC SPECIFICATIONS (CONTINUED)

TRK-LED-24DC-30PS-8CSA /CR /2PK

ISOCANDELA PLOT

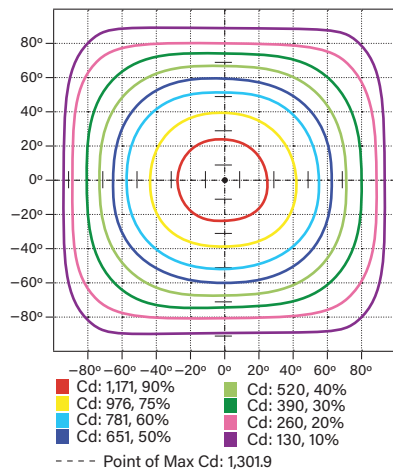


POLAR CANDELA DISTRIBUTION

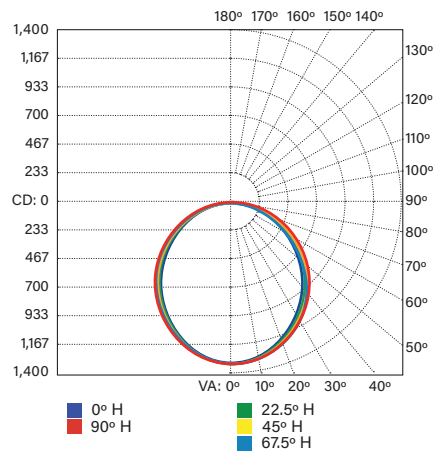

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,000.0	27%
0-40	1,629.4	44%
0-60	2,861.6	77.3%
60-90	838.8	22.7%
70-100	380.4	10.3%
90-120	0.1	0%
0-90	3,700.5	100%
90-180	0.1	0%
0-180	3,700.5	100%

FLUX CHART

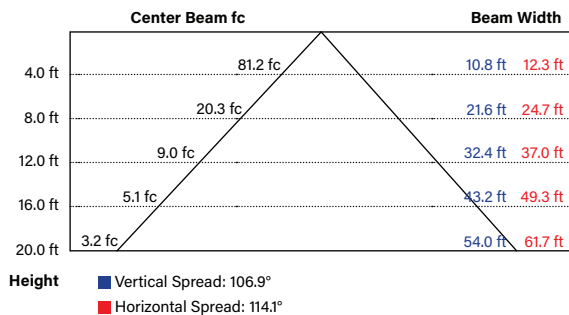


TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT


PHOTOMETRIC SPECIFICATIONS (CONTINUED)

TRK-LED-24DC-45PS-8CSA /CR /2PK

ISOCANDELA PLOT

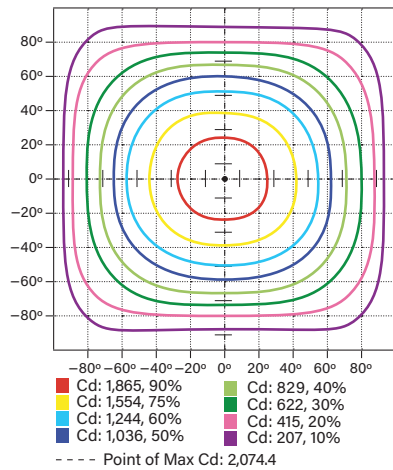


POLAR CANDELA DISTRIBUTION

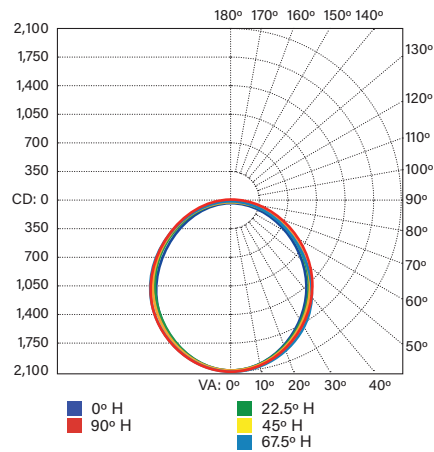


ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,594.8	27%
0-40	2,598.3	44%
0-60	4,564.5	77.3%
60-90	1,338.6	22.7%
70-100	607.9	10.3%
90-120	2.9	0%
0-90	5,903.1	99.9%
90-180	4.2	0.1%
0-180	5,907.3	100%

FLUX CHART

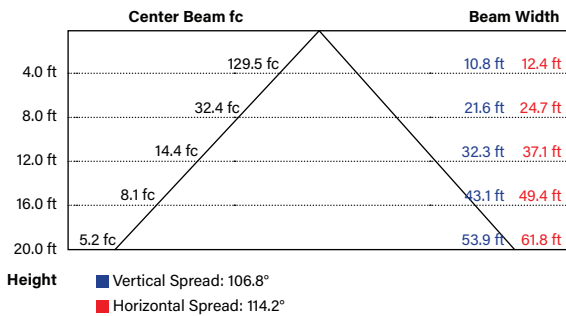


WIRING DIAGRAMS

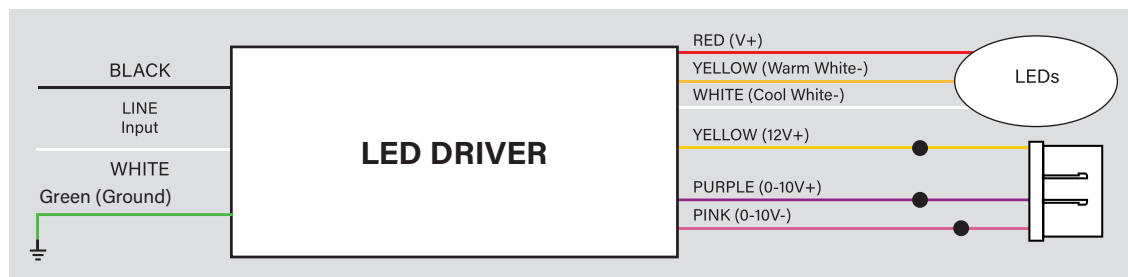

TRK-LED-XXDC-XXPS-8CSA /CR /2PK

CENTER BASKET DOORFRAME RETROFIT KIT

PHYSICAL SPECIFICATIONS

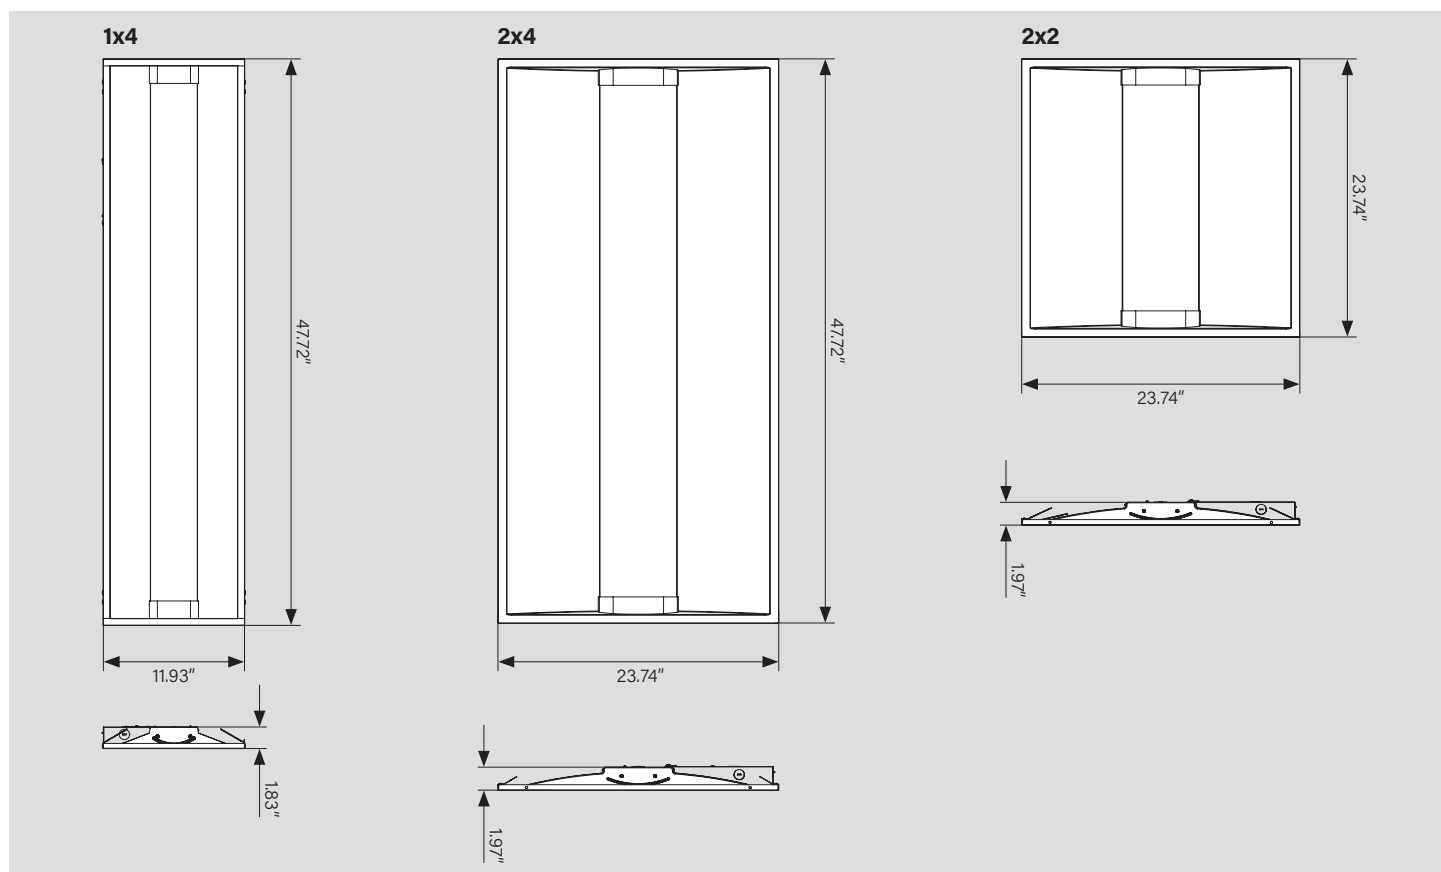

ORDERING INFORMATION

Catalog Number	Description	UPC	EASY CODE	DLC PRODUCT ID
TRK-LED-14DC-35PS-8CSA /CR /2PK	1x4 LED Center Basket Doorframe Retrofit Kit Wattage selectable 35/30/24W CCT selectable 3500/4000/5000K 120-277V Input Frosted Curved Lens 0-10V Dimming 12V Aux + Dim to off KO for KTSL-FC5 White Box Program	843654173337	VCG-12	TBD
TRK-LED-22DC-24PS-8CSA /CR /2PK	2x2 LED Center Basket Doorframe Retrofit Kit Wattage selectable 24/18/15W CCT selectable 3500/4000/5000K 120-277V Input Frosted Curved Lens 0-10V Dimming 12V Aux + Dim to off KO for KTSL-FC5 White Box Program	843654173344	SEX-68	TBD
TRK-LED-22DC-35PS-8CSA /CR /2PK	2x2 LED Center Basket Doorframe Retrofit Kit Wattage selectable 35/30/24W CCT selectable 3500/4000/5000K 120-277V Input Frosted Curved Lens 0-10V Dimming 12V Aux + Dim to off KO for KTSL-FC5 White Box Program	843654173351	AZX-76	TBD
TRK-LED-24DC-30PS-8CSA /CR /2PK	2x4 LED Center Basket Doorframe Retrofit Kit Wattage selectable 30/25/20W CCT selectable 3500/4000/5000K 120-277V Input Frosted Curved Lens 0-10V Dimming 12V Aux + Dim to off KO for KTSL-FC5 White Box Program	843654173368	UOS-73	TBD
TRK-LED-24DC-45PS-8CSA /CR /2PK	2x4 LED Center Basket Doorframe Retrofit Kit Wattage selectable 45/38/30W CCT selectable 3500/4000/5000K 120-277V Input Frosted Curved Lens 0-10V Dimming 12V Aux + Dim to off KO for KTSL-FC5 White Box Program	843654173375	CMH-94	TBD