

WALL PACK

SERIES: WPL110/WPL120/WPL130/
WPL140/WPL150

PRODUCT SPECIFICATIONS


SYSTEM WATTAGE	15W,25W,40W,70W,100W
LUMENS	1800LM,3000LM,4800LM, 8400LM,12000LM
EFFICACY	UP TO 125LPW
INPUT VOLTAGE	120-277V
CCT	3000k, 4000K, 5000K
CRI	> 70
WEIGHT	3lbs,4.5lbs,5.68lbs,8.66lbs,10.3lbs
AMBIENT TEMP.	-30 - 40°C
LED Performance	L70>50000h
STANDARD WARRANTY	5 Years



PRODUCT FEATURES

- Industrial grade Impact & weather resistant fixture with die cast aluminum housings and clear polycarbonate T2 & T4 optic lenses
- 0-10V dimming @ DLC 5.1 Standard Photocell and photocell cover are optional
- Lumileds 5050 chip and high quality driver @ 5 year warranty
- Easy hook hands free wall mount installation.
Dark sky compliant mounting






PRODUCT DIMENSIONS

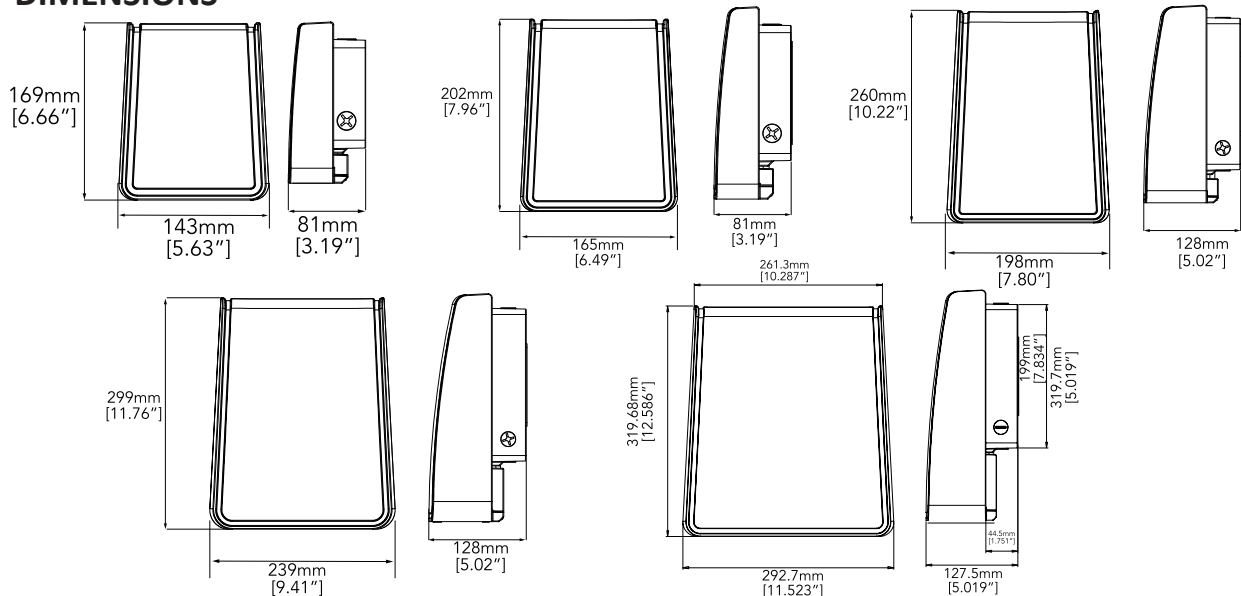

CATALOG NUMBER Example: (WPL110-15W-40K-V8-N-PC-T2-S1-BZ)

MODEL	WATTAGE	CCT	VOLTAGE	DIMMING OPTION	OPTIONS	DISTRIBUTION	SURGE PROTECTOR	HOUSING FINISH
WPL110	15W	30K = 3000K 40K = 4000K 50K = 5000K	V8 = 120-277V	D = Dimming N = Non-Dimming	PC = Photocell NA = None	T2 =Type II T4 =Type IV	NA = None S1 = Surge protector	BZ = Bronze SL = Silver WH = White GY = GRAY BK = Black
WPL120	25W							
WPL130	40W							
WPL140	70W							
WPL150	100W							

PHOTOMETRY

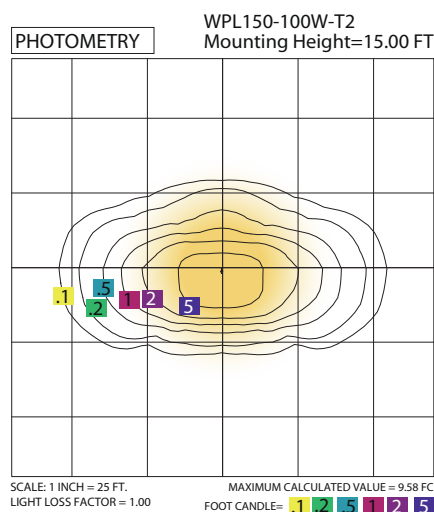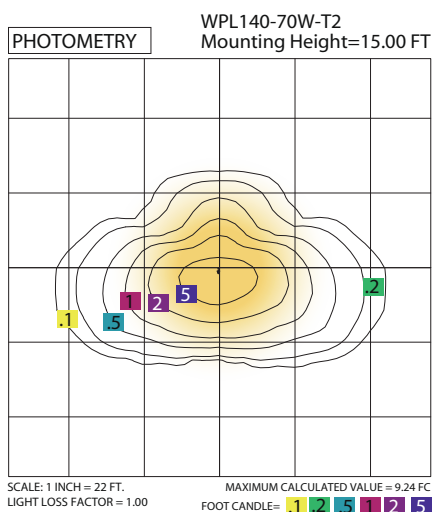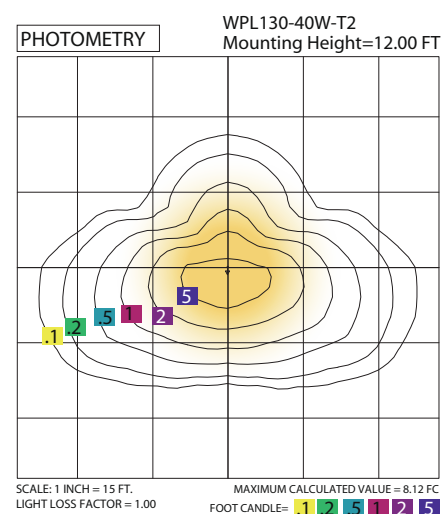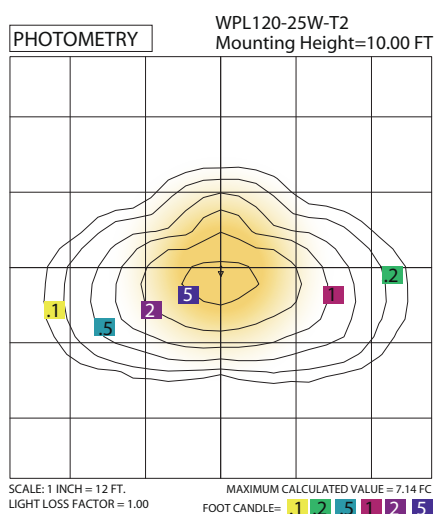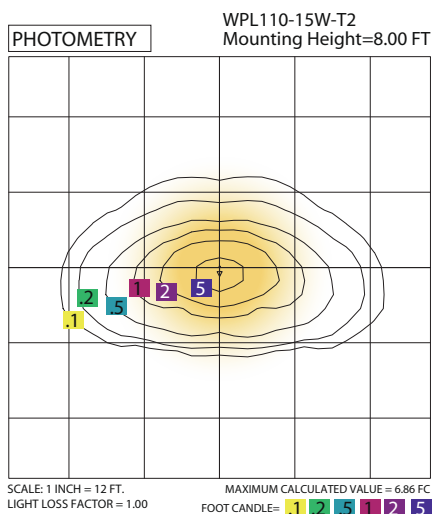

ADDITIONAL PHOTOMETRICS AVAILABLE ONLINE