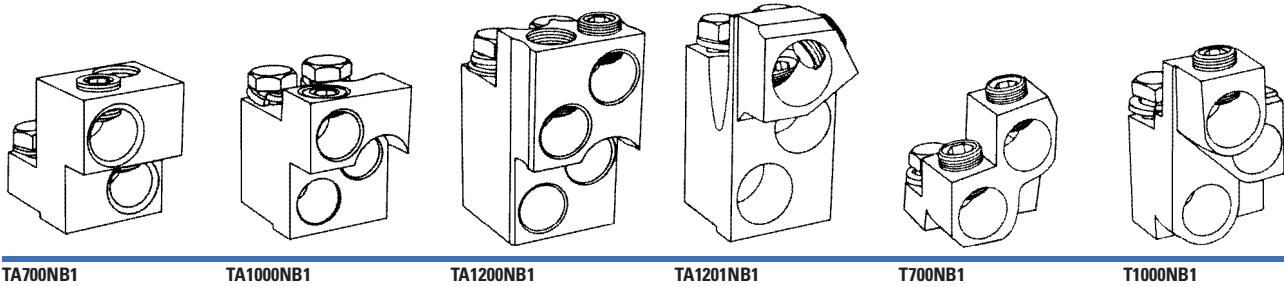


## Accessories Selection Guide and Ordering Information

**Line and Load Terminals—Ordering Information**

N-Frame circuit breakers use Cu/Al terminals as standard. When optional copper or Cu/Al terminals are required, order by catalog number. Specify if factory installation is required.

2

**Line and Load Terminals**

| Maximum Breaker Amperes                                  | Terminal Body Material | Wire Type | AWG Wire Range/<br>No. Conductors | Metric Wire Range mm <sup>2</sup> | Catalog Number                |
|----------------------------------------------------------|------------------------|-----------|-----------------------------------|-----------------------------------|-------------------------------|
| <b>Standard Cu/Al Pressure Terminals</b>                 |                        |           |                                   |                                   |                               |
| 700                                                      | Aluminum               | Cu/Al     | 1–500 kcmil (2)                   | 50–240                            | <b>TA700NB1</b>               |
| 1000                                                     | Aluminum               | Cu/Al     | 3/0–400 kcmil (3)                 | 95–185                            | <b>TA1000NB1</b> <sup>1</sup> |
| 1200                                                     | Aluminum               | Cu/Al     | 4/0–500 kcmil (4)                 | 120–240                           | <b>TA1200NB1</b> <sup>1</sup> |
| 1200                                                     | Aluminum               | Cu/Al     | 500–750 kcmil (3)                 | 300–400                           | <b>TA1201NB1</b> <sup>2</sup> |
| <b>Optional Copper and Cu/Al Pressure Type Terminals</b> |                        |           |                                   |                                   |                               |
| 700                                                      | Copper                 | Cu        | 2/0–500 kcmil (2)                 | 70–240                            | <b>T700NB1</b>                |
| 1000                                                     | Copper                 | Cu        | 3/0–500 kcmil (3)                 | 95–240                            | <b>T1000NB1</b>               |
| 1200                                                     | Copper                 | Cu        | 3/0–400 kcmil (4)                 | 95–185                            | <b>T1200NB3</b>               |

**Notes**

<sup>1</sup> Terminal rating is AL9CU.

<sup>2</sup> Terminal rating is AL7CU.