

RIGID AND IMC FITTINGS

POLYPROPYLENE - INSULATED BUSHINGS

Applications

- For use on threaded Rigid/IMC conduit
- Bushings provide a smoothly rounded surface at the entrance of raceways

Product Feature

- Insulating bushings are made of high impact polypropylene that is temperature rated at 105° C


Compliances

-  – Standard 514B
-  – C22.2 #18



INSULATING BUSHINGS
POLYPROPYLENE

RACO COMMERCIAL
FITTINGS

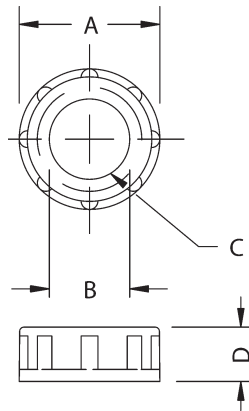

A = O.D.
B = I.D.
C = Thread size
D = Thickness

ORDERING INFORMATION - DIMENSIONS

INSULATING BUSHINGS - POLYPROPYLENE

CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
1402	1/2"	100	400	—
1403	3/4"	100	400	—
1404	1"	50	200	—
1405	1-1/4"	—	25	—
1406	1-1/2"	—	25	—
1408	2"	—	25	—
1410	2-1/2"	—	10	—
1412	3"	—	10	—
1414	3-1/2"	—	5	—
1416	4"	—	5	—
1420	5"	—	5	—
1424	6"	—	5	—

DIMENSIONS

CATALOG NUMBER	A	B	C THD. SPEC.	D
1402	1-1/16"	19/32"	1/2"-14 NPT	23/64"
1403	1-19/64"	25/32"	3/4"-14 NPT	13/32"
1404	1-5/8"	1"	1"-11-1/2 NPT	31/64"
1405	1-61/64"	1-9/64"	1-1/4"-11-1/2 NPT	31/64"
1406	2-3/16"	1-33/64"	1-1/2"-11-1/2 NPT	31/64"
1408	2-41/64"	1-61/64"	2"-11-1/2 NPT	35/64"
1410	3-1/4"	2-21/64"	2-1/2"- 8 NPT	5/8"
1412	3-29/32"	2-29/32"	3"- 8 NPT	11/16"
1414	4-13/32"	3-11/32"	3-1/2"- 8 NPT	11/16"
1416	4-15/16"	3-53/64"	4"- 8 NPT	11/16"
1420	5-63/64"	4-15/16"	5"- 8 NPT	49/64"
1424	7-1/16"	5-15/16"	6"- 8 NPT	49/64"