




BELL • CHALMIT • HAWKE INTERNATIONAL • KILLARK • RACO



[Home](#) | [Products](#) | [Company](#) | [Support](#) | [Contact](#)

April 21, 2008

**Products**  
 > [Index](#)  
 > [Featured Products](#)  
 > [Cross Reference](#)  
 > [UPC Search](#)

Product Datasheet

## 3403 -- Straight Liquidtight Connector 3/4" Trade Size



| Product Specifications         |                                              |
|--------------------------------|----------------------------------------------|
| <b>Family</b>                  | Liquidtight Conduit and Cord Connectors      |
| <b>Fittings Classification</b> | Steel / Malleable Iron - Straight Connectors |
| <b>Sub Class</b>               | Uninsulated                                  |
| <b>Trade Size</b>              | 3/4"                                         |
| <b>Standard Packaging</b>      | Carton                                       |
| <b>Ship Carton Length</b>      | 10.875                                       |
| <b>Ship Carton Width</b>       | 8.625                                        |
| <b>Ship Carton Height</b>      | 9.5                                          |
| <b>WT. PER HU.</b>             | 20.4                                         |
| <b>Dimension A</b>             | 1-13/32"                                     |
| <b>Dimension B</b>             | 9/16"                                        |
| <b>Thread Spec. B</b>          | 3/4-14 NPT                                   |
| <b>Dimension C</b>             | 1-31/64"                                     |
| <b>Unit Carton Quantity</b>    | 25                                           |
| <b>Ship Carton Quantity</b>    | 100                                          |
| <b>UPC Number</b>              | 05016903403                                  |

**Applications**


- For use in outdoor or indoor locations on flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Use to positively bond the conduit to a box or enclosure
- RACO® liquidtight connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

#### Product Features

- Patented split gland-ring is designed to slip onto the conduit quickly and to grip the jacket of the conduit, speeding installation, assuring a perfect seal, and preventing pullouts
- All components are reusable -- RACO® liquidtight connectors may be easily disassembled and reused after years of service
- Sealing washer (included) provides a liquidtight seal when terminating the connector in a threadless opening
- Heavy duty locknut included with every RACO® liquidtight connector assures continuity of ground
- All metallic components are zinc electro plated for added corrosion protection
- Bodies - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron ; •Nuts - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron

#### Compliances

UL CSA

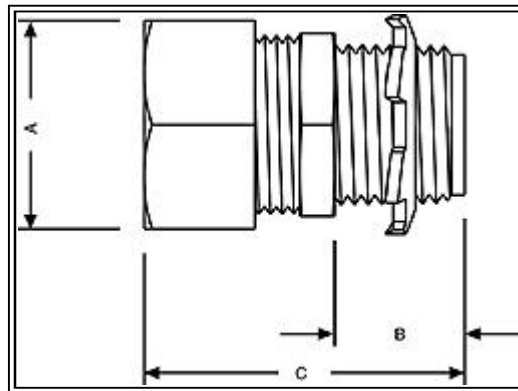

[Login](#) | [Privacy](#) | [Site Map](#)

© 2003 RACO - a hubbell company. All right reserved.