




BELL • CHALMIT • HAWKE INTERNATIONAL • KILLARK • RACO

Search RACO

GO

[Home](#) | [Products](#) | [Company](#) | [Support](#) | [Contact](#)

April 21, 2008

Products
 > [Index](#)
 > [Featured Products](#)
 > [Cross Reference](#)
 > [UPC Search](#)

Product Datasheet

Catalog Home
Home Page
Search

3404 -- Straight Liquidtight Connector 1" Trade Size



Product Specifications	
Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Steel / Malleable Iron - Straight Connectors
Sub Class	Uninsulated
Trade Size	1"
Standard Packaging	Carton
Ship Carton Length	6.25
Ship Carton Width	4.5
Ship Carton Height	4.25
WT. PER HU.	36
Dimension A	1-45/64"
Dimension B	19/32"
Thread Spec. B	1-11-1/2 NPT
Dimension C	1-51/64"
Unit Carton Quantity	10
Ship Carton Quantity	10
UPC Number	05016903404

Applications


- For use in outdoor or indoor locations on flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Use to positively bond the conduit to a box or enclosure
- RACO® liquidtight connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Patented split gland-ring is designed to slip onto the conduit quickly and to grip the jacket of the conduit, speeding installation, assuring a perfect seal, and preventing pullouts
- All components are reusable -- RACO® liquidtight connectors may be easily disassembled and reused after years of service
- Sealing washer (included) provides a liquidtight seal when terminating the connector in a threadless opening
- Heavy duty locknut included with every RACO® liquidtight connector assures continuity of ground
- All metallic components are zinc electro plated for added corrosion protection
- Bodies - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron ; •Nuts - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron

Compliances

UL CSA

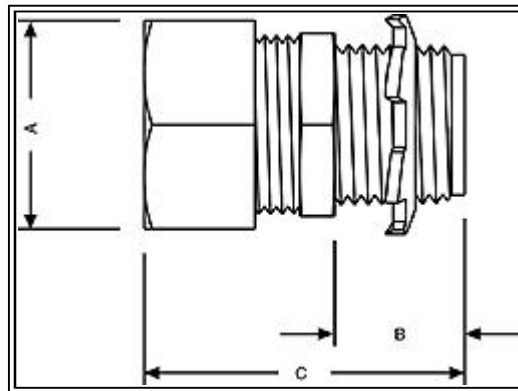

[Login](#) | [Privacy](#) | [Site Map](#)

© 2003 RACO - a hubbell company. All right reserved.