

2' & 4' Frosted LED Wrap


CCT Tunable via ENVISIONLS

Wraps




2FT.

4FT.



Devices



CCT-Select / Dimming



Wall Switch
S-WS-DIM-TUN-UNV-BT

Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Frosted Lens
- Average life (L70) of 50,000 hours
- CCT Tunable: 30-65k

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Residential, Commercial and Industrial

Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 1/2" Knockout on both ends of the fixture
- ENVISIONLS + Tunable Control:
 - Control through Bluetooth via EnVisionLS app
 - Group fixtures together: dimming, tunable cct, grouping & more!
 - Tunable models are not currently compatible with sensors

Driver Options:

- UNV: 120-277V
- Dimmable via EnvisionLS APP or S-WS-DIM-TUN-UNV-BT
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installation:

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available

Certifications:

- ETL Listed for USA and CA
- DLC Standard Listed
 - 2FT-3P24: S-53C8H8 / S-TCFCZ0
 - 4FT-3P48: S-JNZMD2 / S-PY0XJQ
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Size/Power	CCT	Voltage	Emergency	Finish ¹
LED-WRP-FR	- TUN - UNV -				
	2FT-24W 2,760LM	30-65K Tunable	120-277V	(Blank) No Emergency EMB Emergency Backup	(Blank) White BL ² Black GRY ² Gray BRZ ² Bronze CS ² Custom Color
	4FT-48W 5,520LM				

1. Standard quick ship finish is white. Other colors are custom finishes.

Optional Accessories (Order Separately)

Accessories


- SK-10FT-Y-LC-PD**
10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
- SK-20FT-Y-LC-PD**
20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
- CK-6FT-V**
6' Chain Hanging Kit

Wall Dimmer & Tuning


- S-WS-DIM-TUN-UNV-BT**
Dimmer + Tuning Slider

Specs and model numbers are subject to change with or without notice.

FEATURES

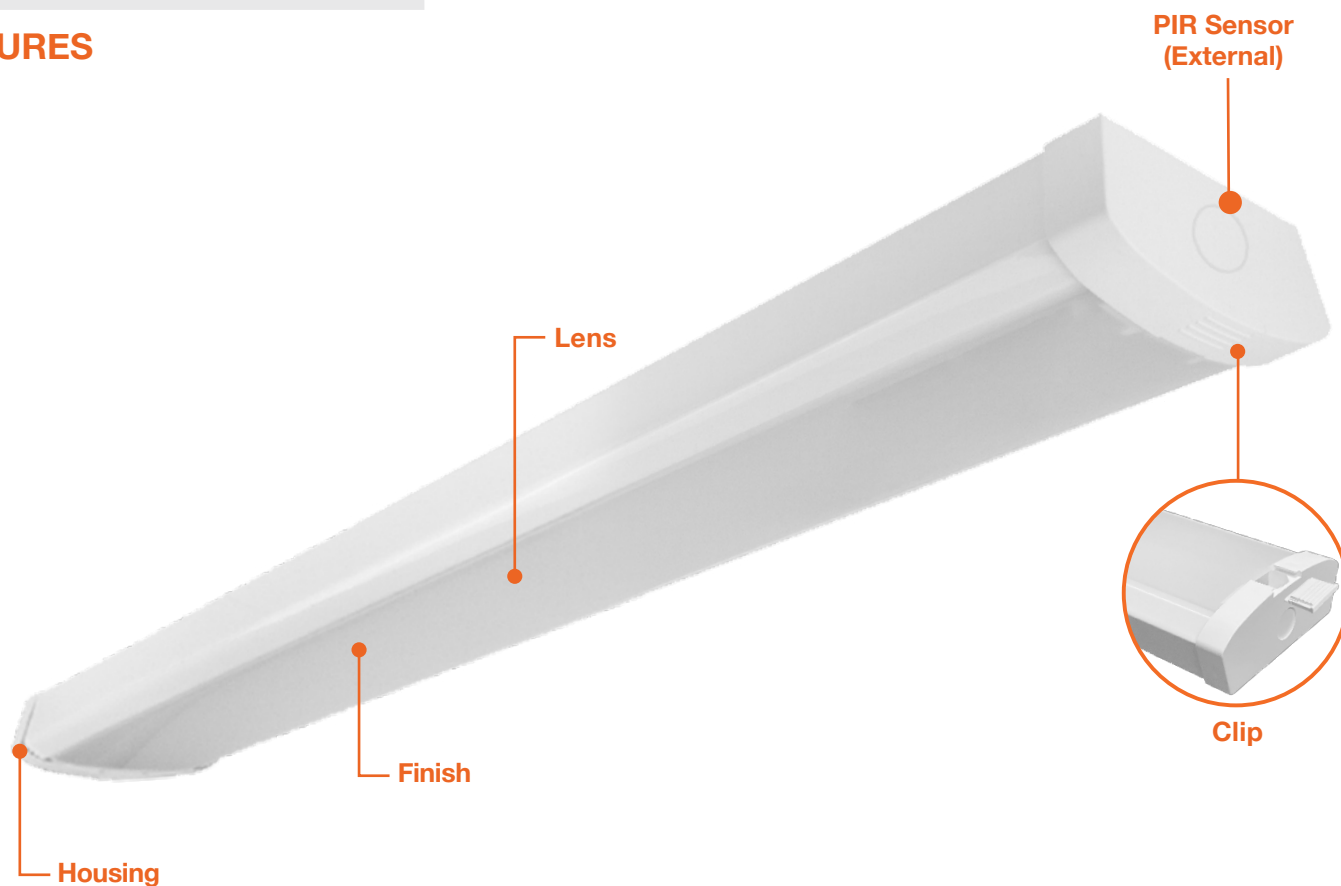


DIMENSIONS

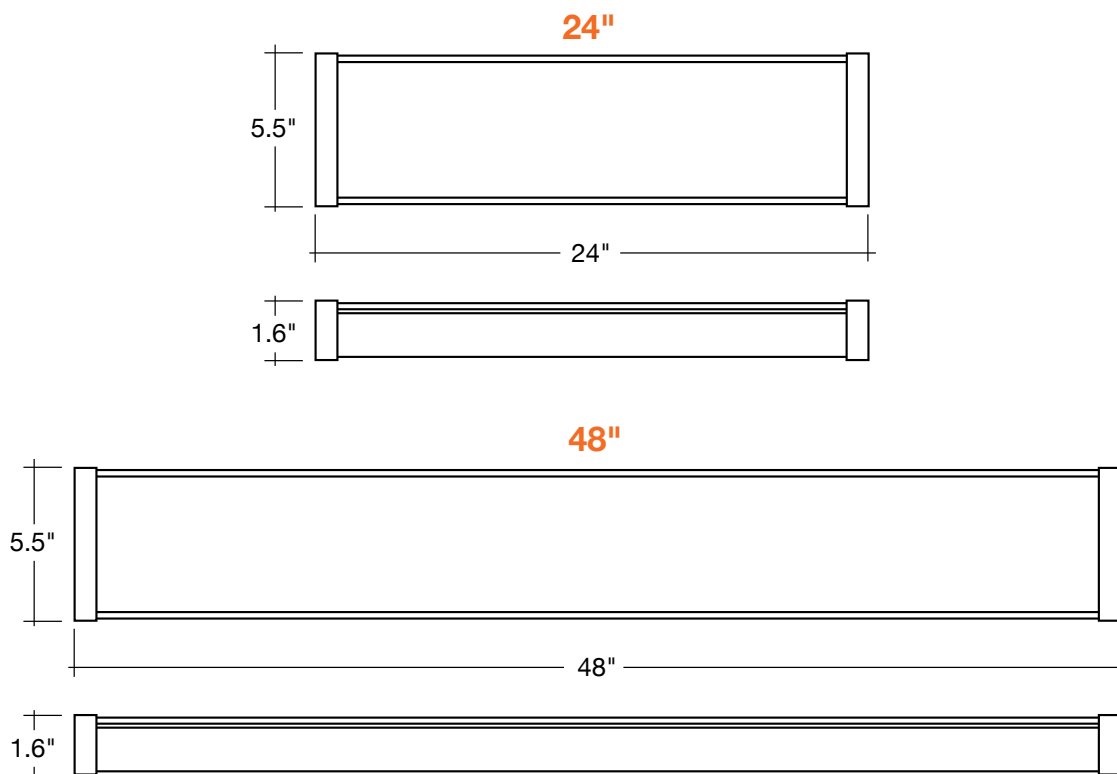

ACCESSORIES



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD



CK-6FT-V



S-WS-DIM-TUN-UNV-BT

WRAP FIXTURE

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-FR-2FT-24W-TUN-UNV	120-277V	24	2760	30-65K Tunable	>80
LED-WRP-FR-4FT-48W-TUN-UNV	120-277V	48	5520	30-65K Tunable	>80

SUSPENSION KIT

Model	Description
SK-10FT-Y-LC-PD	Suspension Kit: 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

WALL DIMMER

Model	Description
S-WS-DIM-TUN-UNV-BT	Dimmer + Tuning Slider