

GLIDE-Line: LED Troffer


CCT Tunable via ENVISIONLS




2x2



2x4



Devices



CCT-Select / Dimming



Wall Switch
S-WS-DIM-TUN-UNV-BT

Project: _____ Part #: _____
Type: _____

Troffers



Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS frosted, non-yellowing, & shatter resistant
- Average life (L70) of 50,000 hours
- CCT Tunable: 30-65k

Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

Product Information:

- Sensor Ready (SR): ready for field install with available EnVision controls
- Metal housing finished with corrosion free power coat
- Even light distribution with frosted diffuser with low glare
- Lightweight for easier installation
- ENVISIONLS + Tunable Control:
 - Control through Bluetooth via EnVisionLS app
 - Group fixtures together: dimming, tunable cct, grouping & more!
 - Tunable models are not currently compatible with sensors

Driver Options:

- UNV: 120-277V
- Dimmable via EnvisionLS APP or S-WS-DIM-TUN-UNV-BT
- Standard EMB used: 8W EMB (LED-EMB-8W-HV-0-10V-2P)
 - Higher wattage emb (up to 25W) available by request.
- Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installation:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 10' & 20' suspension kits available
- Optional surface mount & drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

Certifications:

- ETL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

Series	Emergency	Whip
LED-CBT-GL-2X2-35W-5CCT-SR	(Blank)	(Blank)
4000lm	No Emergency	No Whip
LED-CBT-GL-2X4-50W-5CCT-SR	Backup	-6FLX
5,750lm	Emergency	6' Flex
	Backup	

1. Standard quick ship finish is white. Other colors are custom finishes.

2. HV: High voltage is made to order.


Optional Accessories (Order Separately)

Suspension Kits	Surface Mount ¹	Drywall Kits	Wall Dimmer & Tuning
	2X4-SM-3"	LED-PNL-2X4-F	
SK-10FT-Y-LC-CB	2X2-SM-3"	LED-PNL-2X2-FLNG	S-WS-DIM-TUN-UNV-BT
10' Suspension Kit	3" Height	Drywall Kit	Dimmer + Tuning Slider
SK-20FT-Y-LC-CB	2X4-SM-3"	LED-PNL-2X4-FLNG	
20' Suspension Kit	3" Height	Drywall Kit	
CK-6FT-V			
6' Chain			
Hanging Kit			


1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.


FEATURES

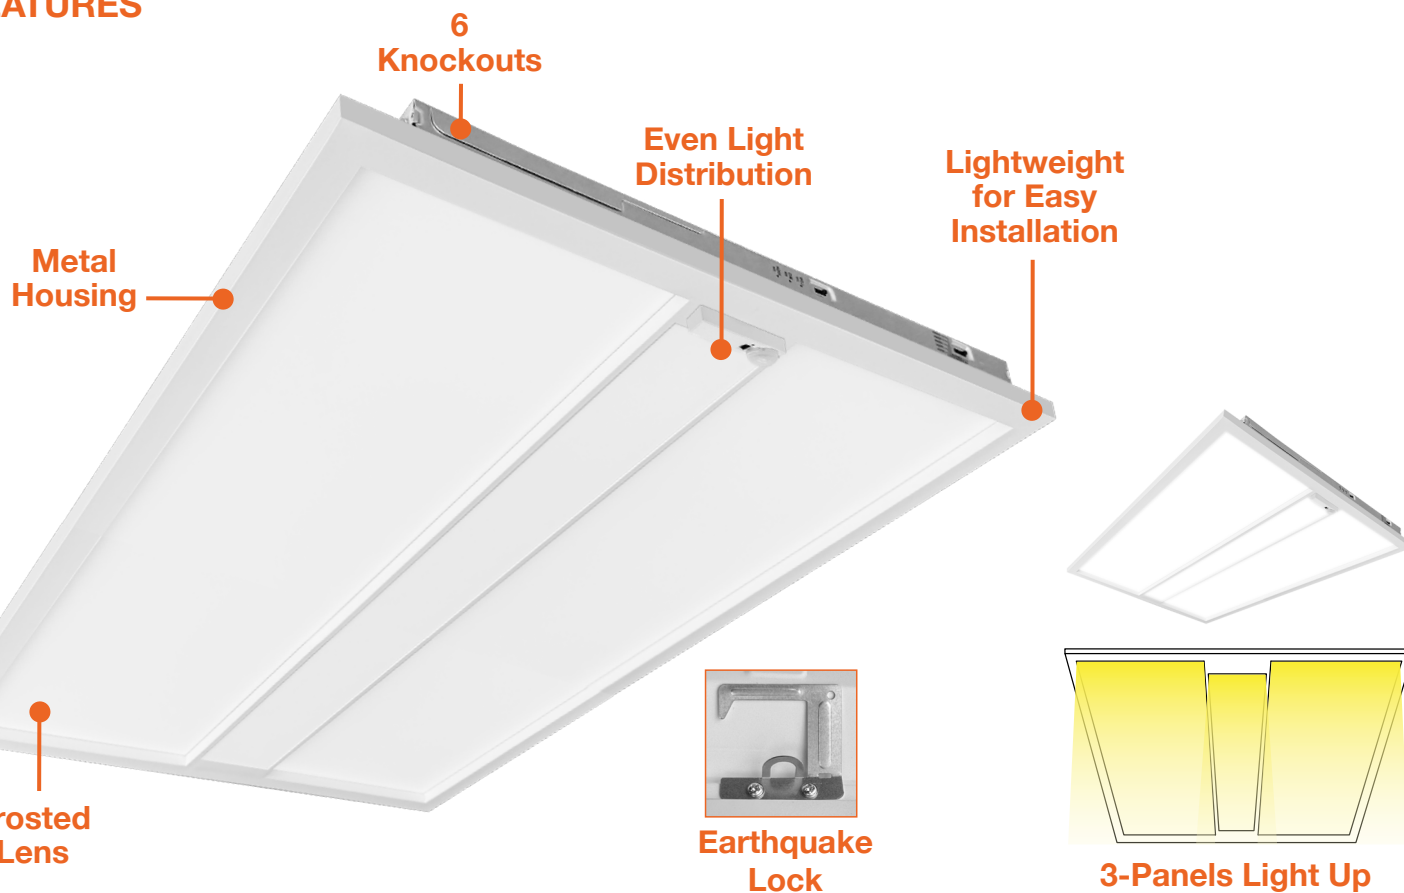

DIMENSIONS

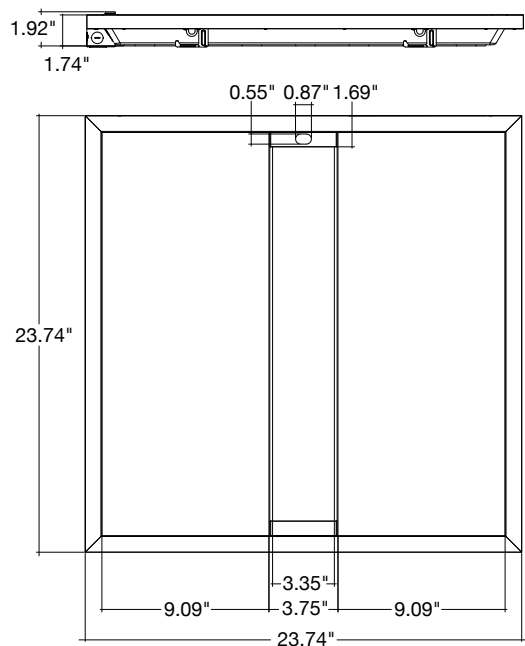

2x2

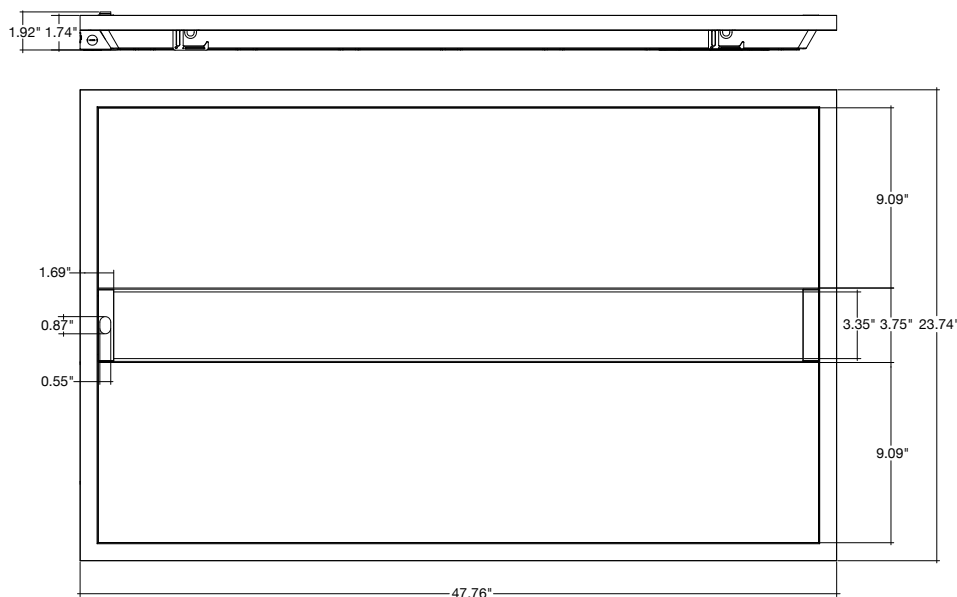


2x4

ACCESSORIES



SK-10FT-Y-LC-CB
SK-20FT-Y-LC-CB



CK-6FT-V



S-WS-DIM-TUN-UNV-BT

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-CBT-GL-2X2-35W-5CCT-SR	120-277V	35w	4,000	30-65K Tunable	>80
LED-CBT-GL-2X4-50W-5CCT-SR	120-277V	50w	5,750	30-65K Tunable	>90

SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Chain Hanging Kit
CK-6FT-V	6' Chain Hanging Kit


SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers



DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for all 2X4 Fixtures

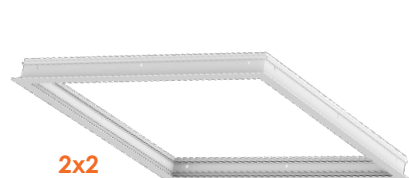

WALL DIMMER

Model	Description
S-WS-DIM-TUN-UNV-BT	Dimmer + Tuning Slider