

Full Cut Off Wall Packs: Full-FC-Line

3-CCT + 3-Power + Selectable Photocell



WATT	LUMENS
60	8,100
80	10,800
100	13,500

Detail Specifications:

- Finish: Bronze or Black, Custom finishes available
- IP Rating: Wet Location
- Beam Angle: 90°
- BUG:
 - 3P100W: B3-U3-G3
- Traditional + Full Cut Off Mode
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens:
 - Front: PC Ribbed Lens
 - Bottom: PC w/ Optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Slim in size and easy to install
- Photocell included with an ON/OFF switch
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-WPF-FC-21-3P100-TRI -

Finish¹

- [] -

BZ

Bronze

(Standard)

BL

Black

(Standard)

WH¹

White

GRY¹

Gray

CS¹

Custom

Color

Voltage

- [] -

UNV

120-277V

HV

277-480V

Photocell

- [] -

PC

Photocell is included.

Sensor²

- [] -

(blank)

No Sensor

BMS

Bi-Level

Motion +

Daylight Sen-

sor (S-BMS-

EXT-1)

BMSBT

Bi-Level

Motion +

Daylight

Sensor -Blue-

tooth Control-

(S-BMS-

EXT-1-BT)

Emergency

- [] -

(blank)

No Emergency

EMB

Emergency

Backup

Surge Protector

- [] -

(blank)

6KV Built in

20KV

20KV Surge

Protector

Optional Accessories (Order Separately)

Remote for
Sensors

[]

S-LINE-R

S-Line

Remote

Shield

[]

WPF-SL-SHIELD

Shield


1. Standard quickship is bronze. Other colors are custom finishes

2. Sensors require remote for programming

FEATURES



DIMENSIONS

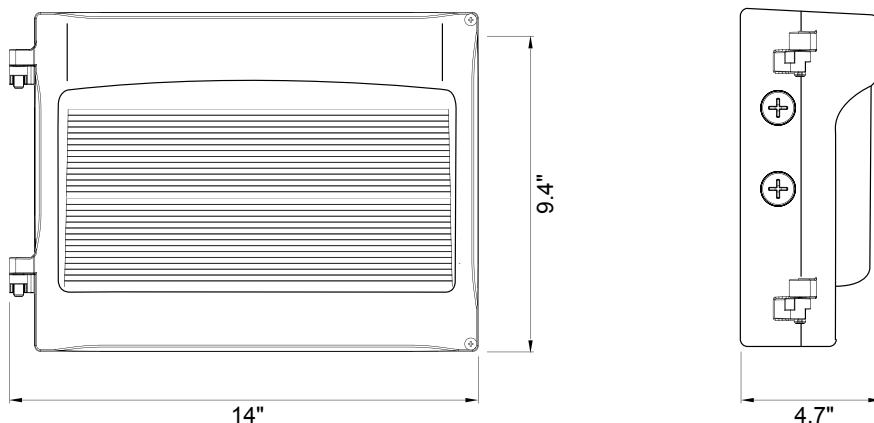

Full Cut Off Wall Packs: Full-FC-Line


3-CCT + 3-Power + Selectable Photocell



S-LINE-R



S-BMS-EXT-1
S-BMS-EXT-1-BT



WPF-SL-SHIELD

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPF-FC-21-3P100-TRI-BZ-PC	120-277V	100/80/60W	13,500/10,800/8,100	30/40/50k	>80
LED-WPF-FC-21-3P100-TRI-BL-PC	120-277V	100/80/60W	13,500/10,800/8,100	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
S-LINE-R	Remote for S-LINE Series Sensors

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with LED WALLPACKS. 12V 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting, Ideal for use with Wallpacks. 12V 12V Aux REQD. (Remote Required)	12V	<1w

SHIELD

Accessory Model	Description
WPF-SL-SHIELD	Cout off shield

Specs and model numbers are subject to change with or without notice.