


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 78.81 lm/W
MODEL		I _{max} (cd)	1282	S/MH (C0/180)		0.60
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)		0.60
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	598.41	η UP, DN (C0-180)		0.0, 50.7
NOMINAL FLUX (lm)	598.405	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 49.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

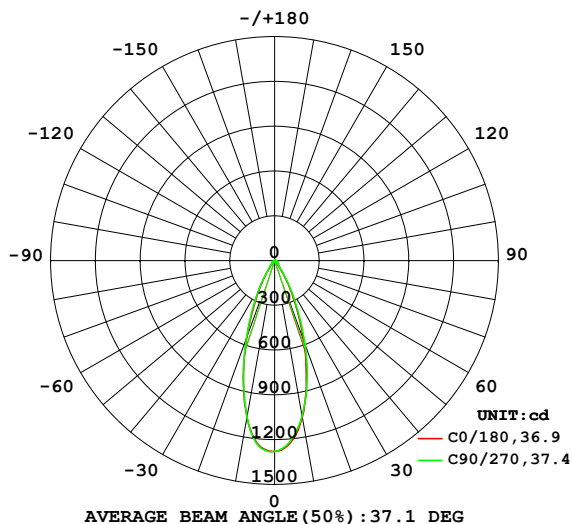

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

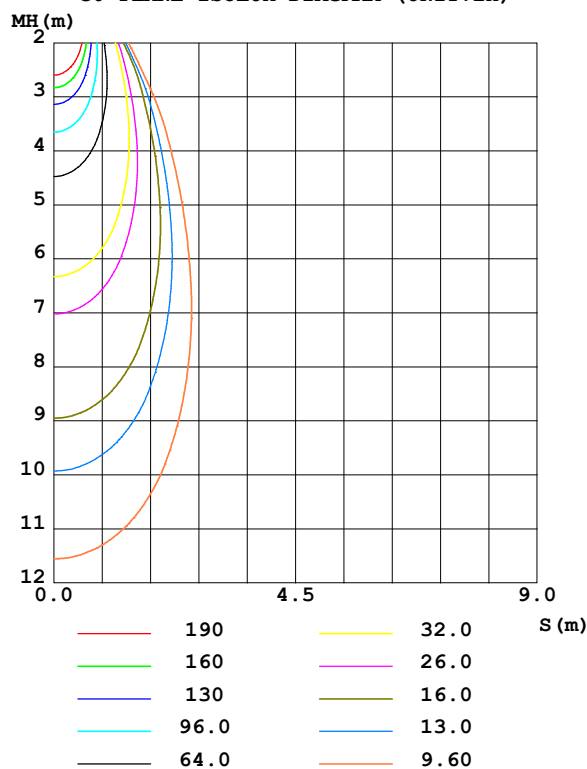

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1068	1071	1060	1058	1069	1058	1067	1093	0- 10	112.2	112.2	18.8,18.8
20	573.7	580.3	597.1	559.9	547.9	579.0	555.0	562.7	10- 20	226.0	338.3	56.5,56.5
30	191.3	191.0	204.6	188.9	178.6	187.1	186.3	185.0	20- 30	160.3	498.6	83.3,83.3
40	33.31	37.00	41.10	38.91	35.52	37.70	37.29	35.56	30- 40	53.08	551.6	92.2,92.2
50	20.50	20.63	20.72	20.67	20.65	20.54	20.28	20.45	40- 50	20.78	572.4	95.7,95.7
60	11.14	11.35	11.40	11.23	11.25	11.19	11.04	11.12	50- 60	13.92	586.3	98,98
70	5.926	5.732	5.007	5.552	5.850	5.497	4.893	5.618	60- 70	8.179	594.5	99.4,99.4
80	2.206	1.435	0.7557	1.309	2.081	1.271	0.7188	1.343	70- 80	3.487	598.0	99.9,99.9
90	0.0040	0.0040	0	0.0007	0.0097	0.0097	0.0083	0.0104	80- 90	0.3898	598.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

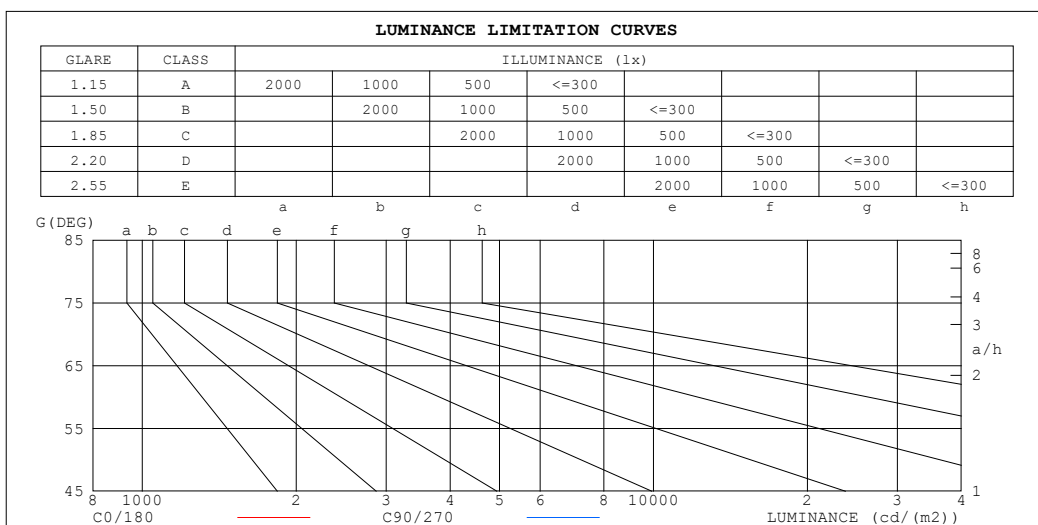


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94														
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89														
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84														
4.0	.93	.88	.84	.92	.87	.83	.90	.86	.82	.88	.84	.81	.86	.83	.81	.79														
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75														
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71														
7.0	.80	.74	.70	.79	.74	.70	.78	.73	.70	.77	.73	.70	.75	.72	.69	.68														
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65														
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62														
10.0	.70	.65	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59														

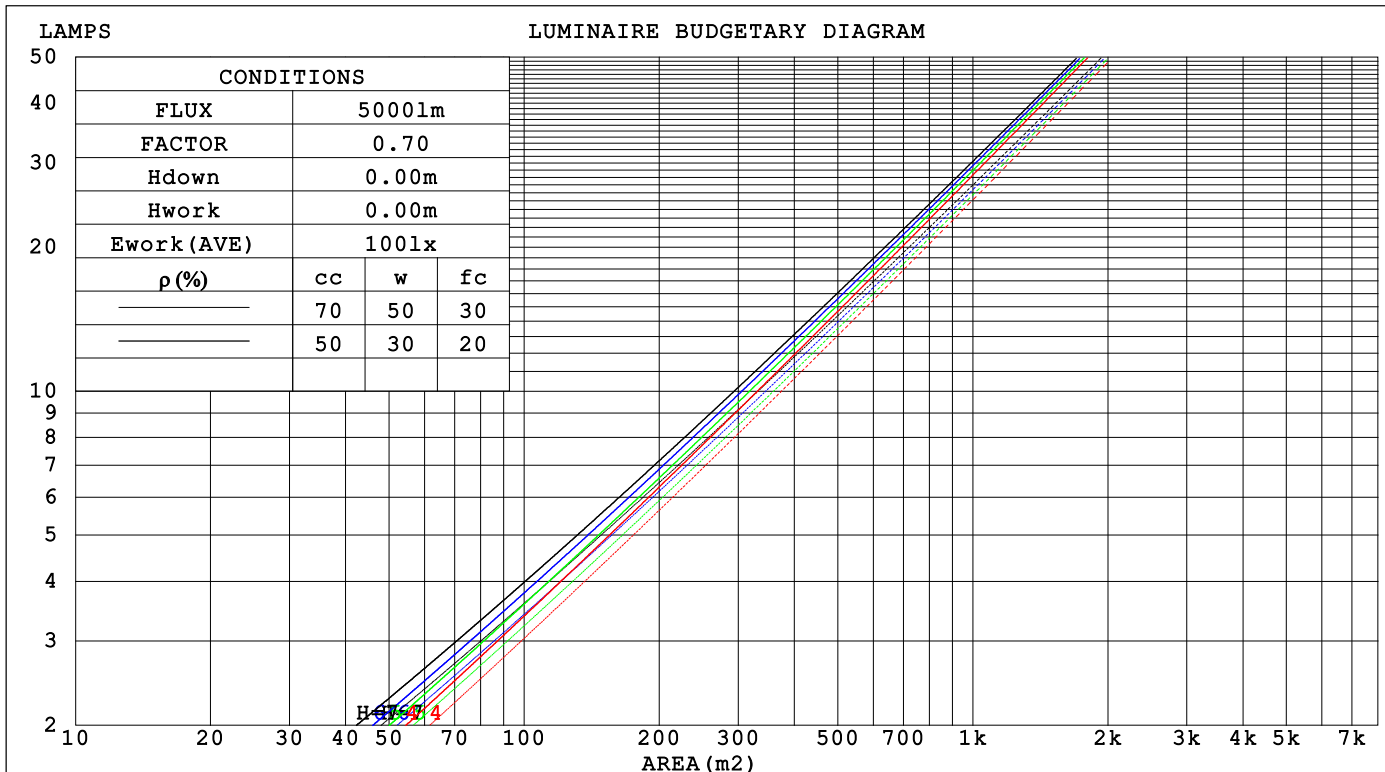

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.168	.095	.030	.161	.092	.029	.149	.085	.027	.137	.079	.025	.126	.073	.024		
2.0	.159	.087	.027	.153	.084	.026	.143	.079	.025	.133	.075	.023	.124	.070	.022		
3.0	.150	.080	.024	.145	.078	.023	.136	.074	.022	.128	.070	.021	.120	.066	.021		
4.0	.141	.073	.022	.137	.072	.021	.129	.069	.021	.122	.066	.020	.116	.063	.019		
5.0	.133	.068	.020	.130	.067	.019	.123	.064	.019	.117	.062	.018	.112	.060	.018		
6.0	.127	.063	.018	.124	.062	.018	.118	.060	.018	.112	.058	.017	.107	.057	.017		
7.0	.120	.060	.017	.118	.059	.017	.113	.057	.016	.108	.055	.016	.104	.054	.016		
8.0	.115	.056	.016	.112	.055	.016	.108	.054	.015	.104	.053	.015	.100	.051	.015		
9.0	.110	.053	.015	.108	.052	.015	.104	.051	.015	.100	.050	.014	.096	.049	.014		
10.0	.105	.050	.014	.103	.050	.014	.100	.049	.014	.096	.048	.014	.093	.047	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016		
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013		
3.0	.141	.113	.091	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011		
4.0	.130	.099	.074	.112	.085	.065	.077	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.121	.087	.062	.104	.075	.054	.071	.052	.038	.041	.031	.022	.013	.010	.007		
6.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006		
7.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005		
8.0	.100	.063	.038	.086	.055	.033	.059	.038	.023	.035	.023	.014	.011	.007	.005		
9.0	.094	.058	.033	.081	.050	.029	.056	.035	.020	.033	.021	.012	.011	.007	.004		
10.0	.090	.053	.029	.077	.046	.025	.054	.032	.018	.031	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm										
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.:		
MFR.: Envisionled					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.7	5.5	4.9	5.7	5.8	4.9	5.8	5.2	5.9	6.1
3H	5.2	6.0	5.5	6.2	6.4	5.3	6.1	5.6	6.3	6.5
4H	5.5	6.2	5.7	6.4	6.6	5.4	6.2	5.7	6.4	6.6
6H	5.6	6.3	5.9	6.5	6.8	5.4	6.1	5.7	6.3	6.6
8H	5.6	6.3	5.9	6.5	6.8	5.3	6.0	5.6	6.3	6.5
12H	5.6	6.2	5.9	6.5	6.7	5.3	5.9	5.6	6.2	6.5
4H 2H	4.9	5.6	5.1	5.8	6.0	5.1	5.8	5.4	6.1	6.3
3H	5.6	6.2	5.9	6.5	6.8	5.6	6.3	5.9	6.5	6.8
4H	5.9	6.5	6.2	6.8	7.1	5.8	6.3	6.1	6.6	6.9
6H	6.1	6.6	6.5	7.0	7.3	5.7	6.3	6.1	6.6	6.9
8H	6.1	6.6	6.5	7.0	7.3	5.7	6.2	6.1	6.5	6.9
12H	6.1	6.5	6.5	6.9	7.3	5.6	6.1	6.1	6.5	6.9
8H 4H	5.9	6.4	6.3	6.7	7.1	5.8	6.3	6.2	6.6	7.0
6H	6.2	6.6	6.6	7.0	7.4	5.8	6.2	6.2	6.6	7.0
8H	6.2	6.6	6.7	7.0	7.4	5.7	6.1	6.2	6.5	6.9
12H	6.2	6.5	6.7	6.9	7.4	5.7	6.0	6.1	6.4	6.9
12H 4H	5.9	6.3	6.3	6.7	7.1	5.7	6.2	6.1	6.6	6.9
6H	6.1	6.5	6.6	6.9	7.3	5.8	6.1	6.2	6.5	7.0
8H	6.2	6.5	6.6	6.9	7.4	5.7	6.0	6.2	6.5	6.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.7					+ 1.1 / - 1.1				
1.5H	+ 0.5 / - 0.3					+ 1.7 / - 0.6				
2.0H	+ 0.8 / - 0.8					+ 1.0 / - 0.9				

CIE Pub.117, 598.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.8)
Area: 0.111111 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

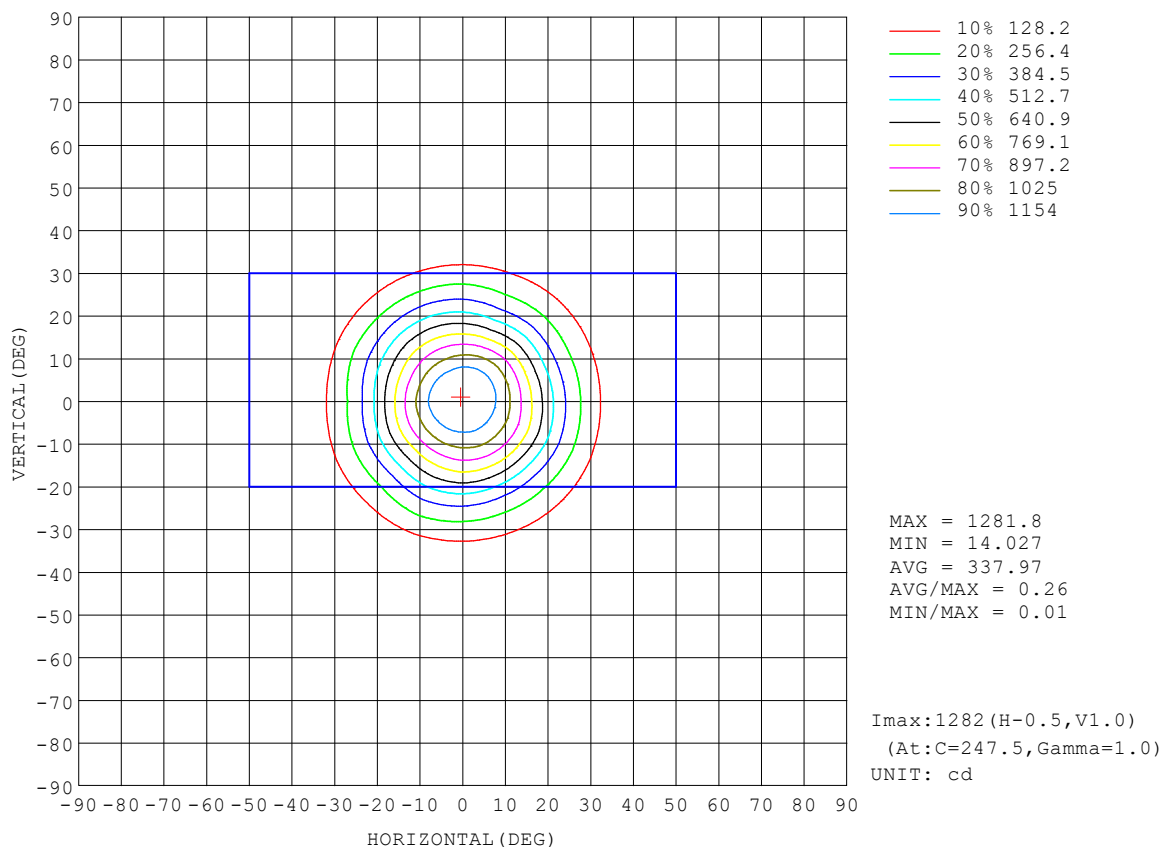


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

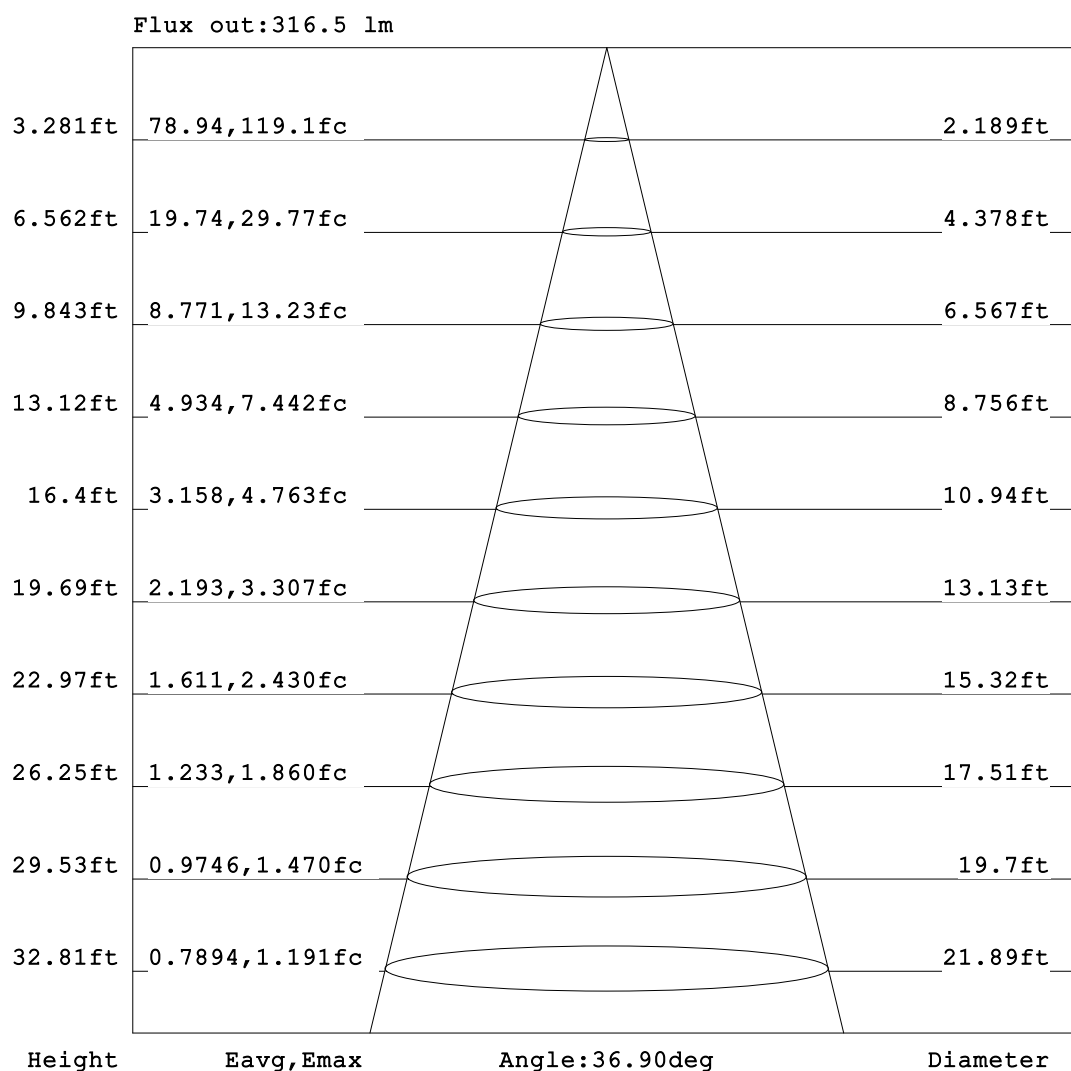


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

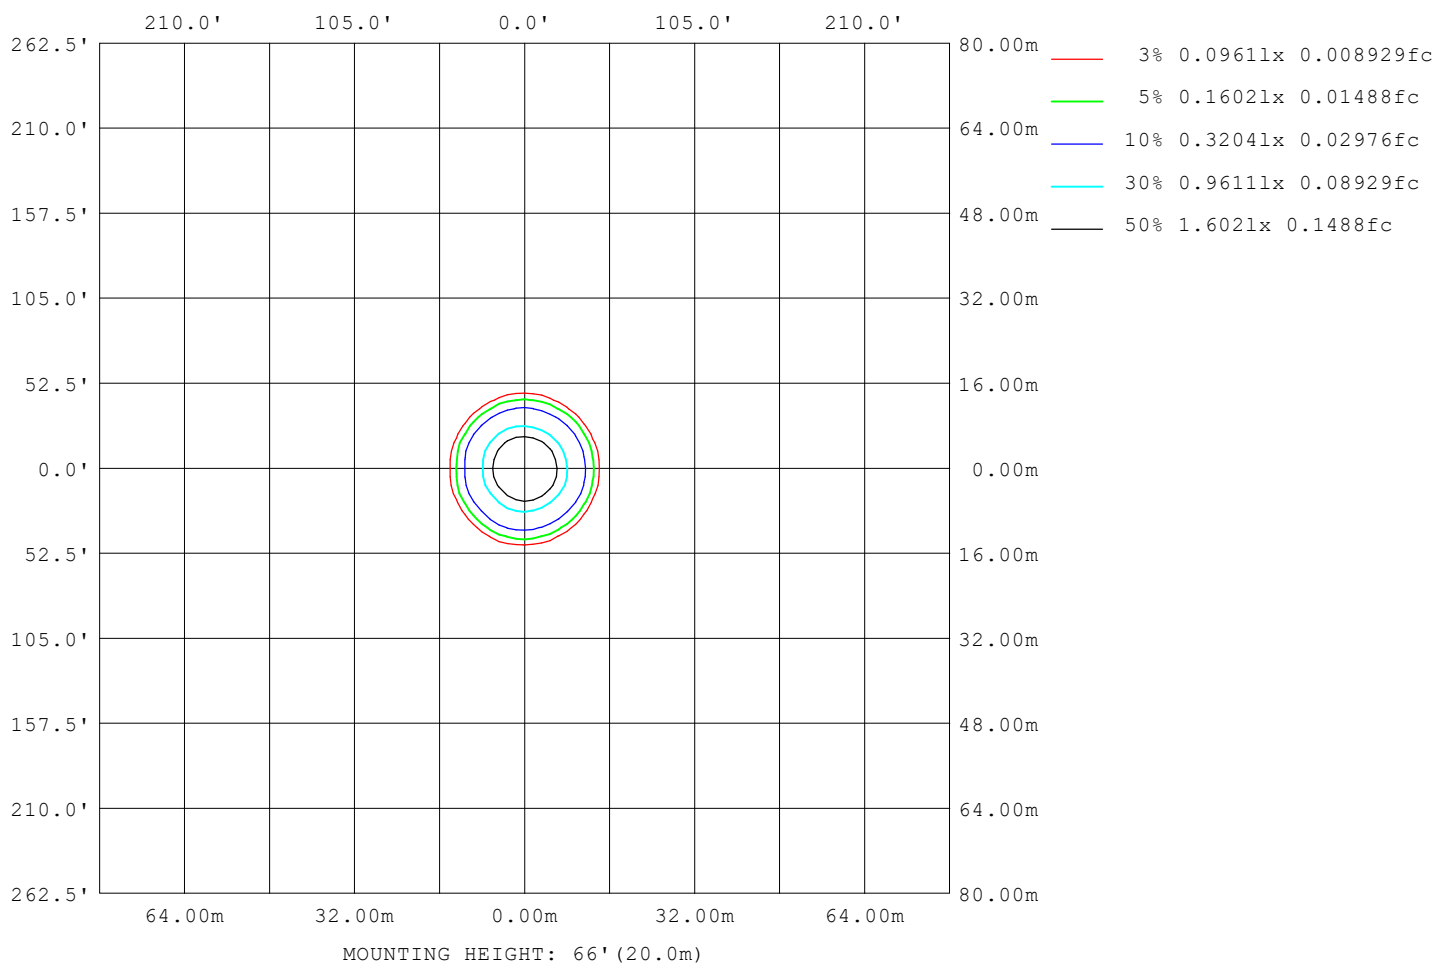

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	179
L_0~180 (75) av	133
L_0~180 (85) av	29
L_90~270 (65) av	169
L_90~270 (75) av	90
L_90~270 (85) av	3
L_45 (65) av	178
L_45 (75) av	113
L_45 (85) av	6

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

Planar Illuminance Curve

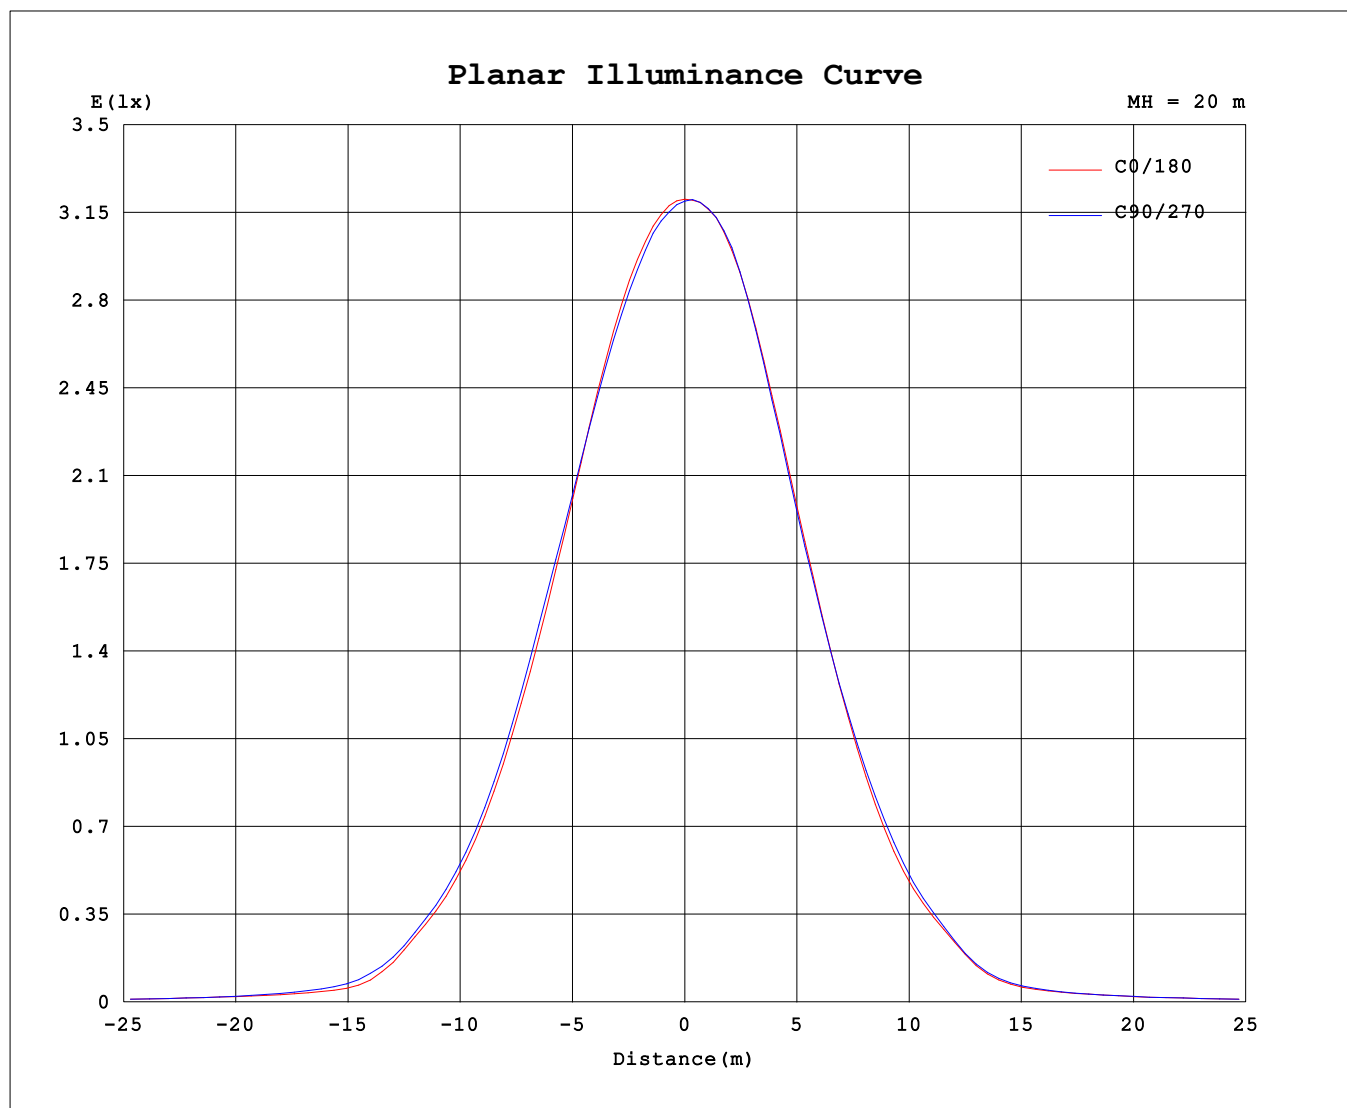

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-02-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

Test:U:119.95V I:0.0858A P:7.5927W PF:0.9473 Freq:59.98Hz Lamp Flux:598.405x1 lm		
NAME: LED-DLJBX-TML-2SQ-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

```