


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.19 lm/W			
MODEL		I _{max} (cd)	209.2	S/MH(C0/180)	1.24
NOMINAL POWER(W)	8	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	569.91	η UP,DN(C0-180)	0.0,48.9
NOMINAL FLUX(lm)	569.908	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

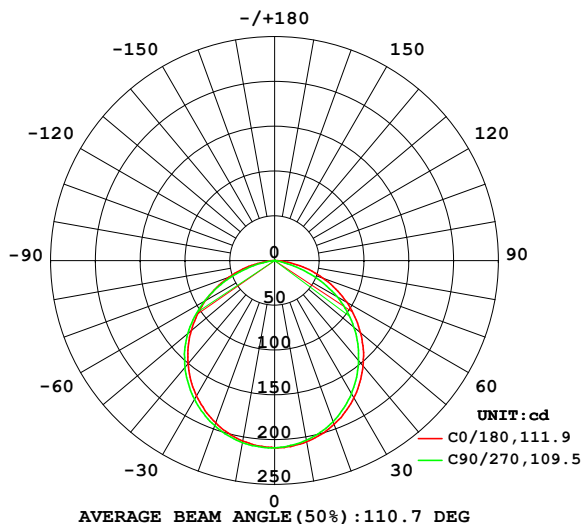

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

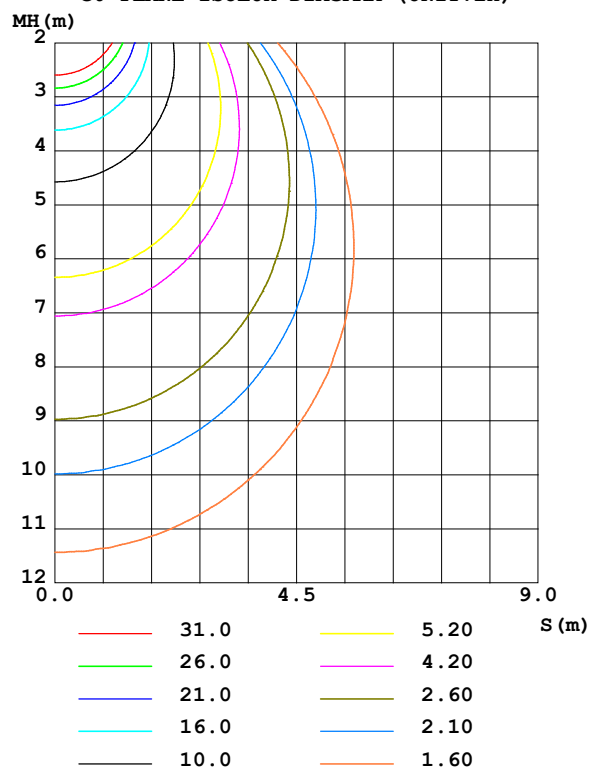

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	205.5	204.7	203.8	204.2	204.7	205.6	206.4	206.4	0- 10	19.76	19.76	3.47,3.47
20	194.5	193.1	191.3	191.3	192.6	194.4	195.9	196.0	10- 20	56.52	76.28	13.4,13.4
30	177.1	174.8	171.6	172.6	174.5	176.7	178.9	179.1	20- 30	85.49	161.8	28.4,28.4
40	153.9	150.3	145.9	147.7	150.4	153.1	155.8	156.0	30- 40	102.8	264.5	46.4,46.4
50	125.2	120.9	115.6	117.6	121.4	124.5	126.6	127.6	40- 50	106.1	370.7	65,65
60	92.84	86.54	80.44	83.89	89.12	90.48	89.99	92.96	50- 60	94.63	465.3	81.6,81.6
70	57.64	47.54	38.99	45.79	54.06	51.59	49.20	54.17	60- 70	68.66	533.9	93.7,93.7
80	21.68	9.146	2.756	8.464	19.33	13.42	9.687	15.15	70- 80	32.18	566.1	99.3,99.3
90	0.2089	0.1853	0.1176	0.1702	0.1316	0.0919	0.1035	0.1427	80- 90	3.780	569.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

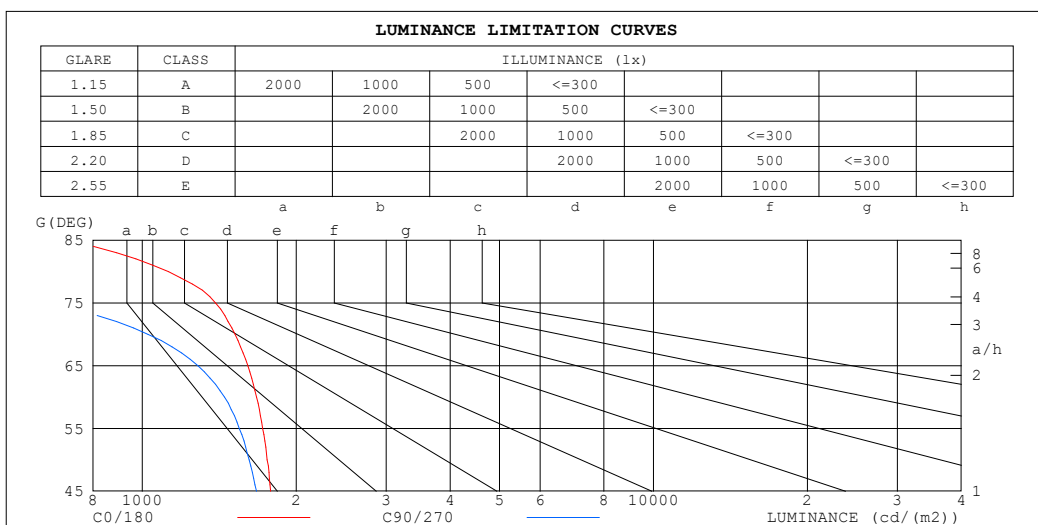

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	758	37
80	1124	143
75	1391	645
70	1518	1026
65	1608	1284
60	1673	1448
55	1718	1548
50	1755	1619
45	1784	1672


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.05	1.01	.97	1.03	.99	.96	.98	.95	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.92	.85	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.77	.73	.71
3.0	.81	.73	.66	.79	.72	.66	.76	.70	.65	.73	.68	.64	.71	.66	.62	.60
4.0	.72	.63	.56	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.52
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.45
6.0	.58	.49	.42	.57	.48	.42	.55	.47	.42	.53	.47	.41	.52	.46	.41	.39
7.0	.52	.44	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.35
8.0	.48	.39	.33	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

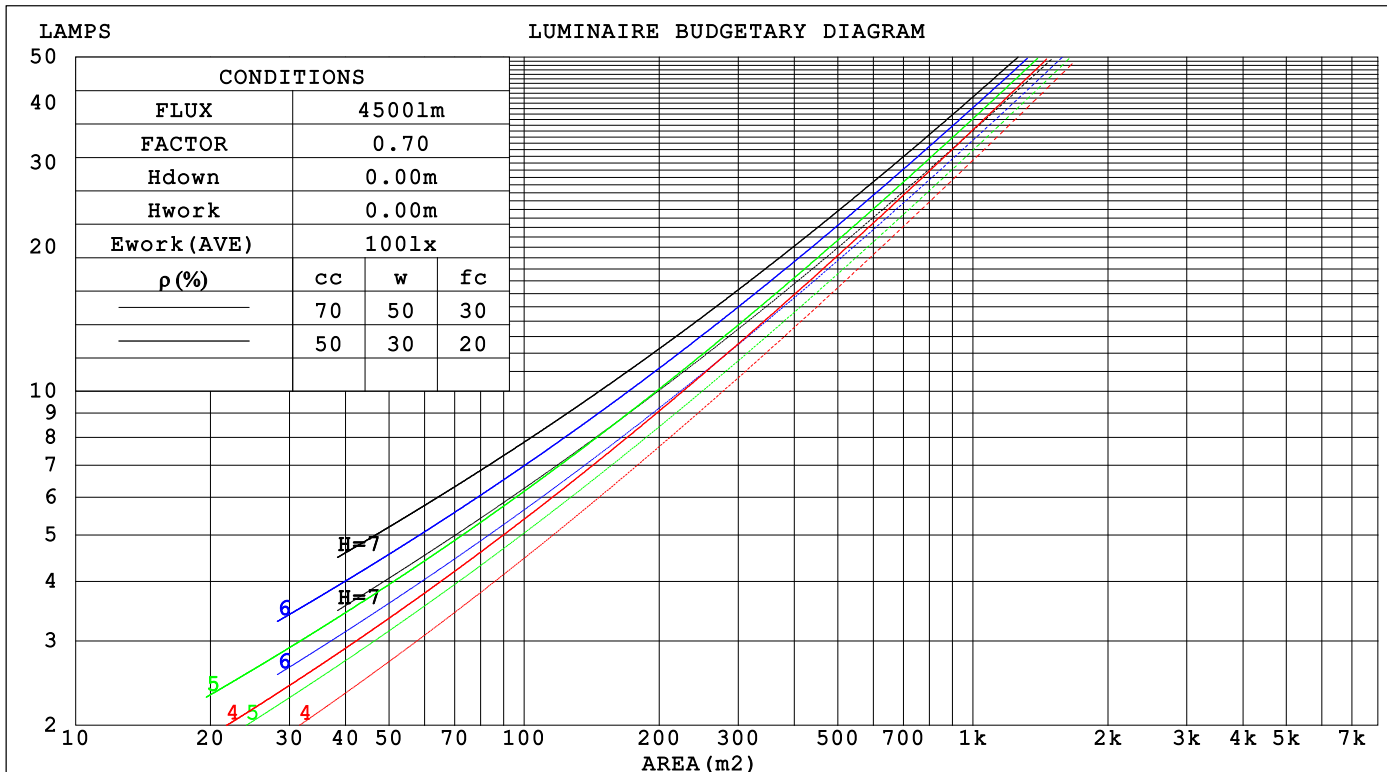

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH			TYPE:			WEIGHT:		
SPEC.: 3000K			DIM.:			SERIAL No.:		
MFR.: Envisionled			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.290	.165	.052	.283	.161	.051	.269	.155	.049	.257	.148	.048	.246	.143	.046		
2.0	.279	.153	.047	.273	.150	.046	.261	.145	.045	.251	.141	.044	.241	.136	.043		
3.0	.261	.139	.042	.256	.137	.041	.246	.133	.040	.236	.129	.040	.227	.126	.039		
4.0	.243	.126	.037	.238	.125	.037	.229	.121	.036	.221	.118	.036	.213	.116	.035		
5.0	.226	.115	.033	.221	.114	.033	.213	.111	.033	.206	.109	.032	.199	.106	.032		
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.192	.100	.029	.186	.098	.029		
7.0	.196	.097	.027	.193	.096	.027	.186	.094	.027	.180	.092	.027	.174	.091	.027		
8.0	.183	.090	.025	.180	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025		
9.0	.172	.083	.023	.169	.083	.023	.164	.081	.023	.159	.080	.023	.155	.079	.023		
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.146	.074	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.179	.156	.136	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015		
2.0	.171	.132	.100	.146	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011		
3.0	.163	.114	.076	.140	.099	.065	.096	.068	.046	.055	.040	.027	.018	.013	.009		
4.0	.155	.101	.059	.133	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007		
5.0	.148	.090	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006		
6.0	.141	.082	.040	.121	.071	.035	.084	.050	.024	.049	.029	.015	.016	.010	.005		
7.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004		
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004		
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003		
10.0	.116	.060	.023	.100	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm										
NAME: LED-SL-PNL-3R-8W-5CCT-WH						TYPE:			WEIGHT:	
SPEC.: 3000K						DIM.:			SERIAL No.:	
MFR.: Envisionled						SUR.:			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	18.3	17.1	18.5	18.7	16.2	17.7	16.5	17.9	18.1
3H	18.3	19.7	18.6	19.9	20.2	17.3	18.7	17.6	18.9	19.1
4H	18.9	20.2	19.2	20.4	20.7	17.5	18.8	17.8	19.0	19.3
6H	19.2	20.5	19.6	20.7	21.0	17.4	18.7	17.8	18.9	19.2
8H	19.3	20.5	19.6	20.8	21.1	17.4	18.6	17.7	18.9	19.2
12H	19.3	20.5	19.7	20.8	21.1	17.3	18.5	17.7	18.8	19.1
4H 2H	17.3	18.6	17.6	18.9	19.1	16.9	18.2	17.2	18.4	18.7
3H	19.0	20.1	19.3	20.4	20.7	18.0	19.2	18.4	19.5	19.8
4H	19.6	20.7	20.0	21.0	21.3	18.3	19.3	18.7	19.7	20.0
6H	20.1	21.0	20.5	21.3	21.7	18.3	19.2	18.7	19.6	19.9
8H	20.2	21.0	20.6	21.4	21.8	18.2	19.1	18.7	19.5	19.8
12H	20.2	21.0	20.6	21.4	21.8	18.2	19.0	18.6	19.4	19.8
8H 4H	19.7	20.6	20.1	20.9	21.3	18.5	19.3	18.9	19.7	20.1
6H	20.2	20.9	20.7	21.3	21.7	18.5	19.2	18.9	19.6	20.0
8H	20.3	21.0	20.8	21.4	21.8	18.4	19.1	18.9	19.5	19.9
12H	20.4	20.9	20.9	21.4	21.9	18.4	18.9	18.9	19.4	19.9
12H 4H	19.7	20.5	20.1	20.8	21.2	18.5	19.2	18.9	19.6	20.0
6H	20.2	20.8	20.6	21.2	21.7	18.5	19.1	18.9	19.5	20.0
8H	20.3	20.9	20.8	21.3	21.8	18.4	19.0	18.9	19.4	19.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.3 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.5				
2.0H	+ 0.3 / - 0.3					+ 0.4 / - 0.4				

CIE Pub.117, 569.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.0)
Area: 0.111111 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	58	47	40	56	46	40	33
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	73	85	77	71	64
2.00	96	88	82	94	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	92	101	95	90	97	92	88	80
4.00	107	102	97	105	100	96	101	97	93	85
5.00	109	105	101	107	103	100	103	99	96	88
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

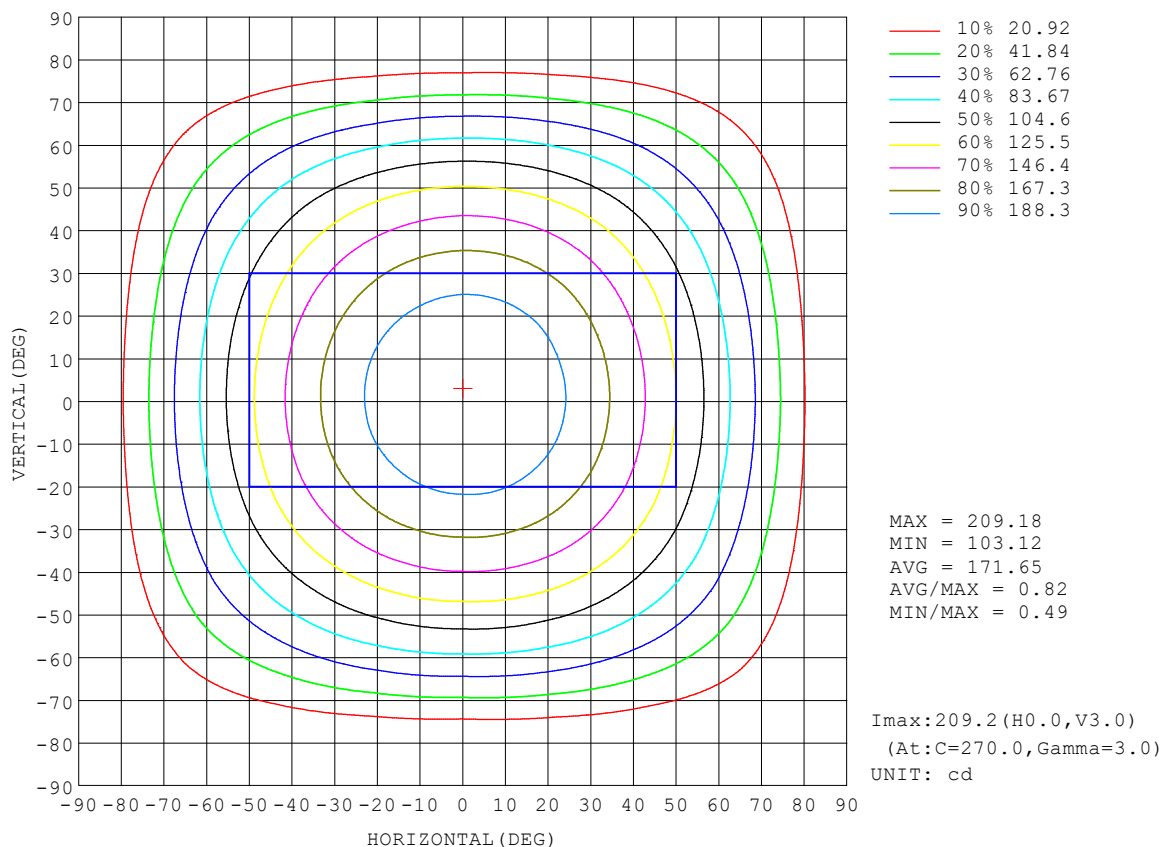


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

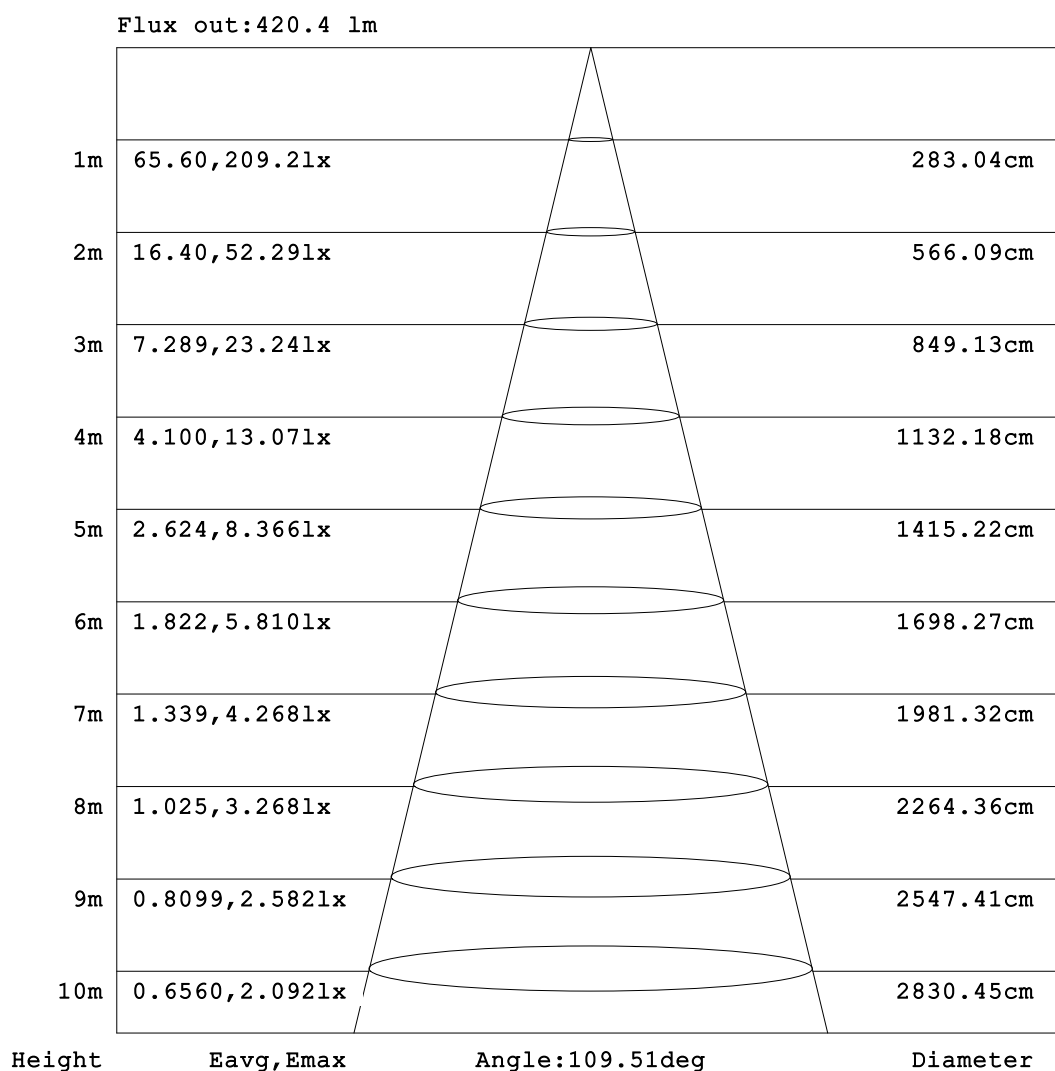


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

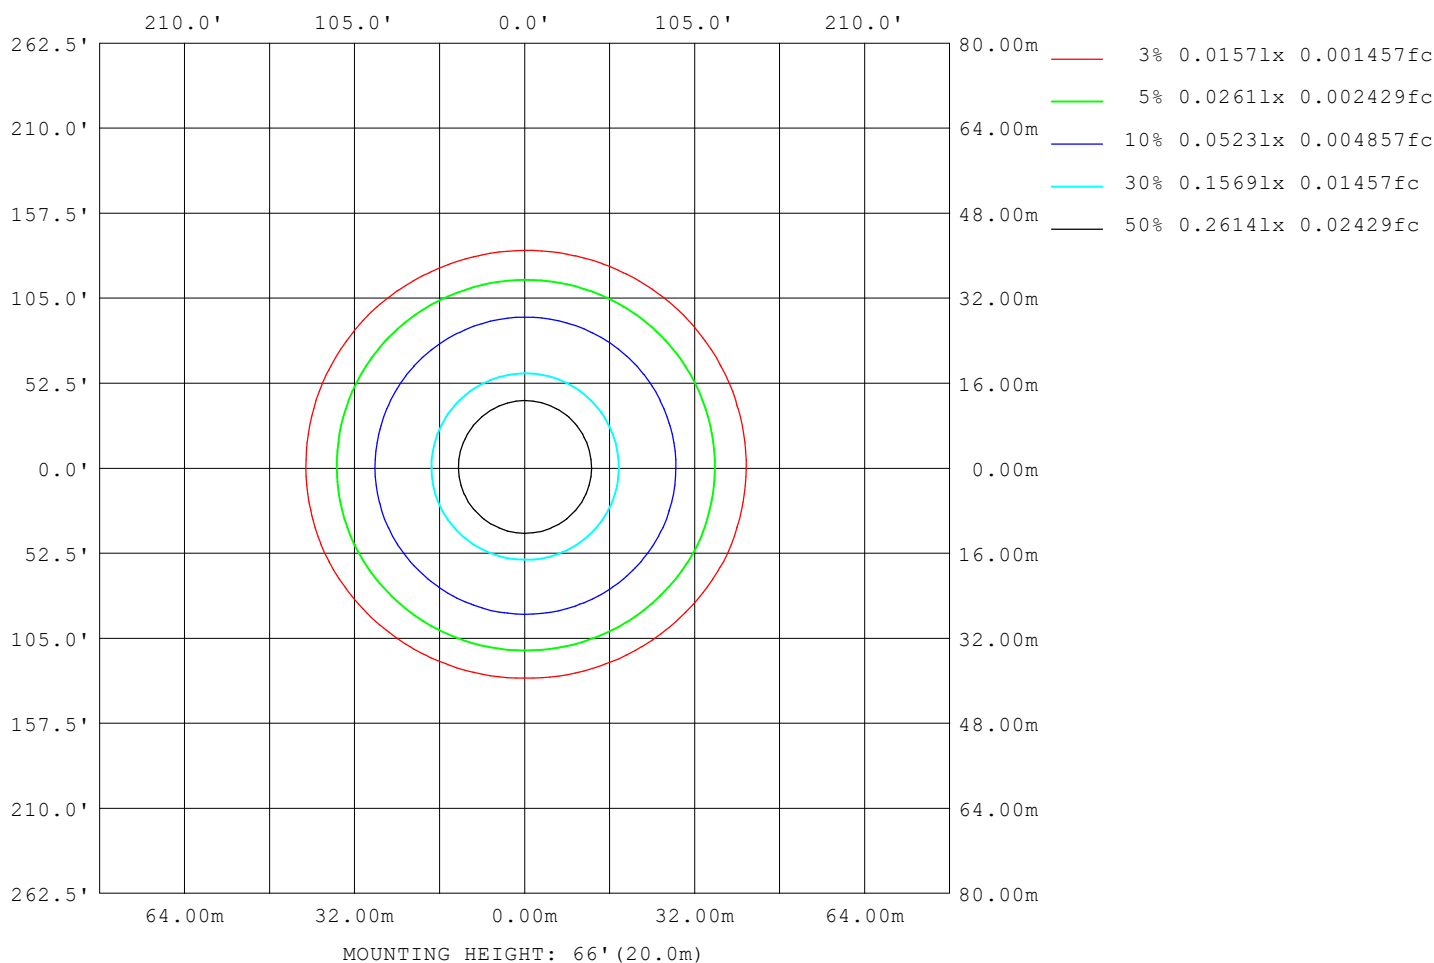

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1567
L_0~180 (75) av	1334
L_0~180 (85) av	675
L_90~270 (65) av	1388
L_90~270 (75) av	819
L_90~270 (85) av	90
L_45 (65) av	1481
L_45 (75) av	1034
L_45 (85) av	88

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:
Test Date:2022-06-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

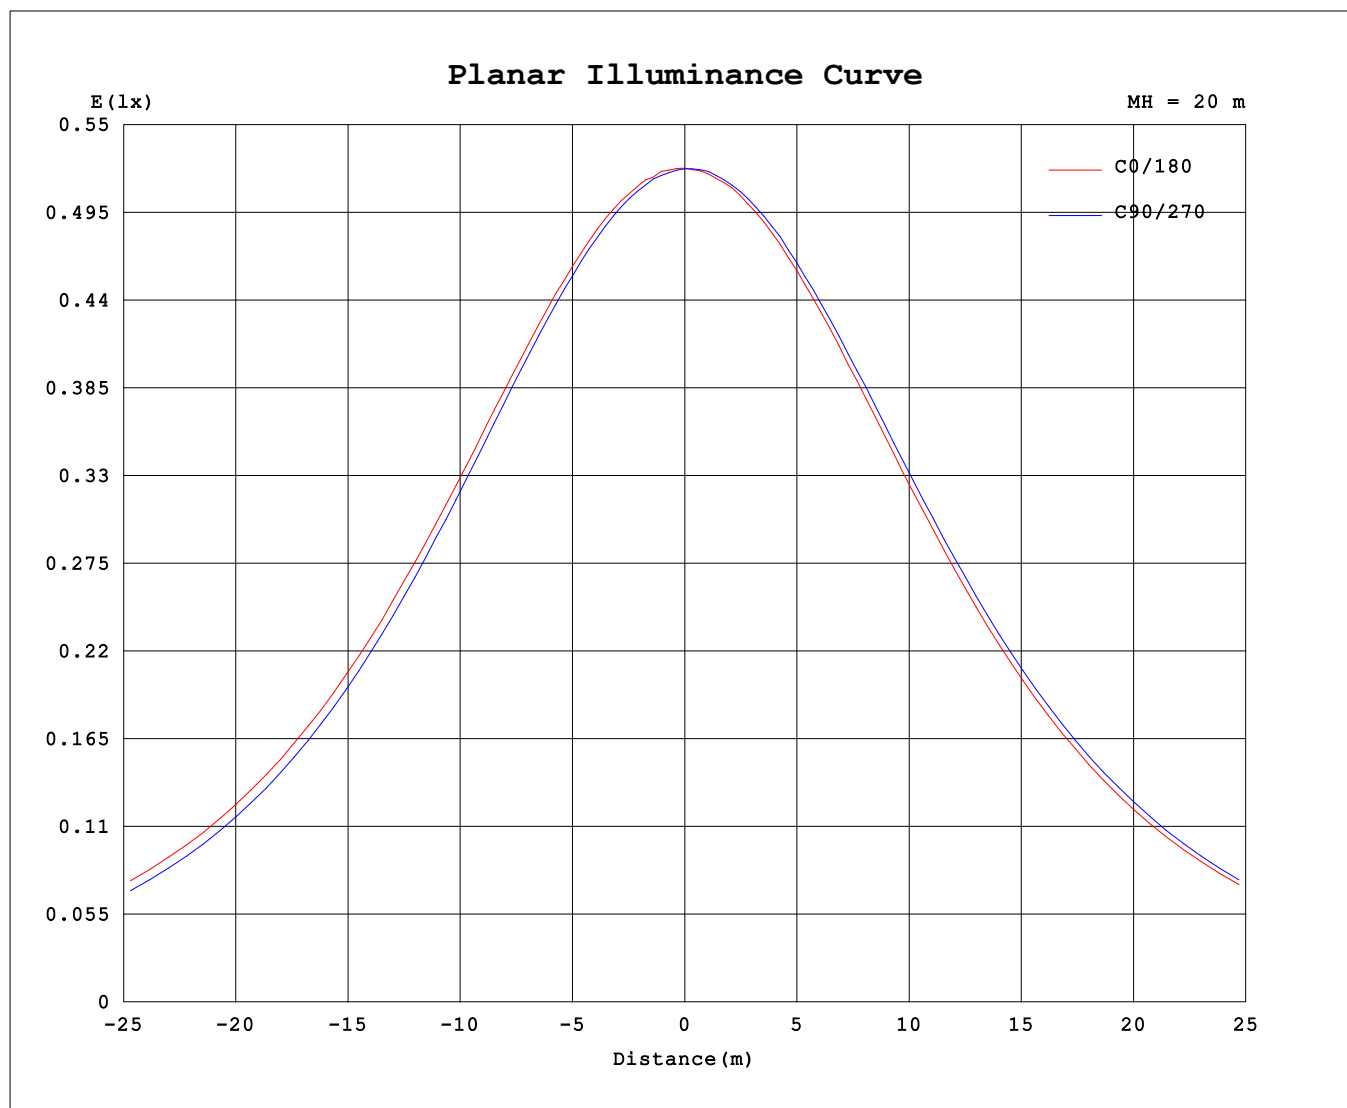

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators:
Test Date: 2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

Test:U:120.25V I:0.0975A P:8.1196W PF:0.6924 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:569.908x1 lm		
NAME: LED-SL-PNL-3R-8W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```