

ARCY-Line: Cylinder Downlights


CACM Modules



3"



4"



6"



**STEM
HUNG**



**CORD
HUNG**



**SURFACE
MOUNT**

Detail Specifications:

- Housing Finish: White or Black
- Reflector Finish: White, Black, Clear-Specular Haze
 - Fixture includes same color reflector as housing standard
- Wet Location Rated
- Beam Angle Adjustable:
 - 3": 25-80°
 - 4 & 6": 35-60°
- Chip: COB, R9 >50, CRI >90
- Low UGR <22
- 5-CCT: 27/30/35/40/50k
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear PC, non-yellowing
- Average life (L70) of 70,000 hours

Applications:

- General Recessed Lighting
- General Suspended & Pendant Lighting
- Residential & Multifamily
- Office, Hallways and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial Lighting

Product Information:

- Deep reflector lens reduces glare and optimizes even beam distribution
- Push-in/pull-out reflector: reflector insert and colors can be swapped
- Adjust the beam angle in the field by hand
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
 - Fixtures are preset to 5000k & max wattage

Driver Options:

- Voltage: UNV: 120-277V
- Tri-Mode Dimming: 0-10V, ELV, Triac
- Class II isolated, Flicker Free
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector

Mounting & Installation:

- Surface mount into 30 or 40 J-box
 - 0.75" height option available for recessed j-box
 - 2.3" height option available for surface mount j-box, pipe, emb
- Suspend with cord or cord + stem
- Can be removed from below the ceiling for service or replacement

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022, CEC T20 Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated
- ASTM-E283 Air-Tight

Specs and model numbers are subject to change with or without notice. Customization of product is available.

ORDERING GUIDE

Series¹

LED-CACM-3-3P15-5CCT
3" Module
LED-CACM-4-3P15-5CCT
4" Module
LED-CACM-4-3P25-5CCT
4" Module
LED-CACM-6-3P25-5CCT
6" Module
LED-CACM-6-3P40-5CCT
6" Module

Finish²

WH
White
BL
Black
BZ²
Bronze
GRY²
Gray
SLV²
Silver
CS²
Custom
Color

Voltage

- UNV -

120
-277V

SJT Cord³

(blank)
No SJT cord
(select this for
surface mount)
7FT
7' SJT
installed to
fixture
12FT
12' SJT
installed to
fixture

Notes: Mounting hardware
is not included with module.

Notes: White and black
standard quick ship finish.
Other finishes are made to
order locally.

Select SJT 5-wire cord
installed into fixture for cord
or stem mounting. SJT
is field cuttable to size.
SJT is also available
for field install.

3P15		3P25		3P40	
WATT	LUMENS	WATT	LUMENS	WATT	LUMENS
15	1,400	25	2,500	40	4,000
10	950	20	2,000	35	3,500
5	500	10	1,000	30	3,000

SURFACE MOUNT OPTIONS

Surface Mount Canopy
0.75" Height for recessed
30/40 j-box

CACM-SH-SM-WH
White
CACM-SH-SM-BL
Black
CACM-SH-SM-BZ¹
Bronze
CACM-SH-SM-GRY¹
Gray
CACM-SH-SM-SLV¹
Silver
CACM-SH-SM-CS¹
Custom Finish

Surface Mount Deep Canopy
2.3" Height for J-box/ Pipe/ Empty
EMB Matching Body

CACM-DP-SM-WH
White
CACM-DP-SM-BL
Black
CACM-DP-SM-BZ¹
Bronze
CACM-DP-SM-GRY¹
Gray
CACM-DP-SM-SLV¹
Silver
CACM-DP-SM-CS¹
Custom Finish

Surface Mount EMB Deep Canopy
2.3" Height
with EMB installed

CACM-DP-SM-WH-EMB
White
CACM-DP-SM-BL-EMB
Black
CACM-DP-SM-BZ-EMB¹
Bronze
CACM-DP-SM-GRY-EMB¹
Gray
CACM-DP-SM-SLV-EMB¹
Silver
CACM-DP-SM-CS-EMB¹
Custom Finish

PENDANT MOUNT CANOPY OPTIONS (Must Purchase Cord)

Pendant Mount Canopy
0.75" Height for recessed
30/40 j-box

CACM-SH-PDM-WH
White
CACM-SH-PDM-BL
Black
CACM-SH-PDM-BZ¹
Bronze
CACM-SH-PDM-GRY¹
Gray
CACM-SH-PDM-SLV¹
Silver
CACM-SH-PDM-CS¹
Custom Finish

Pendant Mount Deep Canopy
2.3" Height for J-box / Pipe
Empty EMB Matching Body

CACM-DP-PDM-WH
White
CACM-DP-PDM-BL
Black
CACM-DP-PDM-BZ¹
Bronze
CACM-DP-PDM-GRY¹
Gray
CACM-DP-PDM-SLV¹
Silver
CACM-DP-PDM-CS¹
Custom Finish

Pendant Mount EMB Deep Canopy
2.3" Height with EMB

CACM-DP-PDM-WH-EMB
White
CACM-DP-PDM-BL-EMB
Black
CACM-DP-PDM-BZ-EMB¹
Bronze
CACM-DP-PDM-GRY-EMB¹
Gray
CACM-DP-PDM-SLV-EMB¹
Silver
CACM-DP-PDM-CS-EMB¹
Custom Finish

PENDANT MOUNT SJT CORD OPTION PENDANT MOUNT STEM OPTION
(Must Purchase Cord with Pendant Mount Canopy) (Power Cord Is Not Included)

White Cords

SJT-18-5-7FT-WH
7' Cord
SJT-18-5-12FT-WH
12' Cord

Black Cords

SJT-18-5-7FT-BL
7' Cord
SJT-18-5-12FT-BL
12' Cord

Cords

CACM-STM-1FT-WH
White
CACM-STM-1FT-BL
Black
CACM-STM-1FT-BZ¹
Bronze
CACM-STM-1FT-GRY¹
Gray
CACM-STM-1FT-SLV¹
Silver
CACM-STM-1FT-CS¹
Custom Finish

1. Cord must be purchased in all pendant application. Cord is not included with stems.

2. 5-Wire- White: Hot, Black: Neutral, Green: Ground, Purple/Gray: 0-10V Dimming wire. Do not connect in triac/elv applications and cap off.

3. 6-wire is not needed in emergency options. Emergency backup location is inside of the canopy. Bring 24 hour power for EMB into the canopy only.

4. Do not hang fixtures by more 11 feet by cord.

5. Cords include quick connect for easy field installation. Cords may be factory ordered pre-installed to the fixture.

1. Connect up to 11 stems together

Footnote:
1. Field installable. Lasts 90 minutes.

TESTED COMPATIBLE DIMMERS


Other dimmers may be compatible but have not been tested. Please contact us for more information.

LEVITON	IP710-DLZ
SYNERGY	ISD BC 120/277 WH
EATON	SF10P-W
LUTRON	DVSTV-WH
HUBBELL	PSD710
HUBBELL	RSD710Z

FEATURES



DIMENSIONS

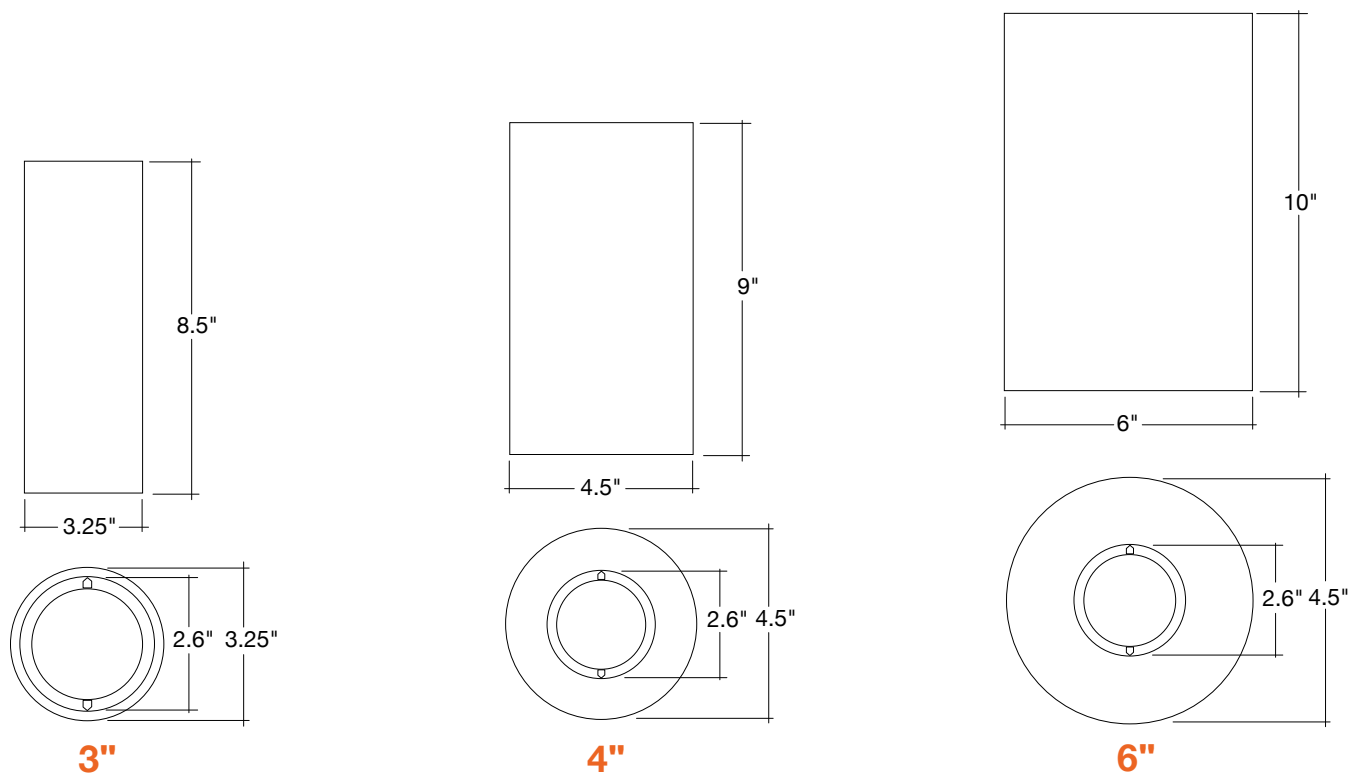


Specs and model numbers are subject to change with or without notice. Customization of product is available.

3"

SKU: LED-CACM-3-3P15-15W-80D
LUMENS: 1314
WATTAGE: 13.64
LER: 96
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	51.05	6.36
6'	22.75	9.55
8'	12.46	12.73
10'	8.07	15.91
12'	5.60	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	333.81	25.4
0-30	673.13	51.2
0-40	1014.84	77.2
0-60	1289.92	98.2
0-80	1310.41	99.7
0-90	1313.74	100

SKU: LED-CACM-3-3P15-15W-25D
LUMENS: 1319
WATTAGE: 13.59
LER: 97
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	207.11	1.85
6'	92.08	2.77
8'	50.72	3.69
10'	32.61	4.62
12'	22.79	5.54



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	632.27	47.9
0-30	955.49	72.4
0-40	1180.69	89.5
0-60	1304.03	98.9
0-80	1317.68	99.9
0-90	1318.85	100

SKU: LED-CACM-3-3P15-10W-80D
LUMENS: 959
WATTAGE: 9.58
LER: 100
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	37.30	6.36
6'	16.58	9.55
8'	9.15	12.73
10'	5.83	15.91
12'	4.11	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	243.68	25.4
0-30	491.39	51.2
0-40	740.83	77.2
0-60	941.64	98.2
0-80	956.60	99.7
0-90	959.03	100

SKU: LED-CACM-3-3P15-10W-25D
LUMENS: 963
WATTAGE: 9.48
LER: 102
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	151.17	1.85
6'	67.16	2.77
8'	37.07	3.69
10'	23.85	4.62
12'	16.62	5.54



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	461.56	47.9
0-30	697.51	72.4
0-40	861.90	89.5
0-60	951.94	98.9
0-80	961.91	99.9
0-90	962.76	100

SKU: LED-CACM-3-3P15-5W-80D
LUMENS: 499
WATTAGE: 4.57
LER: 109
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	19.40	6.36
6'	8.59	9.55
8'	4.80	12.73
10'	3.09	15.91
12'	2.05	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	126.85	25.4
0-30	255.79	51.2
0-40	385.64	77.2
0-60	490.17	98.2
0-80	497.96	99.7
0-90	499.22	100

SKU: LED-CACM-3-3P15-5W-25D
LUMENS: 501
WATTAGE: 4.79
LER: 105
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	78.68	1.85
6'	34.97	2.77
8'	19.21	3.69
10'	12.36	4.62
12'	8.59	5.54




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	240.26	47.9
0-30	363.09	72.4
0-40	448.66	89.5
0-60	495.53	98.9
0-80	500.72	99.9
0-90	501.16	100

4"

SKU: LED-CACM-4-3P15-15W-60D
LUMENS: 1353
WATTAGE: 13.85
LER: 98
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	52.61	6.36
6'	23.35	9.55
8'	12.91	12.73
10'	8.24	15.91
12'	5.79	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	343.83	25.4
0-30	693.32	51.2
0-40	1045.29	77.2
0-60	1328.62	98.2
0-80	1349.73	99.7
0-90	1353.16	100

SKU: LED-CACM-4-3P15-15W-35D
LUMENS: 1372
WATTAGE: 13.86
LER: 99
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	215.35	1.85
6'	95.71	2.77
8'	52.82	3.69
10'	33.98	4.62
12'	23.72	5.54



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	657.56	47.9
0-30	993.71	72.4
0-40	1227.91	89.5
0-60	1356.19	98.9
0-80	1370.39	99.9
0-90	1371.60	100

SKU: LED-CACM-4-3P15-10W-60D
LUMENS: 972
WATTAGE: 9.81
LER: 99
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	37.77	6.36
6'	16.82	9.55
8'	9.30	12.73
10'	6.01	15.91
12'	4.11	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	247.02	25.4
0-30	498.12	51.2
0-40	750.98	77.2
0-60	954.54	98.2
0-80	969.71	99.7
0-90	972.17	100

SKU: LED-CACM-4-3P15-10W-35D
LUMENS: 976
WATTAGE: 9.75
LER: 100
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	153.28	1.85
6'	68.12	2.77
8'	37.52	3.69
10'	24.20	4.62
12'	16.81	5.54



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	467.88	47.9
0-30	707.07	72.4
0-40	873.71	89.5
0-60	964.98	98.9
0-80	975.08	99.9
0-90	975.95	100

SKU: LED-CACM-4-3P15-5W-60D
LUMENS: 512
WATTAGE: 4.67
LER: 110
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.18 (0-180), 1.22 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	19.94	6.36
6'	8.83	9.55
8'	4.95	12.73
10'	3.09	15.91
12'	2.24	19.09



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	130.19	25.4
0-30	262.52	51.2
0-40	395.79	77.2
0-60	503.07	98.2
0-80	511.06	99.7
0-90	512.36	100

SKU: LED-CACM-4-3P15-5W-35D
LUMENS: 514
WATTAGE: 4.92
LER: 105
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.44 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	80.79	1.85
6'	35.94	2.77
8'	19.81	3.69
10'	12.70	4.62
12'	8.78	5.54




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	246.58	47.9
0-30	372.64	72.4
0-40	460.47	89.5
0-60	508.57	98.9
0-80	513.89	99.9
0-90	514.35	100

4"

SKU: LED-CACM-4-3P25-25W-60D
LUMENS: 2296
WATTAGE: 23.96
LER: 96
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	121.29	5.00
6'	53.85	7.50
8'	29.71	10.00
10'	19.05	12.50
12'	13.26	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	629.69	27.4
0-30	1204.38	52.5
0-40	1728.74	75.3
0-60	2244.46	97.8
0-80	2294.39	99.9
0-90	2295.65	100

SKU: LED-CACM-4-3P25-25W-35D
LUMENS: 2249
WATTAGE: 23.84
LER: 94
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	274.84	2.37
6'	122.09	3.55
8'	67.38	4.74
10'	43.25	5.92
12'	30.26	7.11



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1019.66	45.3
0-30	1570.07	69.8
0-40	1947.45	86.6
0-60	2208.86	98.2
0-80	2248.33	100
0-90	2249.04	100

SKU: LED-CACM-4-3P25-20W-60D
LUMENS: 1928
WATTAGE: 19.83
LER: 97
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	101.89	5.00
6'	45.25	7.50
8'	24.91	10.00
10'	16.13	12.50
12'	11.21	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	528.94	27.4
0-30	1011.68	52.5
0-40	1452.14	75.3
0-60	1885.35	97.8
0-80	1927.29	99.9
0-90	1928.35	100

SKU: LED-CACM-4-3P25-20W-35D
LUMENS: 1889
WATTAGE: 19.83
LER: 95
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	230.87	2.37
6'	102.61	3.55
8'	56.57	4.74
10'	36.38	5.92
12'	25.40	7.11



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	856.51	45.3
0-30	1318.86	69.8
0-40	1635.86	86.6
0-60	1855.44	98.2
0-80	1888.59	100
0-90	1889.19	100

SKU: LED-CACM-4-3P25-15W-60D
LUMENS: 964
WATTAGE: 8.96
LER: 108
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	50.91	5.00
6'	22.63	7.50
8'	12.46	10.00
10'	8.07	12.50
12'	5.60	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	264.47	27.4
0-30	505.84	52.5
0-40	726.07	75.3
0-60	942.67	97.8
0-80	963.64	99.9
0-90	964.17	100

SKU: LED-CACM-4-3P25-15W-35D
LUMENS: 945
WATTAGE: 8.76
LER: 108
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	115.43	2.37
6'	51.30	3.55
8'	28.21	4.74
10'	18.19	5.92
12'	12.70	7.11




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	428.26	45.3
0-30	659.43	69.8
0-40	817.93	86.6
0-60	927.72	98.2
0-80	944.30	100
0-90	944.60	100

6"

SKU: LED-CACM-6-3P25-25W-60D
LUMENS: 2353
WATTAGE: 24.17
LER: 97
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	124.28	5.00
6'	55.30	7.50
8'	30.46	10.00
10'	19.56	12.50
12'	13.63	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	645.43	27.4
0-30	1234.49	52.5
0-40	1771.95	75.3
0-60	2300.57	97.8
0-80	2351.75	99.9
0-90	2353.04	100

SKU: LED-CACM-6-3P25-25W-35D
LUMENS: 2294
WATTAGE: 23.91
LER: 96
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	280.35	2.37
6'	124.63	3.55
8'	68.73	4.74
10'	44.10	5.92
12'	30.82	7.11



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1040.05	45.3
0-30	1601.47	69.8
0-40	1986.40	86.6
0-60	2253.04	98.2
0-80	2293.29	100
0-90	2294.02	100

SKU: LED-CACM-6-3P25-20W-60D
LUMENS: 1963
WATTAGE: 19.76
LER: 99
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	103.73	5.00
6'	46.10	7.50
8'	25.36	10.00
10'	16.30	12.50
12'	11.39	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	538.38	27.4
0-30	1029.75	52.5
0-40	1478.07	75.3
0-60	1919.02	97.8
0-80	1961.70	99.9
0-90	1962.78	100

SKU: LED-CACM-6-3P25-20W-35D
LUMENS: 1912
WATTAGE: 19.87
LER: 96
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	233.59	2.37
6'	103.82	3.55
8'	57.17	4.74
10'	36.90	5.92
12'	25.59	7.11



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	866.71	45.3
0-30	1334.56	69.8
0-40	1655.34	86.6
0-60	1877.53	98.2
0-80	1911.08	100
0-90	1911.69	100

SKU: LED-CACM-6-3P25-15W-60D
LUMENS: 999
WATTAGE: 8.76
LER: 114
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.94 (0-180), 0.92 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	52.75	5.00
6'	23.47	7.50
8'	12.91	10.00
10'	8.24	12.50
12'	5.79	15.00



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	273.92	27.4
0-30	523.91	52.5
0-40	752.00	75.3
0-60	976.34	97.8
0-80	998.06	99.9
0-90	998.61	100

SKU: LED-CACM-6-3P25-15W-35D
LUMENS: 990
WATTAGE: 8.92
LER: 111
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.56 (0-180), 0.56 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	120.95	2.37
6'	53.72	3.55
8'	29.56	4.74
10'	19.05	5.92
12'	13.26	7.11




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	448.65	45.3
0-30	690.83	69.8
0-40	856.88	86.6
0-60	971.90	98.2
0-80	989.26	100
0-90	989.58	100

6"

SKU: LED-CACM-6-3P40-40W-60D
 LUMENS: 3638
 WATTAGE: 38.7
 LER: 96CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.82 (0-180), 0.82 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	217.19	4.34
6'	96.56	6.52
8'	53.27	8.69
10'	34.15	10.86
12'	23.91	13.03



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1050.88	28.9
0-30	1953.75	53.7
0-40	2770.02	76.1
0-60	3591.29	98.7
0-80	3632.69	99.9
0-90	3637.71	100

SKU: LED-CACM-6-3P40-40W-35D
 LUMENS: 3508
 WATTAGE: 38.3
 LER: 96CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.58 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	387.28	2.52
6'	172.18	3.78
8'	94.84	5.04
10'	61.09	6.31
12'	42.59	7.57



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1506.56	42.9
0-30	2386.89	68
0-40	3004.32	85.6
0-60	3468.16	98.9
0-80	3505.02	99.9
0-90	3507.75	100

SKU: LED-CACM-6-3P40-35W-60D
 LUMENS: 3419
 WATTAGE: 34.58
 LER: 96CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.82 (0-180), 0.82 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	204.12	4.34
6'	90.75	6.52
8'	49.97	8.69
10'	32.09	10.86
12'	22.41	13.03



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	987.82	28.9
0-30	1836.53	53.7
0-40	2603.82	76.1
0-60	3375.81	98.7
0-80	3414.72	99.9
0-90	3419.45	100

SKU: LED-CACM-6-3P40-35W-35D
 LUMENS: 3262
 WATTAGE: 34.14
 LER: 96CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.58 (0-180), 0.56 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	360.19	2.52
6'	160.08	3.78
8'	88.24	5.04
10'	56.80	6.31
12'	39.60	7.57



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1401.10	42.9
0-30	2219.81	68
0-40	2794.01	85.6
0-60	3225.39	98.9
0-80	3259.67	99.9
0-90	3262.21	100

SKU: LED-CACM-6-3P40-30W-60D
 LUMENS: 2910
 WATTAGE: 29.97
 LER: 100
 CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.82 (0-180), 0.82 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	173.76	4.34
6'	77.20	6.52
8'	42.62	8.69
10'	27.46	10.86
12'	19.05	13.03




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	840.70	28.9
0-30	1563.00	53.7
0-40	2216.02	76.1
0-60	2873.03	98.7
0-80	2906.15	99.9
0-90	2910.17	100

SKU: LED-CACM-6-3P40-30W-35D
 LUMENS: 2806
 WATTAGE: 29.29
 LER: 96
 CCT/CRI: 27/30/35/40/50K / >90CRI
 SPACING CRITERIA: 0.58 (0-180), 0.56 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	309.82	2.52
6'	137.70	3.78
8'	75.93	5.04
10'	48.91	6.31
12'	33.99	7.57




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	1205.25	42.9
0-30	1909.51	68
0-40	2403.45	85.6
0-60	2774.53	98.9
0-80	2804.02	99.9
0-90	2806.20	100



CACM-SH-SM-WH




CACM-SH-SM-BL




CACM-DP-SM-WH




CACM-DP-SM-BL



CACM-DP-SM-WH-EMB




CACM-DP-SM-BL-EMB



CACM-SH-PDM-WH




CACM-SH-PDM-BL



CACM-DP-PDM-WH



CACM-DP-PDM-BL



CACM-DP-PDM-WH-EMB



CACM-DP-PDM-BL-EMB



SJT-18-5-7FT-WH
SJT-18-5-12FT-WH



SJT-18-5-7FT-BL
SJT-18-5-12FT-BL



CACM-STM-1FT-WH



CACM-STM-1FT-BL

Model	Voltage	Watts	Lumens	Color	CRI
LED-CACM-3-3P15-5CCT-WH-UNV	120-277V	15/10/5w	1,400/950/500	27/30/35/40/50K	>90
LED-CACM-3-3P15-5CCT-BL-UNV	120-277V	15/10/5w	1,400/950/500	27/30/35/40/50K	>90
LED-CACM-4-3P15-5CCT-WH-UNV	120-277V	15/10/5w	1,400/950/500	27/30/35/40/50K	>90
LED-CACM-4-3P15-5CCT-BL-UNV	120-277V	15/10/5w	1,400/950/500	27/30/35/40/50K	>90
LED-CACM-4-3P25-5CCT-WH-UNV	120-277V	25/20/10	2,500/2,000/1,000	27/30/35/40/50K	>90
LED-CACM-4-3P25-5CCT-BL-UNV	120-277V	25/20/10	2,500/2,000/1,000	27/30/35/40/50K	>90
LED-CACM-6-3P25-5CCT-WH-UNV	120-277V	25/20/10	2,500/2,000/1,000	27/30/35/40/50K	>90
LED-CACM-6-3P25-5CCT-BL-UNV	120-277V	25/20/10	2,500/2,000/1,000	27/30/35/40/50K	>90
LED-CACM-6-3P40-5CCT-WH-UNV	120-277V	40/35/30w	4,000/3,500/3,000	27/30/35/40/50K	>90
LED-CACM-6-3P40-5CCT-BL-UNV	120-277V	40/35/30w	4,000/3,500/3,000	27/30/35/40/50K	>90

SURFACE MOUNT CANOPY

Model	Description
CACM-SH-SM-WH	Surface Mount Canopy 0.75" Height
CACM-SH-SM-BL	Surface Mount Canopy 0.75" Height

SURFACE MOUNT DEEP CANOPY

Model	Description
CACM-DP-SM-WH	Surface Mount Canopy 2.3" Height for J-box/ Pipe
CACM-DP-SM-BL	Surface Mount Canopy 2.3" Height for J-box/ Pipe

SURFACE MOUNT EMB DEEP CANOPY

Model	Description
CACM-DP-SM-WH-EMB	Surface Mount Canopy 2.3" Height for J-box/ Pipe/ EMB
CACM-DP-SM-BL-EMB	Surface Mount Canopy 2.3" Height for J-box/ Pipe/ EMB

PENDANT MOUNT CANOPY

Model	Description
CACM-SH-PDM-WH	Pendant Canopy 0.75" Height: Fixed or Slanted
CACM-SH-PDM-BL	Pendant Canopy 0.75" Height: Fixed or Slanted

PENDANT MOUNT DEEP CANOPY

Model	Description
CACM-DP-PDM-WH	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB
CACM-DP-PDM-BL	Pendant Canopy 2.3" Height: Fixed or Slanted J-box for pipe or EMB

SURFACE MOUNT EMB DEEP CANOPY

Model	Description
CACM-DP-PDM-WH-EMB	Surface Mount Canopy 2.3" Height for J-box/ Pipe/ EMB
CACM-DP-PDM-BL-EMB	Surface Mount Canopy 2.3" Height for J-box/ Pipe/ EMB

PENDANT MOUNT SJT CORDS

Model	Description	Model	Description
SJT-18-5-7FT-WH	7' 5-Wire White Cord	SJT-18-5-7FT-BL	7' 5-Wire Black Cord
SJT-18-5-12FT-WH	12' 5-Wire White Cord	SJT-18-5-12FT-BL	12' 5-Wire Black Cord

SURFACE MOUNT STEMS

Model	Description
CACM-STM-1FT-WH	1ft Stem Mount - (Connect up to 11ft)
CACM-STM-1FT-BL	1ft Stem Mount - (Connect up to 11ft)