


SnapTrim-Line: 4" Floating Gimbal

Canless Series

Canless

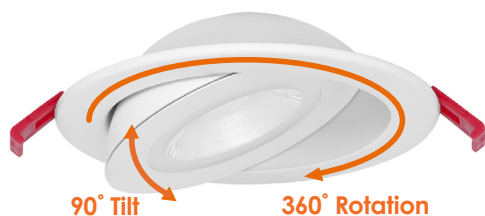

Detail Specification:

- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Standard round trim included
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension:
- 4": 4-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Series	Emergency	Beam Angle
LED-SL-FLT-4R-9W-5CCT-WH	☐	☐
9W • 700 Lumens	(Blank) No Emergency Backup EMB Emergency Backup	(Blank) 38° Degree 24D 24° Degree 60D 60° Degree

Optional Accessories (Order Separately)

New Construction Plates	Extension Cables	Emergency Backup ¹ (field install)	Optics
☐	☐	☐	☐
CUNV-NC-ICAT-7H Universal Plate with hanging bars (Round fixtures only)	JBX-EXT-6'-2PIN 6' Extension JBX-EXT-10'-2PIN 10' Extension	LED-EMB-15W -HV-0/10V-2P Up to 14W fixtures LED-EMB-25W -HV-0/10V-2P Up to 24W fixtures	OPTIC-63X22-24D Field Installable 24 Degree Lens for 4" OPTIC-63X22-60D Field Installable 60 Degree Lens for 4"


1. Field installable.
Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

FEATURES




DIMENSIONS

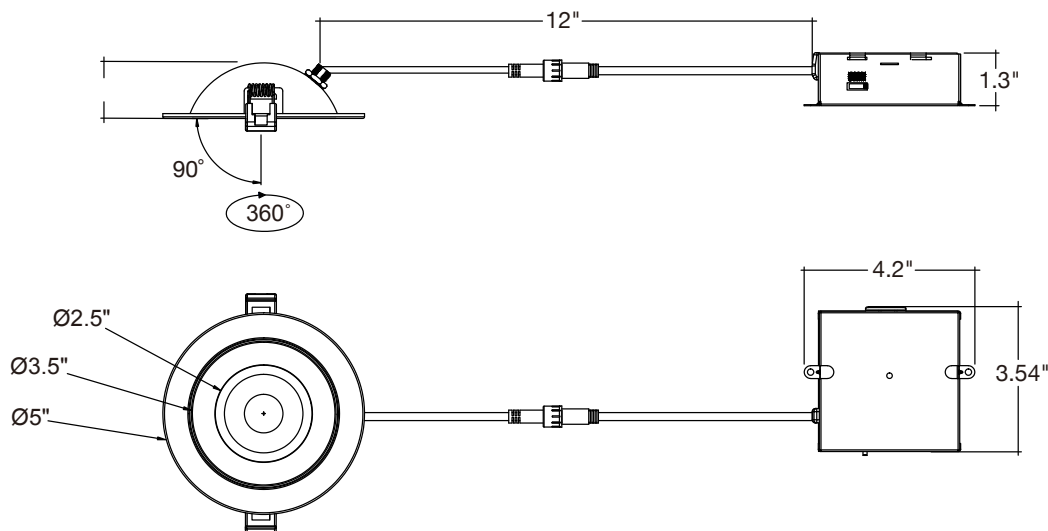

SKU: LED-SL-FLT-4R-9W-5CCT-WH-60D
LUMENS: 785
WATTAGE: 8.96
LER: 88
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 1.04 (0-180), 1.10 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	37.43	5.40
6'	16.58	8.09
8'	9.15	10.79
10'	5.83	13.49
12'	4.11	16.19



Zonal Lumen Summary		
Zone	Lumens	%Fxt
0-20	219.69	28.0
0-30	436.09	55.5
0-40	606.78	77.3
0-60	743.58	94.7
0-80	777.98	99.1
0-90	779.77	99.3

SKU: LED-SL-FLT-4R-9W-5CCT-WH-38D
LUMENS: 802
WATTAGE: 9
LER: 89
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.54 (0-180), 0.54 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	140.89	1.99
6'	62.56	2.99
8'	34.51	3.99
10'	22.14	4.99
12'	15.50	5.98



Zonal Lumen Summary		
Zone	Lumens	%Fxt
0-20	461.42	57.6
0-30	620.58	77.4
0-40	693.68	86.5
0-60	760.96	94.9
0-80	794.16	99.1
0-90	795.95	99.3


SKU: LED-SL-FLT-4R-9W-5CCT-WH-24D
LUMENS: 786
WATTAGE: 8.96
LER: 96
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.46 (0-180), 0.46 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	177.51	1.85
6'	78.89	2.77
8'	43.52	3.69
10'	27.97	4.62
12'	19.42	5.54




Zonal Lumen Summary		
Zone	Lumens	%Fxt
0-20	524.05	66.6
0-30	661.36	84.1
0-40	703.32	89.4
0-60	752.36	95.7
0-80	779.09	99.1
0-90	780.83	99.3

ACCESSORIES



CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

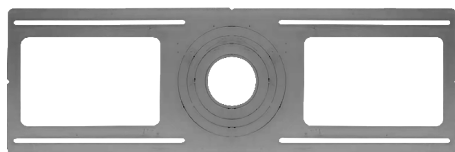

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' Extension Cable



LED-EMB-15W-HV-0/10V-2P
LED-EMB-25W-HV-0/10V-2P



OPTIC-63X22-24D
OPTIC-63X22-60D

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-FLT-4R-9W-5CCT-WH	120V	9W	700	27/30/35/40/50k	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate (Round fixtures only)
CUNV-JBX-RI-XL	Universal tough in plate Extra Long (Round fixtures only)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-63X22-24D	Field Installable 24 Degree Lens for 4" model
OPTIC-63X22-60D	Field Installable 60 Degree Lens for 4" model

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			