

4" LED Round Scoop Downlight

5-CCT Selectable



Detail Specification:

- Finish: White
- Wet Location Rated
- Beam Angle: 38°
- Chip: COB Chip, R9 >50, CRI >90
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions 4 3/8"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series

LED-SL-SCP-4R-12W-5CCT-WH
12W • 900lm

Optional Accessories (Order Separately)

New Construction Plates

CUNV-NC-ICAT-7H
Universal plate
w/ hanging bars
C4-JBX-RI
4" Rough in plate

Extension Cables

JBX-EXT-6'-2PIN
6' Extension
JBX-EXT-10'-2PIN
10' Extension

Emergency Backup ¹ (Field Install)

LED-EMB-25W-HV
-0/10V-2P
Up to 24W fixtures


1. Field installable.
Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.



4" LED Round Scoop Downlight

5-CCT Selectable

FEATURES

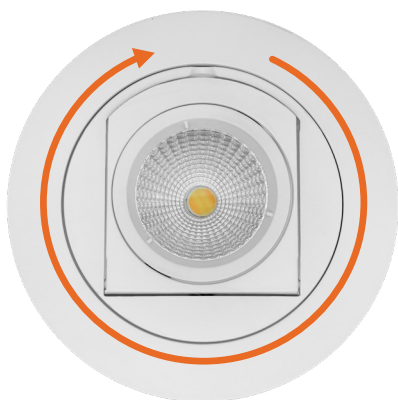


DIMENSIONS

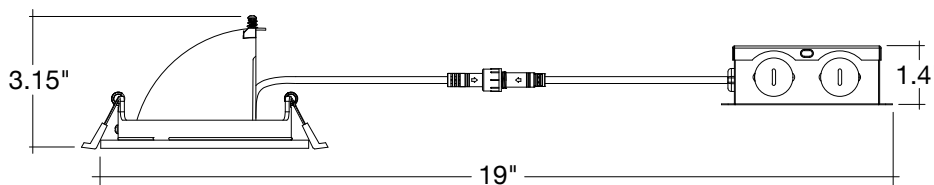

SKU: LED-SL-SCP-4R-12W-5CCT-60D
LUMENS: 936
WATTAGE: 11.09
LER: 84
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.74 (0-180), 0.74 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	70.17	3.65
6'	31.22	5.47
8'	17.26	7.29
10'	10.98	9.11
12'	7.66	10.94



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	346.35	37.0
0-30	593.09	63.3
0-40	743.33	79.4
0-60	885.41	94.5
0-80	927.42	99.0
0-90	929.93	99.3

SKU: LED-SL-SCP-4R-12W-5CCT-38D
LUMENS: 992
WATTAGE: 10.94
LER: 91
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.62 (0-180), 0.70 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	109.85	2.83
6'	48.88	4.25
8'	26.86	5.67
10'	17.33	7.08
12'	12.14	8.50



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	468.32	47.2
0-30	739.85	74.6
0-40	878.15	88.5
0-60	957.80	96.5
0-80	984.07	99.2
0-90	985.45	99.3

SKU: LED-SL-SCP-4R-12W-5CCT-24D
LUMENS: 994
WATTAGE: 10.93
LER: 91
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.42 (0-180), 0.58 (90-270)


Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	159.54	1.99
6'	70.91	2.99
8'	39.02	3.99
10'	25.06	4.99
12'	17.56	5.98



Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	535.15	53.8
0-30	748.74	75.3
0-40	856.14	86.1
0-60	951.14	95.7
0-80	985.39	99.2
0-90	986.73	99.3


4" LED Round Scoop Downlight

5-CCT Selectable

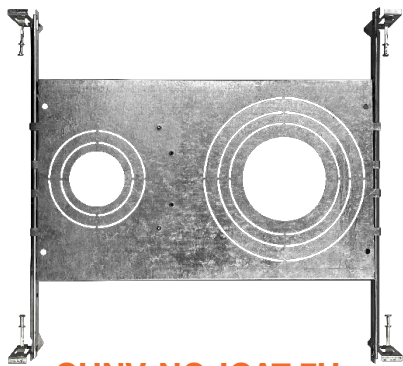

CUNV-NC-ICAT-7H

Universal Pre-Mounting Plate

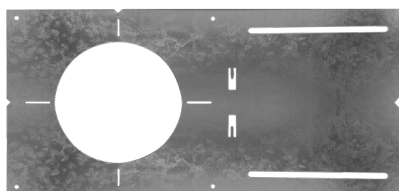

C4-JBX-RI

4" Rough In Plate



JBX-EXT

6'/10' Extension Cable



LED-EMB-25W-HV-0/10V-2P

Model	Voltage	Watts	Lumens	Color	CRI
LED-SL-SCP-4R-12W-5CCT-WH	120V	12w	900	27/30/35/40/50K	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable

BATTERY BACK-UP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures