

## 4" Regressed Downlight

### 5-CCT Selectable



Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

Canless Downlights



#### Detail Specifications:

- Finish: White Smooth
- IP54 Wet Location Rated
- Beam Angle: 38° standard
- Chip: COB Chip, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted, non-yellowing
- Average life (L70) of 50,000 hours

#### Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

#### Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Standard white round trim
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

#### Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

#### Mounting & Installation:

- Cut Out Dimension: 3-3/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

#### Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

#### Item

**LED-DLJBX-4RG-15W-5CCT-W/W-R** -   
15W • 1,100lm • 120V

#### Emergency

(Blank)

- No Emergency Backup
- EMB** Emergency Backup

#### Optional Accessories (Order Separately)

##### New Construction Plates

**CUNV-NC-ICAT-7H**  
Universal Plate with Hanging Bars  
**C4-JBX-RI**  
4" Rough in plate  
**CUNV-JBX-RI-XL**  
Universal Rough In Plate Extra Long

##### Extension Cables

**JBX-EXT-6'-TRI**  
6' Extension  
**JBX-EXT-10'-TRI**  
10' Extension

##### Emergency Backup (field install) 1

**LED-EMB-25W-HV**  
**-0/10V-2P**  
Up to 24W fixtures

1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.


## 4" Regressed Downlight

5-CCT Selectable

### FEATURES






### DIMENSIONS

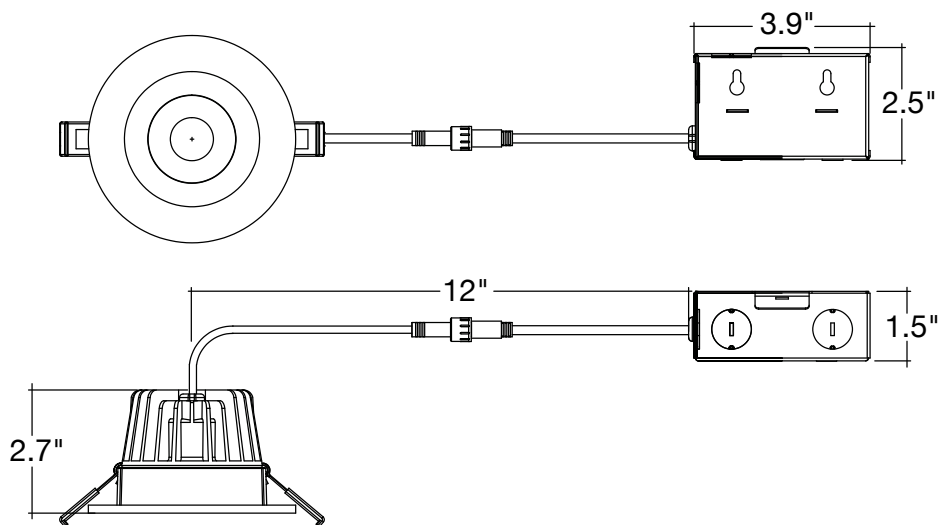

# 4" Regressed Downlight

## 5-CCT Selectable

### ACCESSORIES

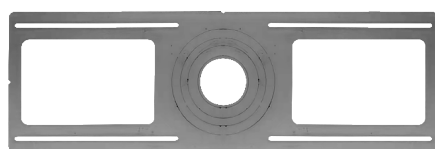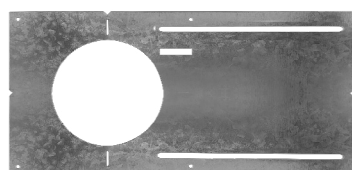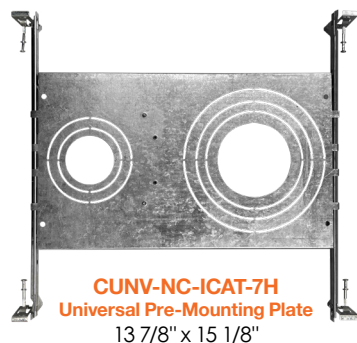

| Model                        | Voltage | Watts | Lumens | Color           | CRI |
|------------------------------|---------|-------|--------|-----------------|-----|
| LED-DLJBX-4RG-15W-5CCT-W/W-R | 120V    | 15w   | 1100   | 27/30/35/40/50K | >90 |

### CONSTRUCTION PLATES

| Accessory       | Description                                                          |
|-----------------|----------------------------------------------------------------------|
| CUNV-NC-ICAT-7H | 1" 2" 3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate |
| C4-JBX-RI       | 4" Rough In Plate                                                    |
| CUNV-JBX-RI-XL  | Universal tough in plate (Extra Long)                                |

### EXTENSION CABLE

| Accessory       | Description         |
|-----------------|---------------------|
| JBX-EXT-6'-TRI  | 6" Extension Cable  |
| JBX-EXT-10'-TRI | 10" Extension Cable |

### BATTERY BACK-UP

| Accessory               | Description        |
|-------------------------|--------------------|
| LED-EMB-25W-HV-0/10V-2P | Up to 24W fixtures |

### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.  
Please contact us for more information.

#### TRIAC/ELV Dimmers

| Lutron     |            | Leviton | Legrand   | Cooper |
|------------|------------|---------|-----------|--------|
| AYCL-153P  | NTELV-300P | 6633    | ADTP703TU | 9540   |
| DV-600PR   | S-600P     | 6674    | H703PTW   | DAL06P |
| DVCL-153P  | CT-600P    | 6602    |           |        |
| MACL-153MH | CTCL-153P  | IPL06   |           |        |
| MRF2-6CL   | TG-600P    |         |           |        |
| D-600P     | TCCL-153P  |         |           |        |