




4" Trimless Multiple Head Downlights

5-CCT Selectable

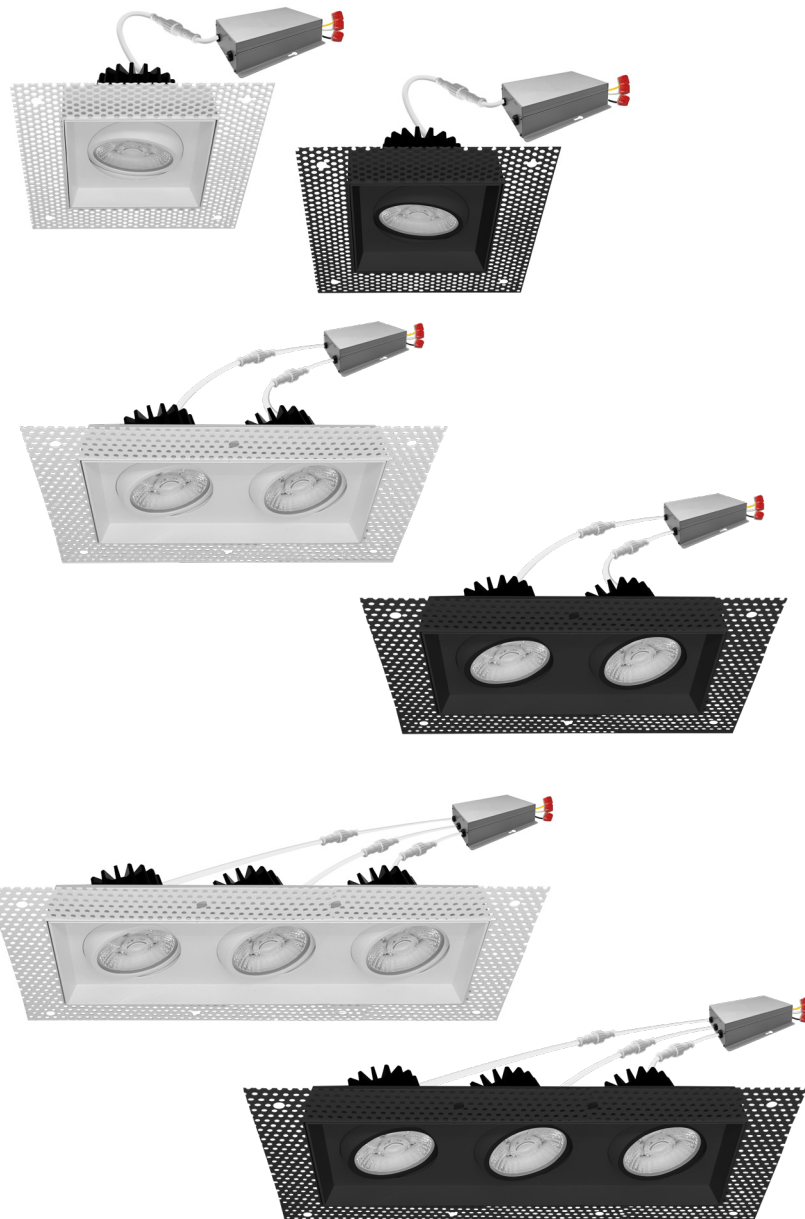

Detail Specification:

- Finish: White & Black
- Wet Location Rated
- Beam Angle: 20° Standard, 38° & 60° available
- Chip: COB, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

Applications

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT: 27/30/35/40/50K COB LED Chip
- Available in single, double, or triple head
- Metal housing and trim for better heat dissipation
- 360° Rotation and 30° Tilt gimbal light source
- Standard white round trim included: optional trims available
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable (Standard)
- 0/10V: 120-277V 0-10V Dimmable Custom Order
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installations:

- Cut Out Dimensions
 - Single Head: check the packaging you made
 - Double Head: check the packaging you made
 - Triple Head: check the packaging you made
- Optional new construction plate available
- This fixture does not fit into a recessed can
- Can be removed from below the ceiling for service or replacement while mud-in plate remains in the ceiling
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Finish	Beam Angle	Emergency	Driver
LED-SQM1-TML-4-15W-5CCT Single Head	WH White	20 20°	EMB Emergency Backup	(Blank) 120V Triac Dim
LED-SQM2-TML-4-30W-5CCT Double Head	BLK Black	38°¹ 38°		0/10V² 120-277V
LED-SQM3-TML-4-45W-5CCT Triple Head		60°¹ 60°		Dimmable

1. 20DG Standard Quick ship. 2. Custom order only
Other beam angles require production, 5-7 day lead time.

Optional Accessories (Order Separately)


Emergency Backup ¹	New Construction Plate
☐	☐

LED-EMB-25W CUNV-SQM
-HV-0/10V-2P -TML-NC-ICAT
Connects to one module New Construction Plate


1. Field installable.
Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.

FEATURES

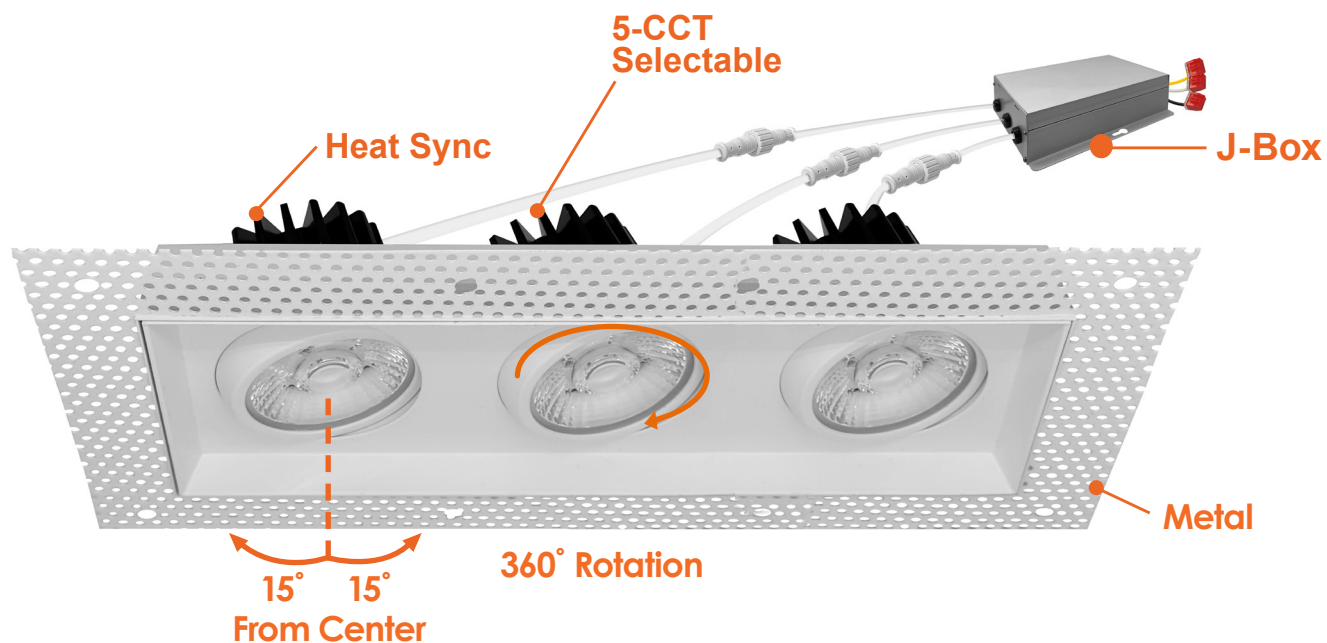

DIMENSIONS

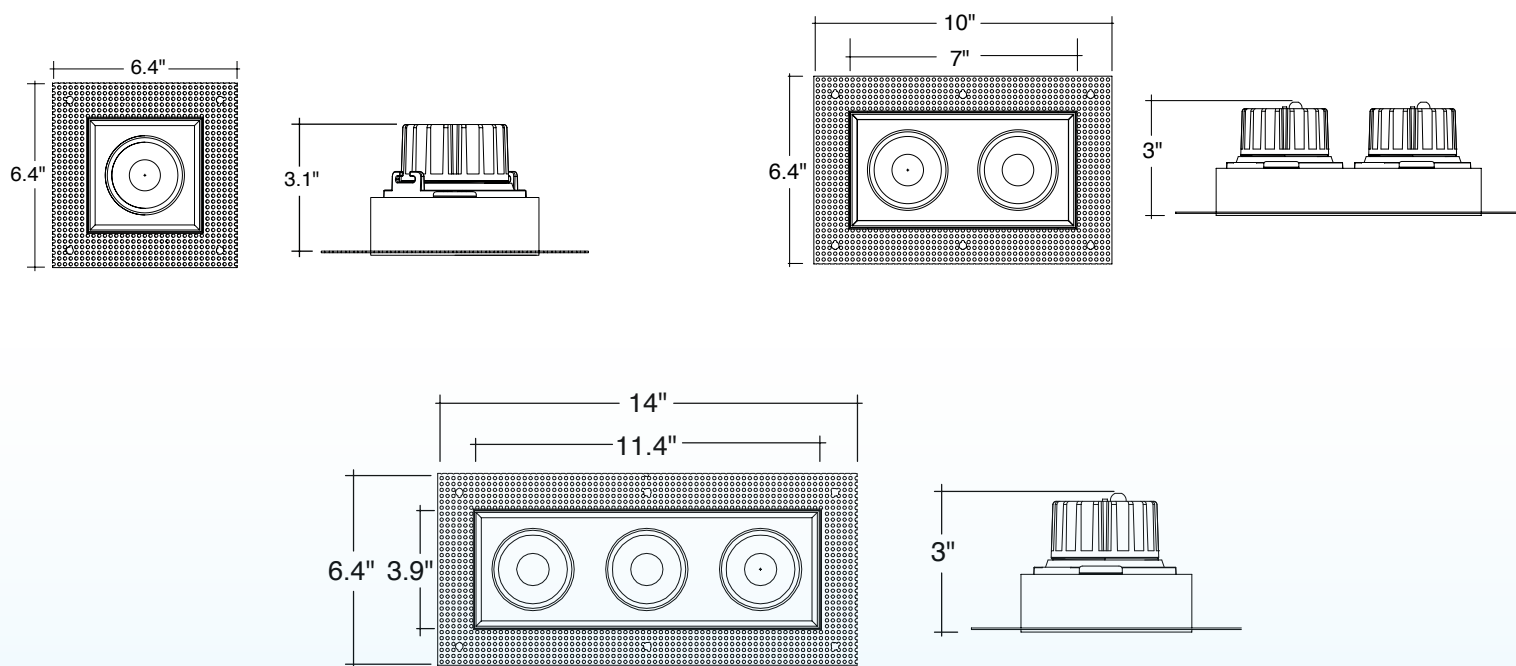

4" Trimless Multiple Head Downlights

5-CCT Selectable

ACCESSORIES



CUNV-SQM-TML-NC-ICAT



20 / 38 / 60



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-25W-HV-0/10V-2P

Model	Voltage	Watts	Lumens	Color	CRI
LED-SQM1-TML-4-15W-5CCT-WH	120/277V	15w	1000	50/40/35/30/27K	>90
LED-SQM1-TML-4-15W-5CCT-BLK	120/277V	15w	1000	50/40/35/30/27K	>90
LED-SQM2-TML-4-30W-5CCT-WH	120/277V	30w	2000	50/40/35/30/27K	>90
LED-SQM2-TML-4-30W-5CCT-BLK	120/277V	30w	2000	50/40/35/30/27K	>90
LED-SQM3-TML-4-45W-5CCT-WH	120/277V	45w	3000	50/40/35/30/27K	>90
LED-SQM3-TML-4-45W-5CCT-BLK	120/277V	45w	3000	50/40/35/30/27K	>90

CONSTRUCTION PLATE

Accessory	Description
CUNV-SQM-TML-NC-ICAT	New Construction Plate: SQM Fixtures

TRACK HEAD

Accessory	Description
20	Track Head: 20D Optic
38	Track Head: 38D Optic
60	Track Head: 60D Optic

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

BATTERY BACK-UP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested.
Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU
DV-600PR	S-600P	6674	H703PTW
DVCL-153P	CT-600P	6602	DAL06P
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		