


Test Time: 2021/2/6 星期六 10:01

Luminaire Property

Inspector:


Luminous Intensity Distribution Curve

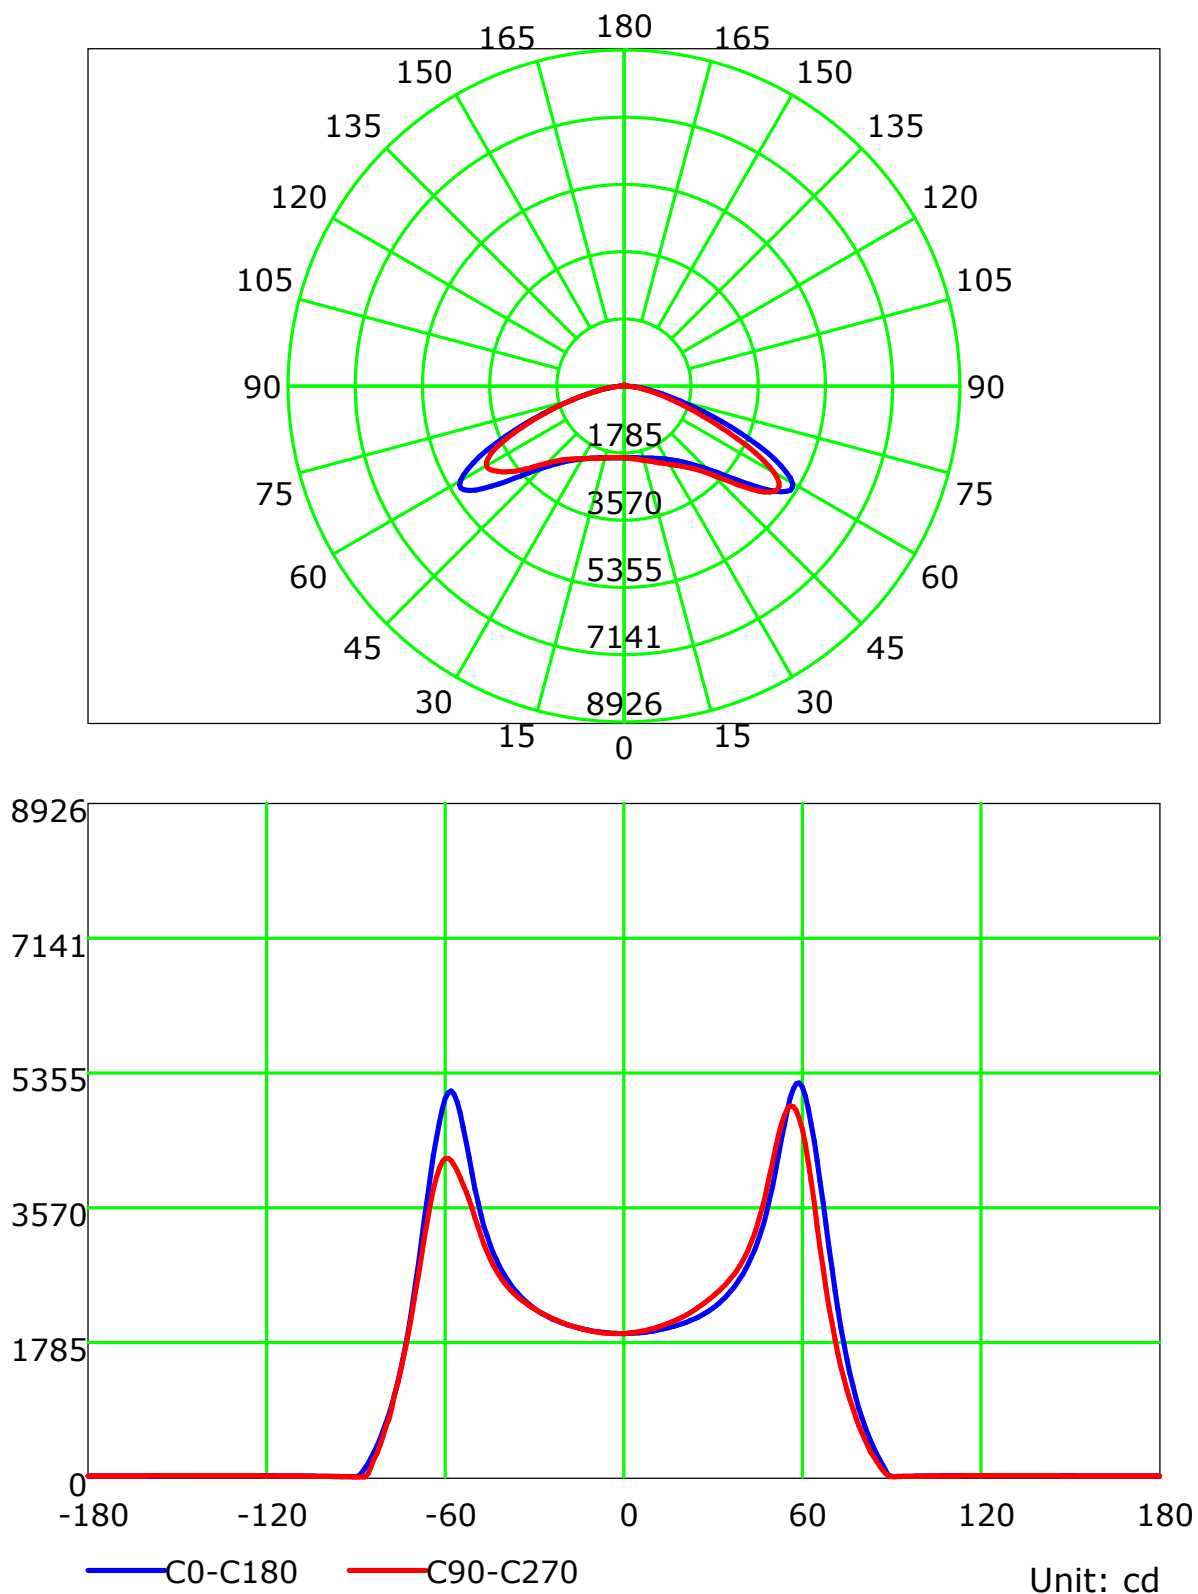

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

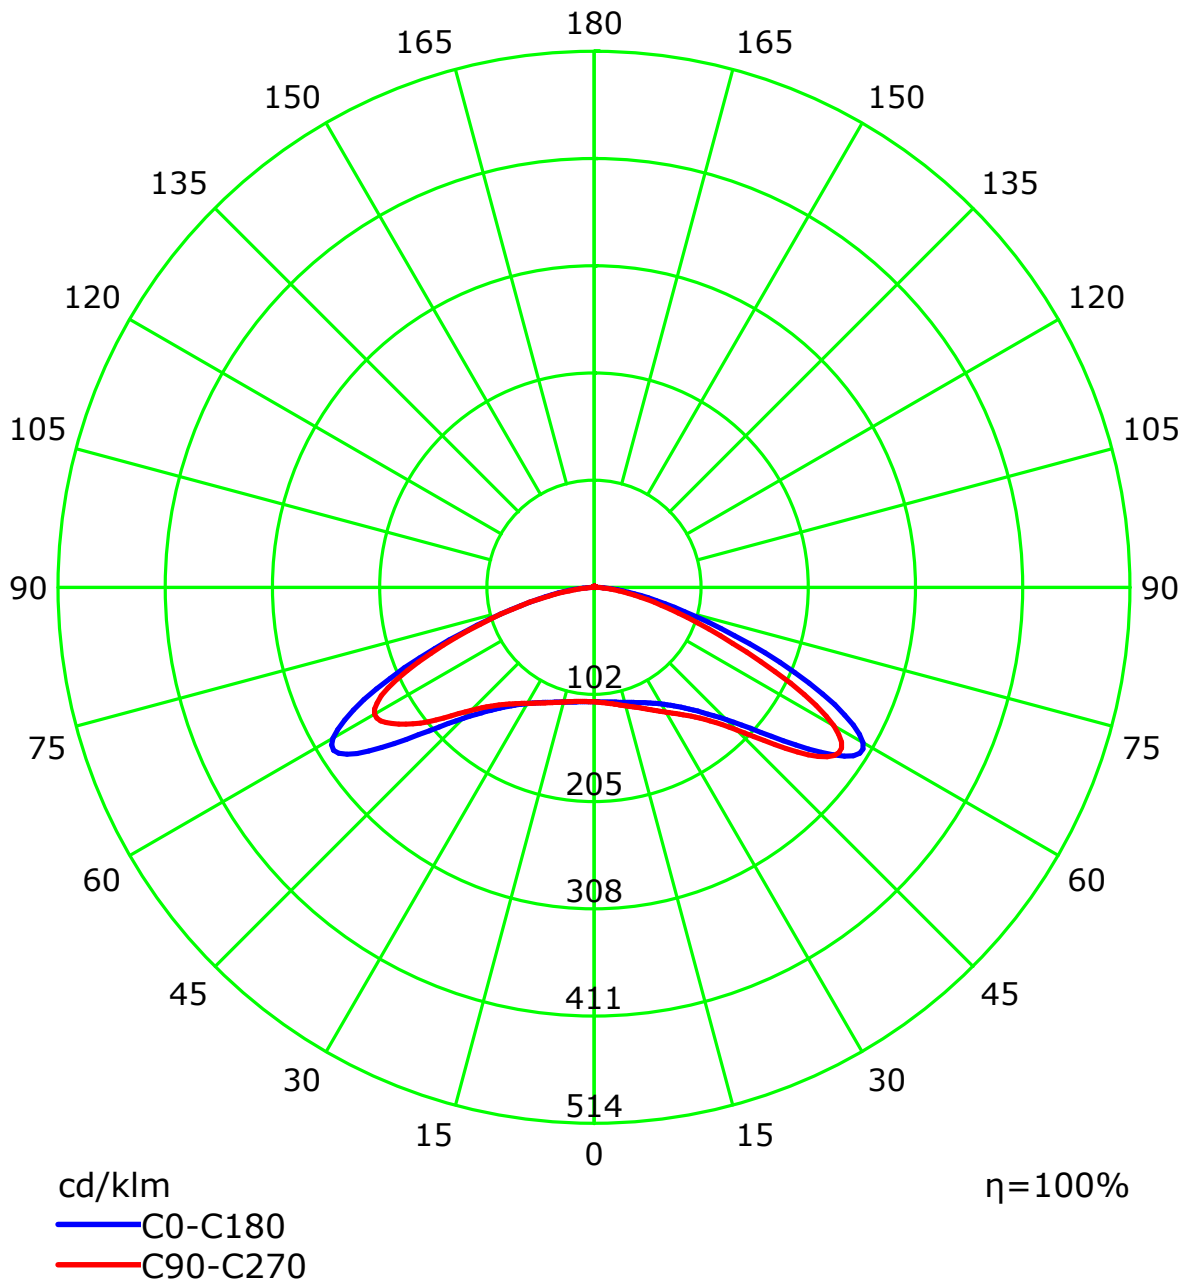


C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	105	99	93	88	102	96	91	86	92	87	84	88	84	81	84	81	78	76
2	92	81	72	65	89	79	71	64	75	68	62	72	66	61	68	64	59	57
3	81	68	57	49	78	66	56	49	63	54	48	60	53	47	57	51	46	43
4	73	58	47	38	70	56	46	38	53	44	37	51	43	36	48	41	36	33
5	65	50	39	31	63	48	38	30	46	37	30	44	36	29	42	35	29	26
6	59	43	33	25	57	42	32	25	40	31	24	38	30	24	37	29	24	21
7	54	38	28	21	52	38	28	21	36	27	20	34	26	20	33	25	20	18
8	50	34	25	18	48	34	24	18	32	24	17	31	23	17	29	22	17	15
9	47	31	22	15	45	31	21	15	29	21	15	28	20	15	27	20	15	13
10	43	28	19	13	42	28	19	13	27	19	13	26	18	13	25	18	13	11


Spacing Criteria (0-180): 2.72
Spacing Criteria (90-270): 2.57
Spacing Criteria (Diagonal): 3.12

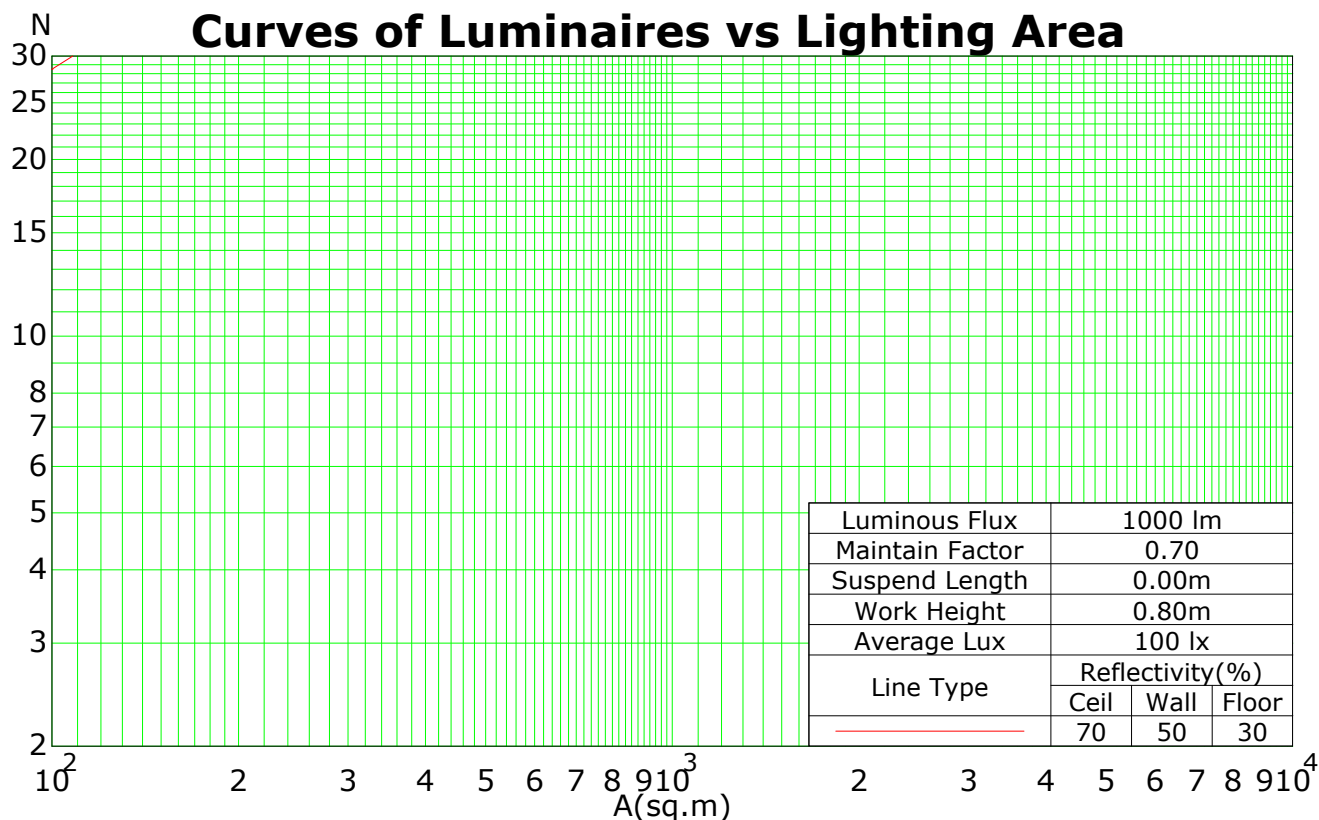

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Isocandela (rectangle)

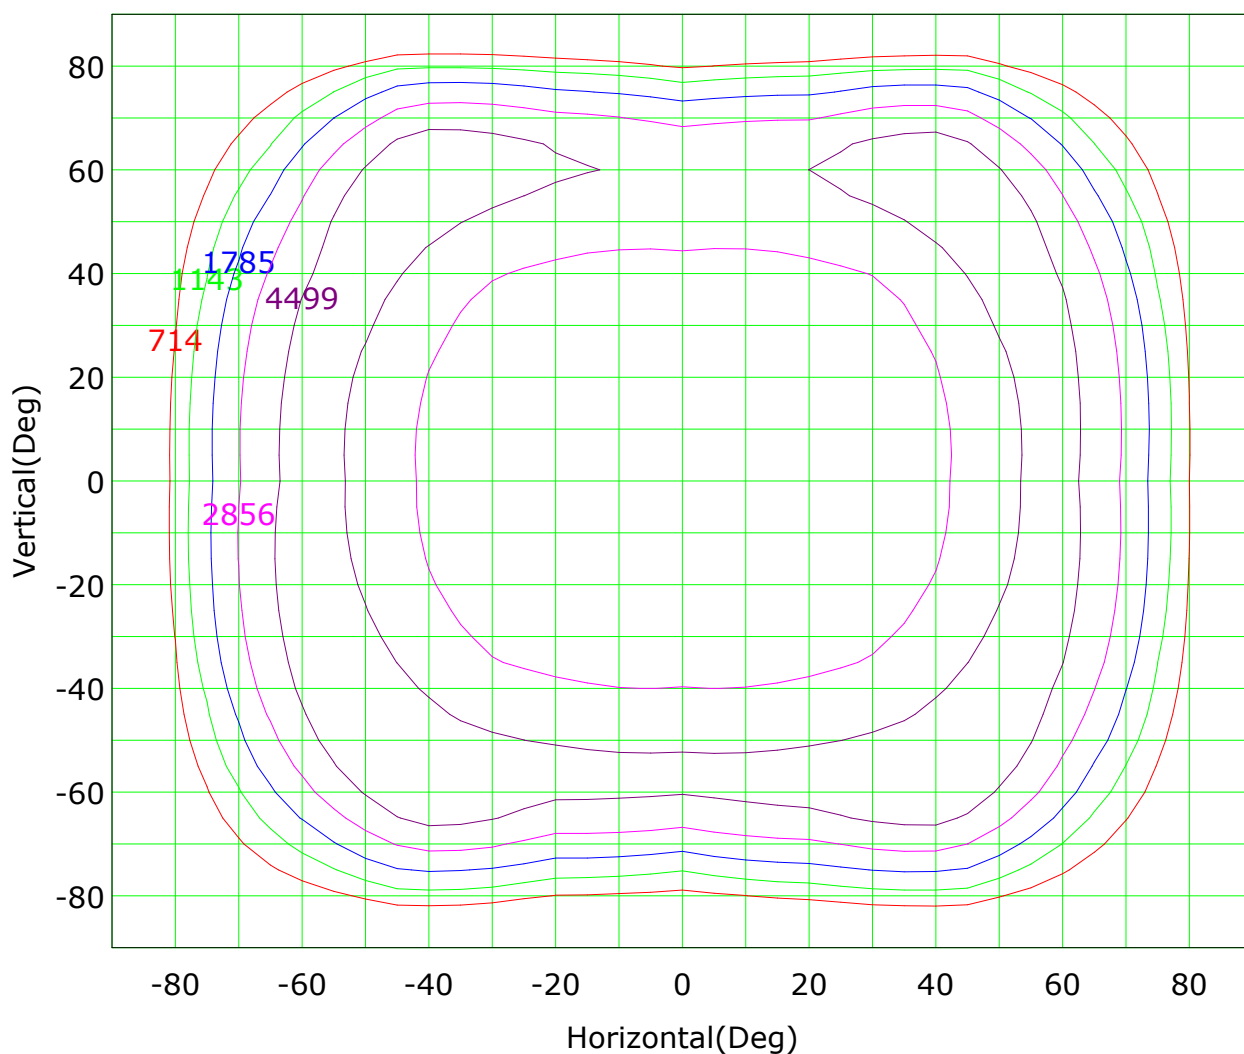

Imax (100%): 7141 cd

(10%): 714 cd	(16%): 1143 cd
(25%): 1785 cd	(40%): 2856 cd
(63%): 4499 cd	(100%): 7141 cd

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Isocandela (sphere)

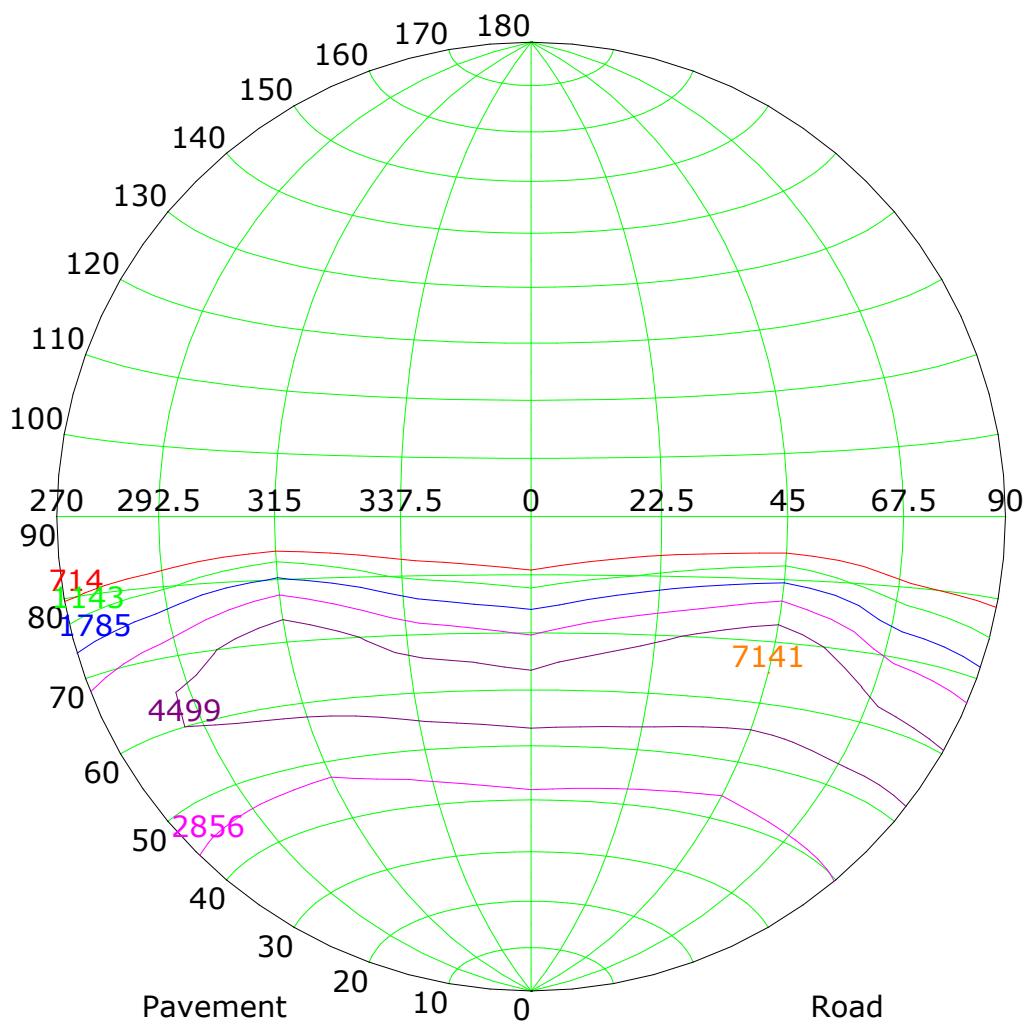

Imax (100%): 7141 cd

(10%): 714 cd	(16%): 1143 cd
(25%): 1785 cd	(40%): 2856 cd
(63%): 4499 cd	(100%): 7141 cd

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

IsoLux Plot

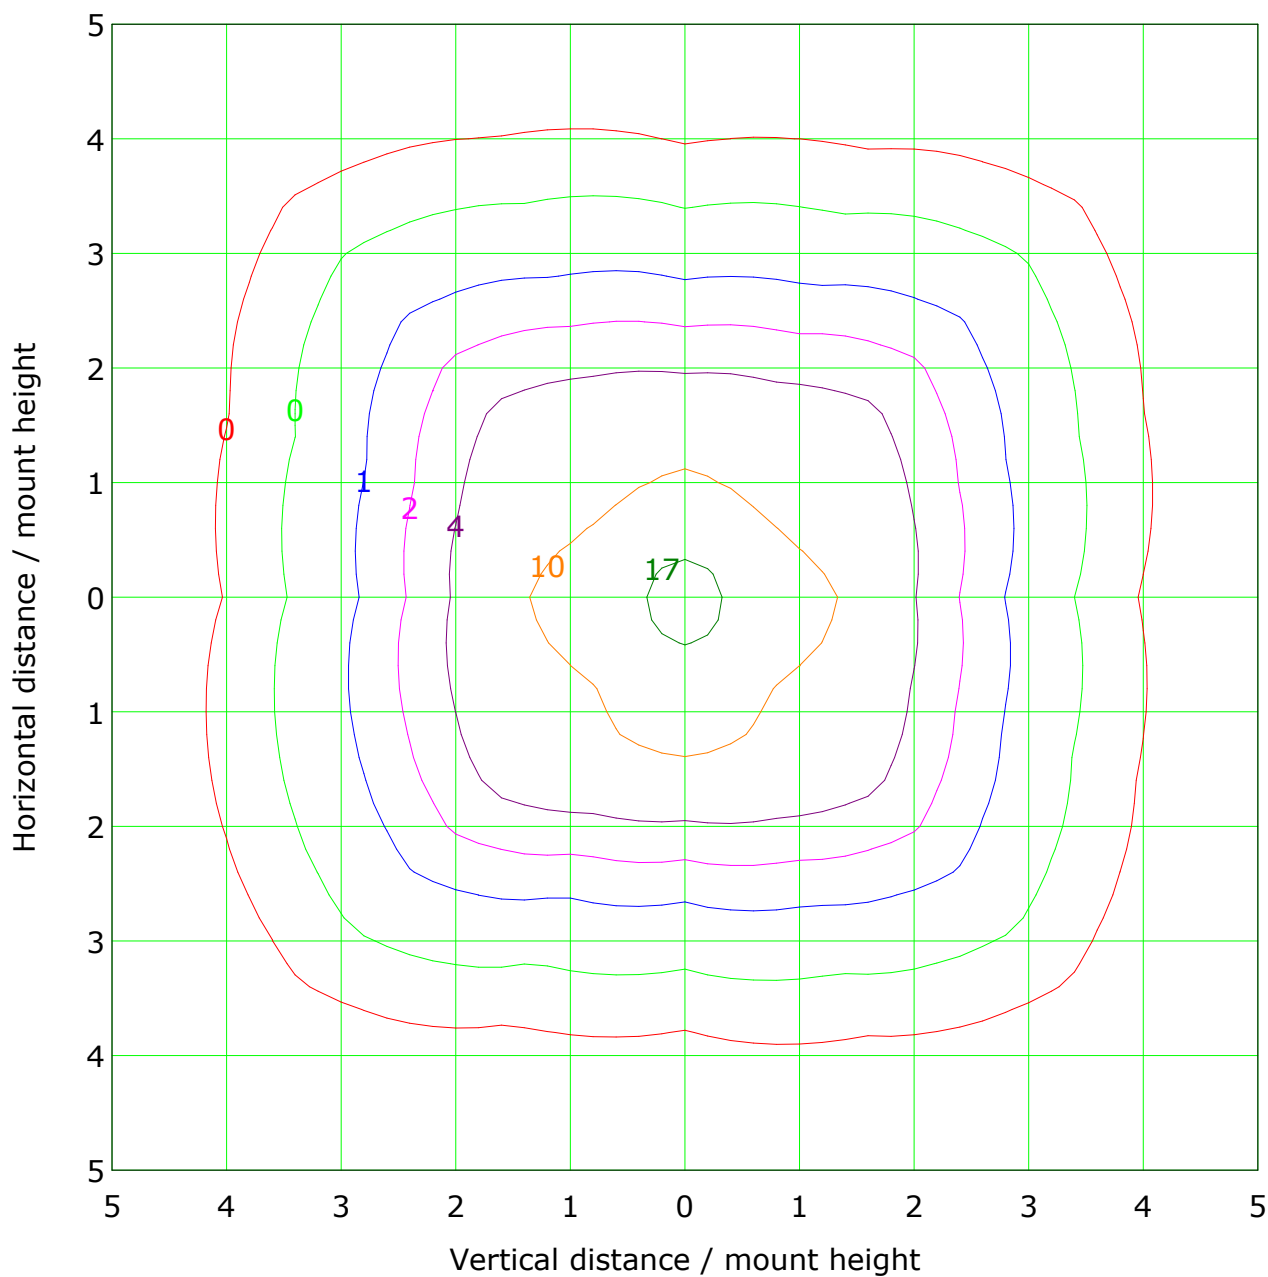


Mounting Height: 10.0m Max Lux(100%): 19.1 lx	
(1%): 0.2 lx	(2%): 0.4 lx
(5%): 1.0 lx	(10%): 1.9 lx
(20%): 3.8 lx	(50%): 9.6 lx
(90%): 17.2 lx	(100%): 19.1 lx

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)

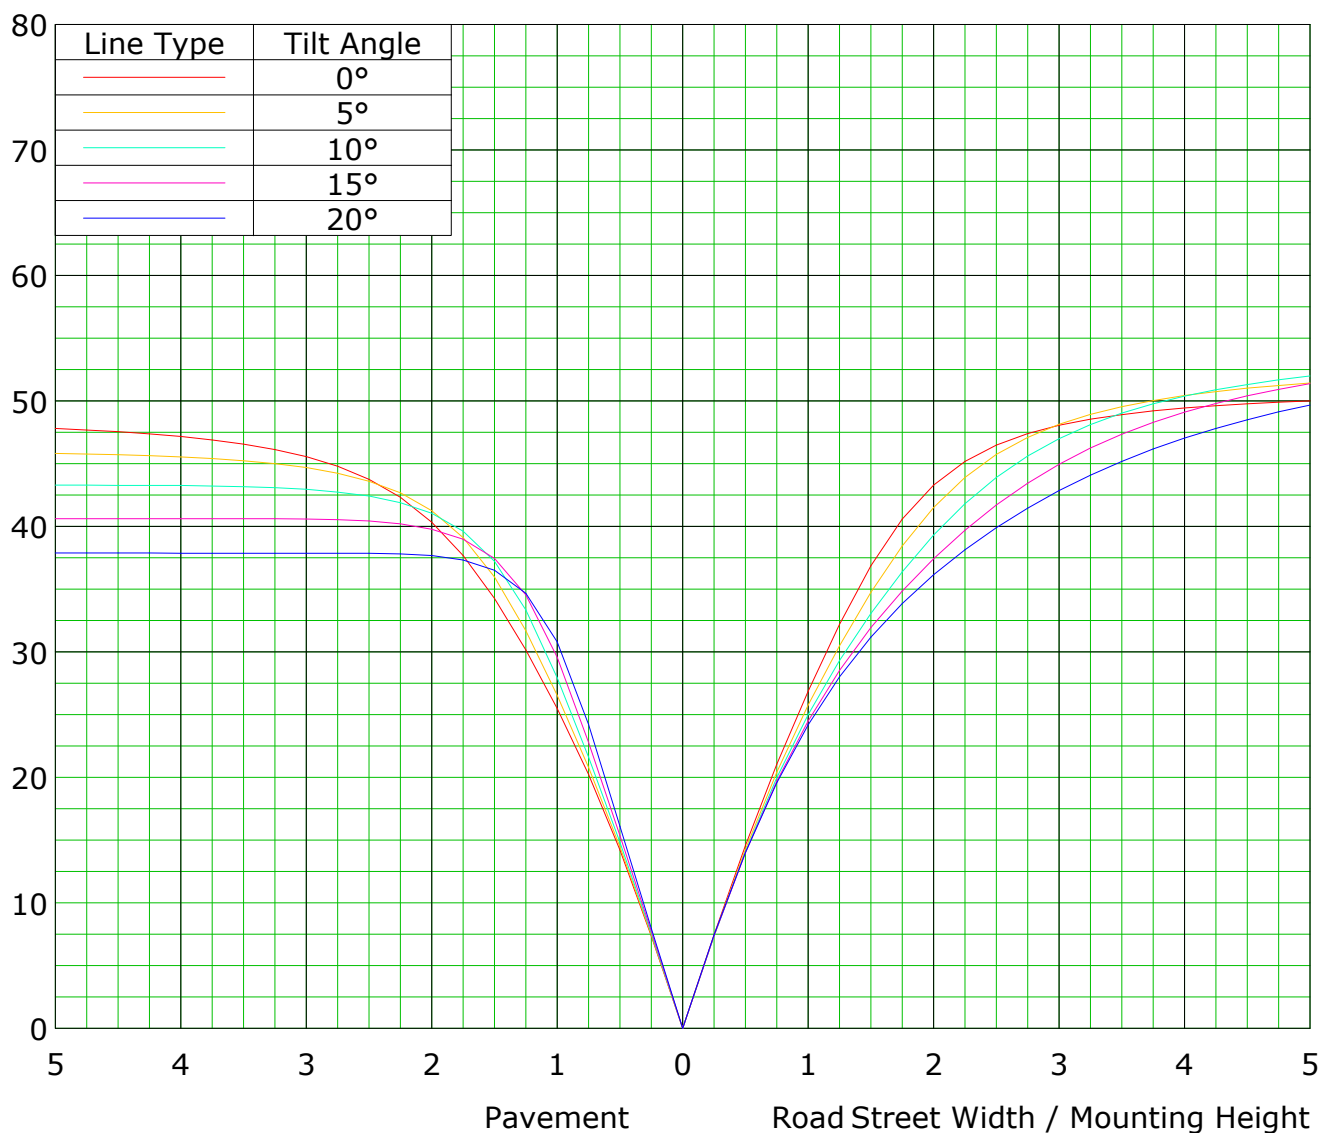

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

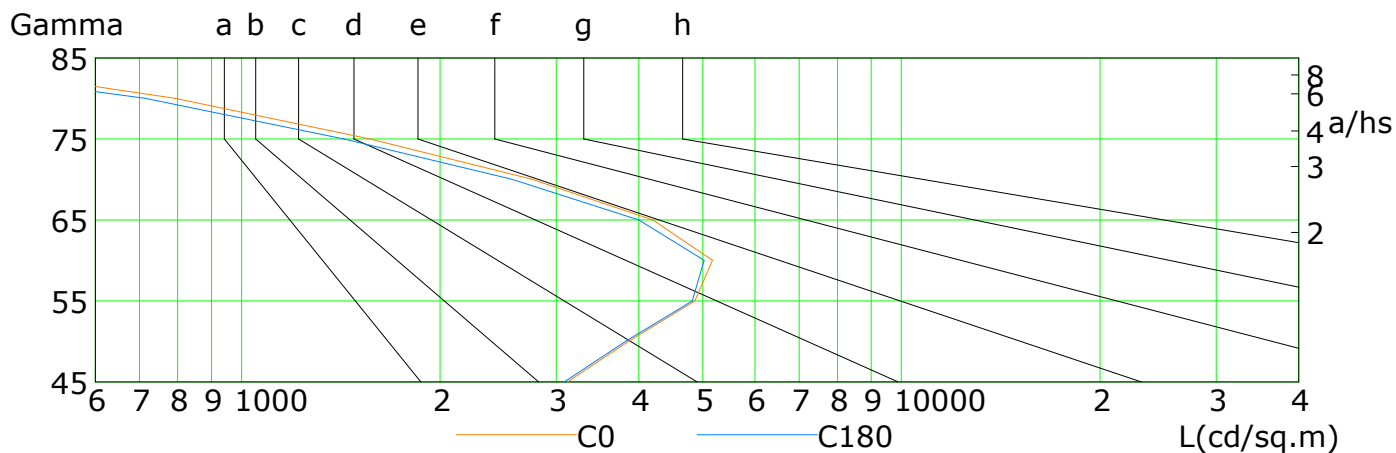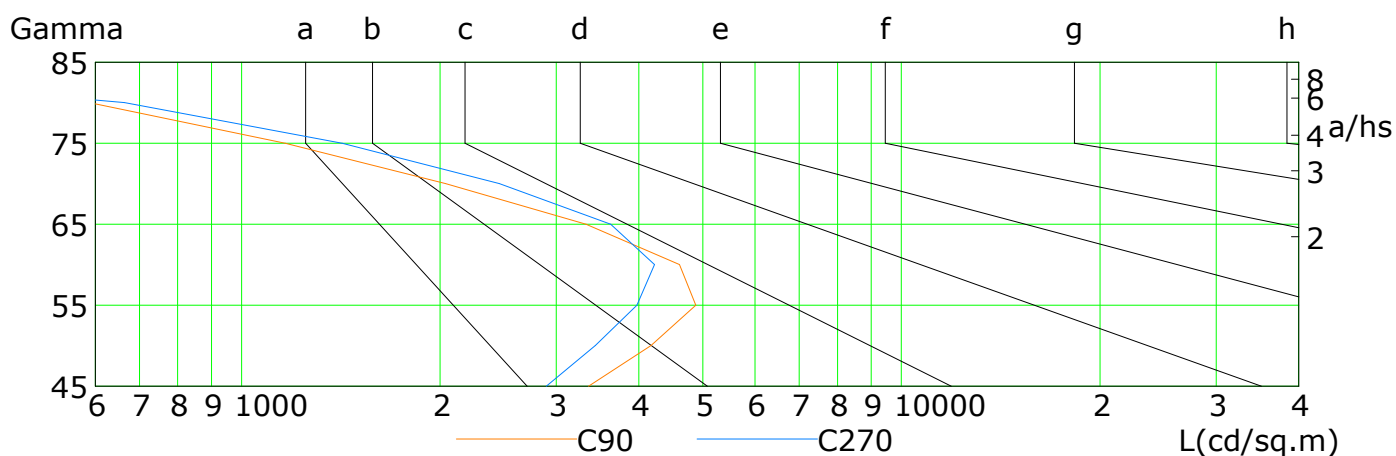

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	3117	3859	4866	5173	4202	2758	1566	793	312
C90	3355	4174	4882	4612	3327	2037	1164	589	214
C180	3084	3820	4822	5023	4000	2570	1429	715	256
C270	2898	3437	3973	4224	3627	2459	1421	664	137

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 8.190 m


Humidity:

Inspector:


Illuminance at a Distance(Beam Angle)

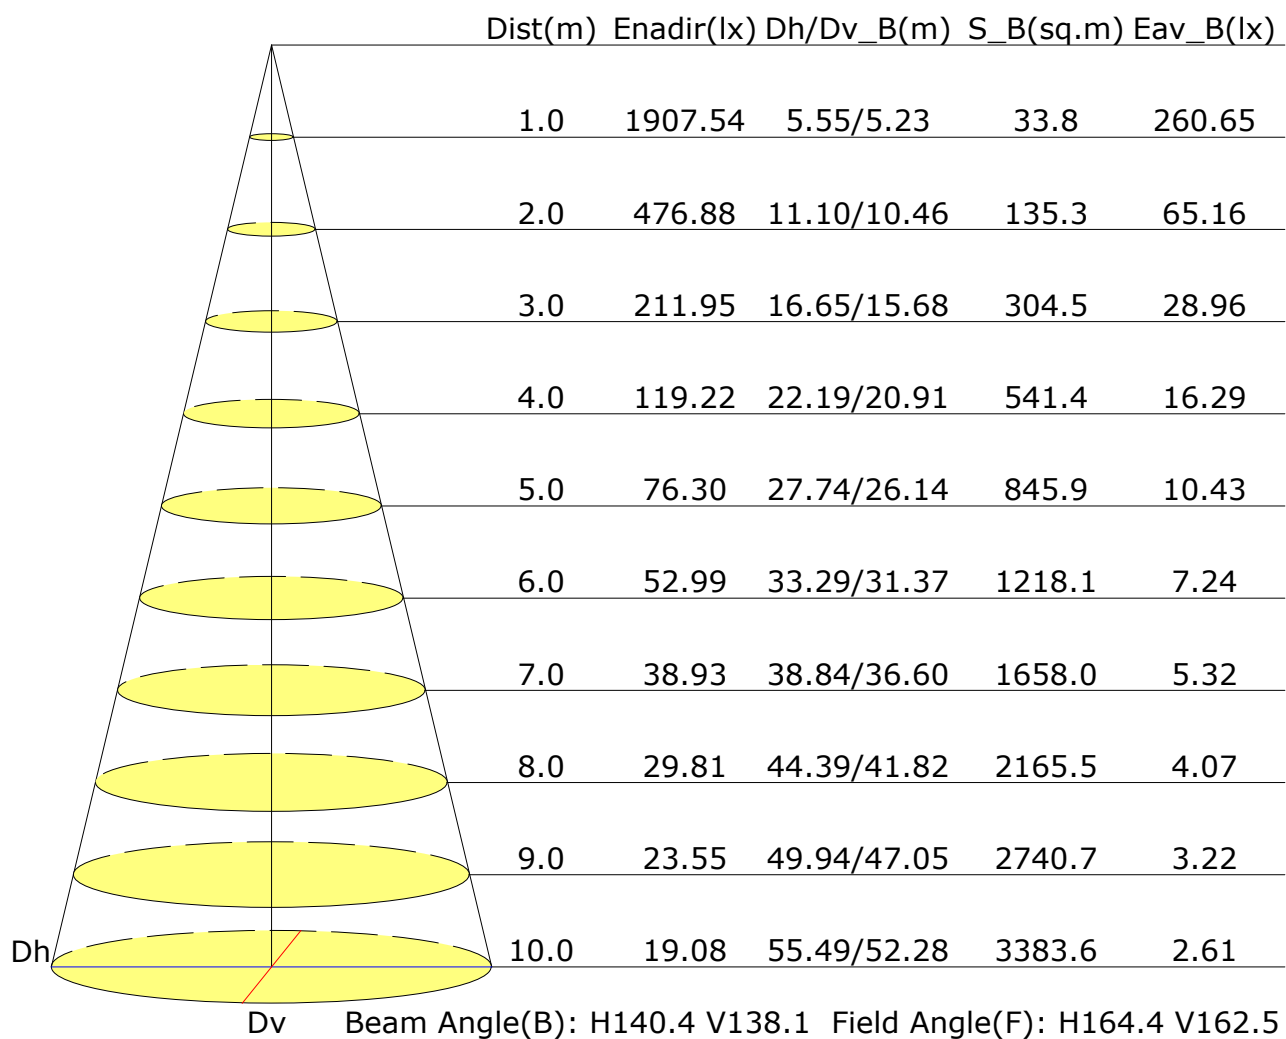

Illuminance at a Distance(Field Angle)

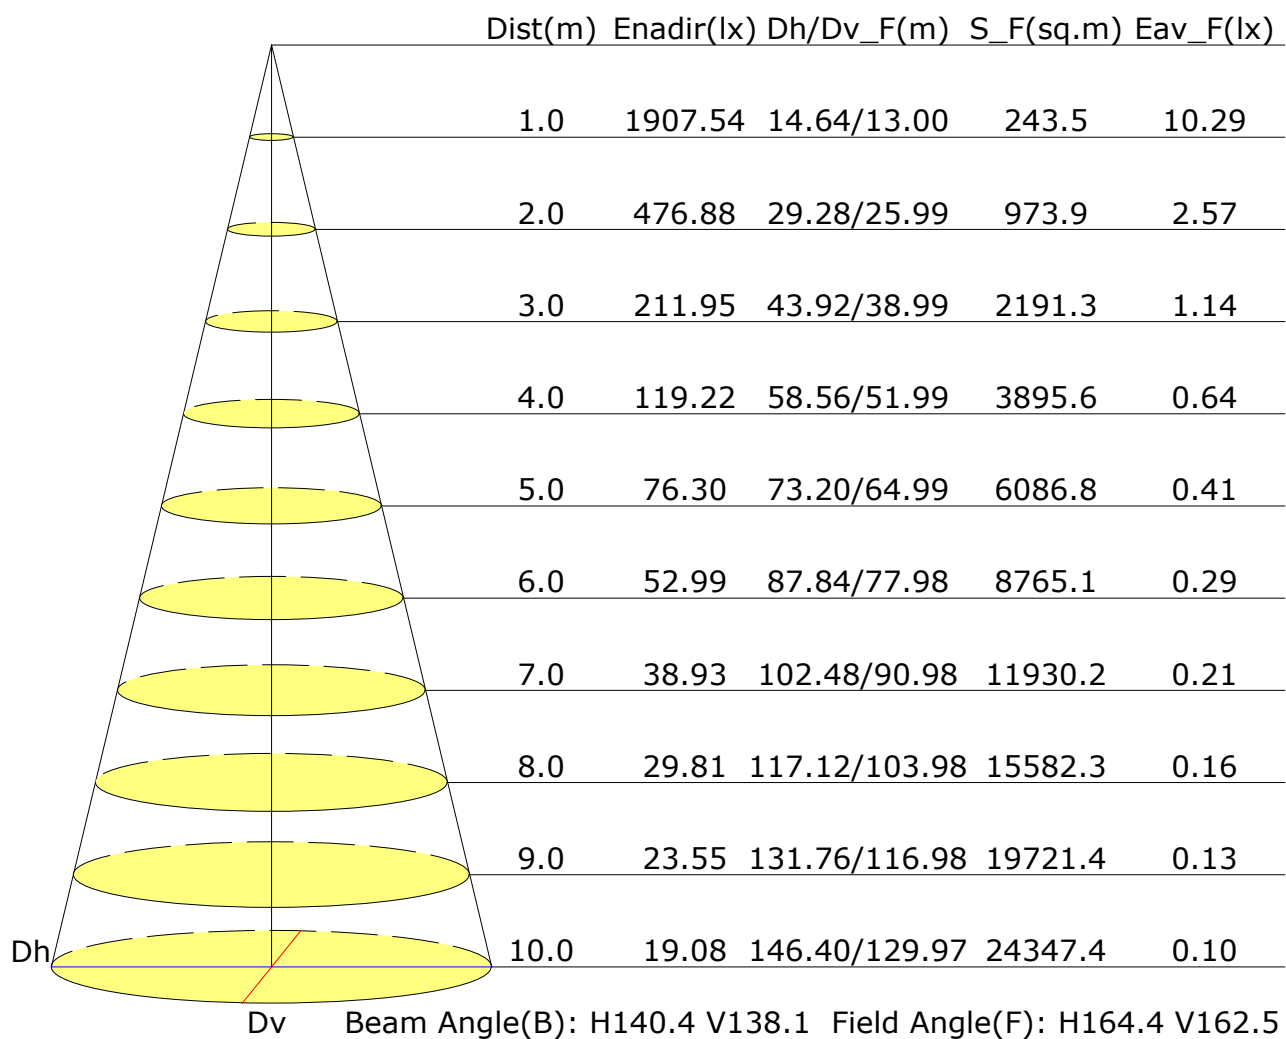

Vertical IsoLux Plot

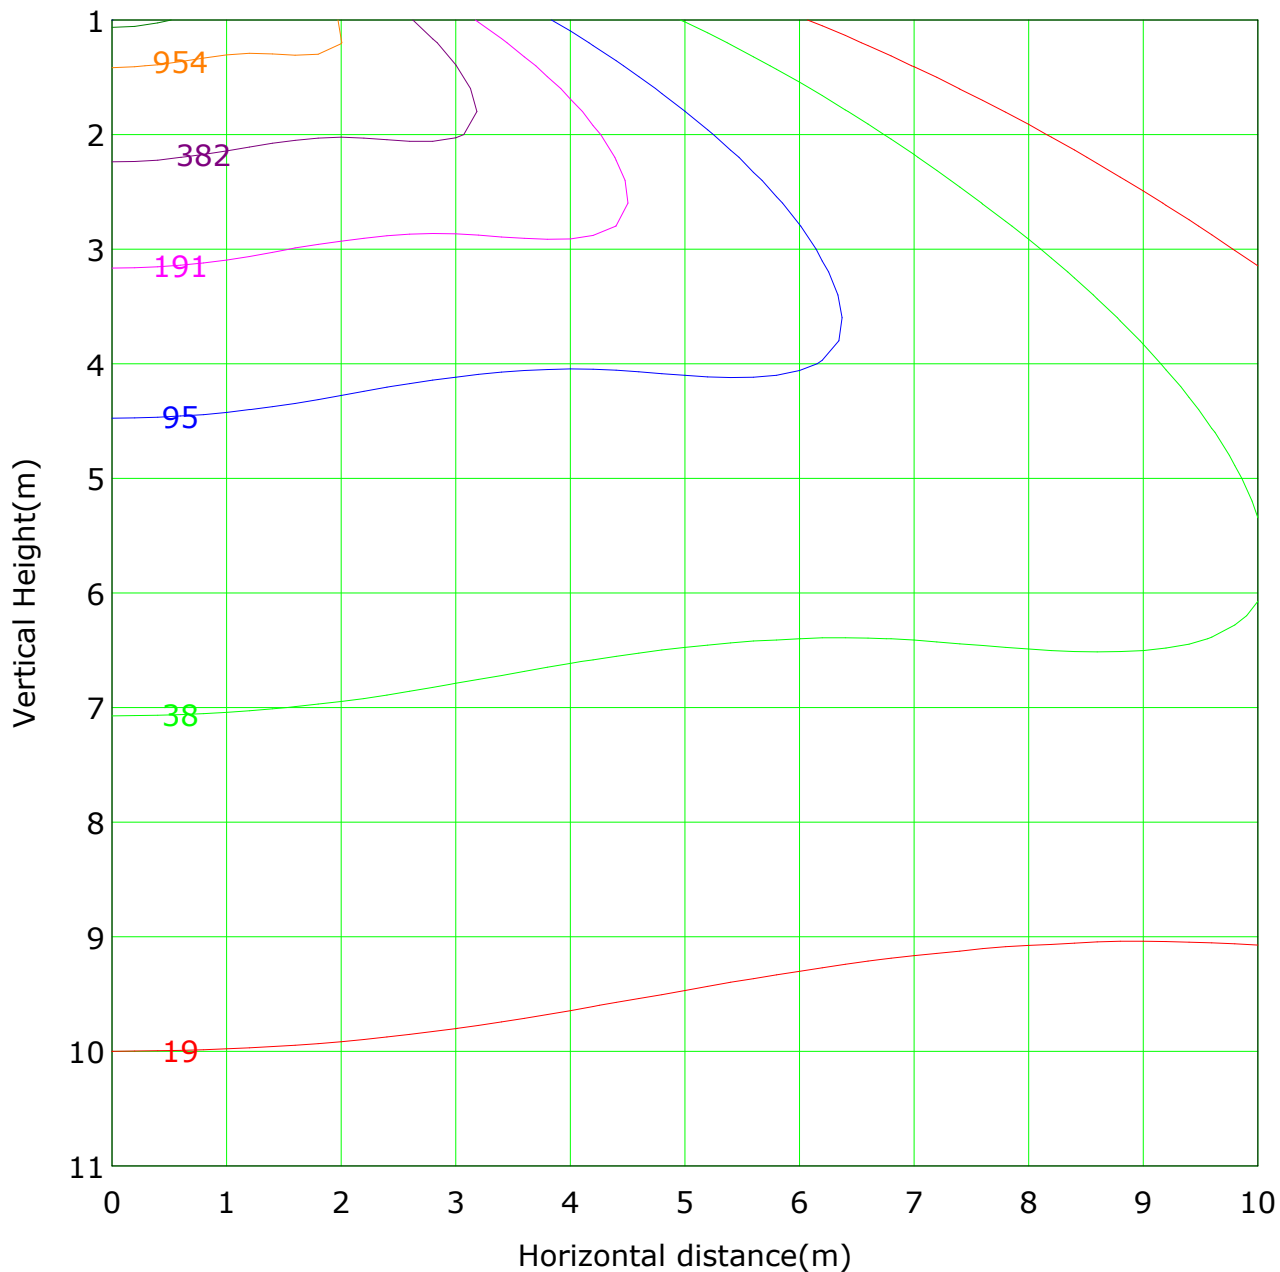

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 1907.5 lx

(1%): 19.1 lx	(2%): 38.2 lx
(5%): 95.4 lx	(10%): 190.8 lx
(20%): 381.5 lx	(50%): 953.8 lx
(90%): 1716.8 lx	(100%): 1907.5 lx

C Plane (°): 0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Area Flux Table

Unit: lm


Vertical plane	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
Flux(T)	12.0	137.3	562.0	1131.6	1383.1	1385.1	1324.0	1307.2	1298.1	1299.1	1310.2	1331.7	1402.0	1408.9	166.3	596.0	150.6	14.1	17219
Flux(E)	0.0	118.6	547.6	1120.0	1372.7	1374.6	1310.1	1292.1	1282.0	1282.7	1295.6	1318.4	1390.7	1399.0	154.9	582.2	133.0	1.6	16976
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
	0.1	0.6	1.8	4.0	7.3	8.8	8.3	7.8	7.0	7.3	8.7	9.4	9.5	7.8	4.4	2.0	0.7	0.1	95.4
	0.2	2.1	7.8	20.3	41.7	53.0	51.2	49.2	47.2	49.1	54.4	56.9	56.4	43.2	20.8	8.0	2.3	0.2	564.0
	0.4	4.1	15.7	45.6	97.7	123.1	115.8	111.5	110.3	112.9	119.5	125.2	128.7	100.3	45.7	15.5	4.3	0.5	1276.7
	0.6	6.2	25.4	72.6	126.4	133.1	120.7	118.2	119.1	119.5	119.9	124.1	136.4	127.1	71.3	24.5	6.4	0.7	1452.1
	0.7	8.4	35.8	86.5	108.5	93.2	87.4	87.0	88.3	88.4	87.4	88.5	95.4	109.6	84.4	34.4	8.6	0.9	1193.3
	0.9	10.5	44.5	89.2	88.3	73.1	70.1	70.9	71.9	72.2	71.5	71.0	74.6	90.0	88.5	43.6	10.7	1.0	1042.5
	1.0	12.0	49.8	86.2	75.1	65.3	63.4	63.9	64.6	64.7	64.3	63.9	66.2	76.7	86.9	49.9	12.5	1.1	967.7
	1.1	12.9	52.2	82.2	68.5	61.6	60.0	60.0	60.3	60.3	60.2	60.2	61.9	69.6	83.4	53.3	13.5	1.2	922.5
	1.1	12.9	52.2	80.8	66.8	60.2	58.6	58.3	58.2	58.3	58.4	58.7	60.5	67.5	82.0	54.3	13.8	1.2	904.1
	1.1	12.8	52.2	81.5	67.5	60.8	59.1	58.9	58.9	58.9	59.0	59.2	61.0	68.0	82.6	55.1	14.1	1.3	912.0
	1.1	12.6	51.8	84.1	71.0	63.5	61.9	62.0	62.3	62.2	61.8	61.8	63.6	71.2	85.5	55.8	14.1	1.2	947.6
	1.0	11.6	48.8	88.5	80.0	69.5	67.6	68.0	68.5	68.4	67.6	67.2	69.4	79.9	91.4	54.1	13.3	1.2	1016.1
	0.9	10.0	42.7	90.5	96.4	81.1	77.5	78.1	78.9	78.8	77.9	77.3	80.8	96.9	96.9	49.0	11.6	1.1	1126.3
	0.7	8.0	33.6	86.0	119.6	108.7	102.1	101.0	102.4	102.7	101.9	102.7	108.9	122.8	95.2	39.8	9.4	0.9	1346.4
	0.6	5.9	23.5	68.9	131.5	151.4	144.1	143.4	143.2	143.0	141.9	141.5	151.7	137.4	76.8	28.2	7.0	0.7	1640.6
	0.4	3.9	14.6	41.6	91.5	120.7	118.9	114.6	108.2	105.5	106.6	111.7	120.4	94.7	45.5	17.2	4.7	0.5	1221.1
	0.2	2.1	7.4	18.6	37.4	48.1	47.4	44.8	40.6	39.2	40.9	43.6	47.1	38.1	20.2	8.8	2.6	0.3	487.3
	0.1	0.6	2.1	4.6	8.1	9.9	9.9	9.3	8.1	7.8	8.4	8.8	9.4	8.1	5.0	2.5	0.8	0.1	103.6
	0.1	0.6	2.1	4.6	8.1	9.9	9.9	9.3	8.1	7.8	8.4	8.8	9.4	8.1	5.0	2.5	0.8	0.1	103.6

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

The Average Illuminance Effective Figure

Flux Out: 14371.65lm

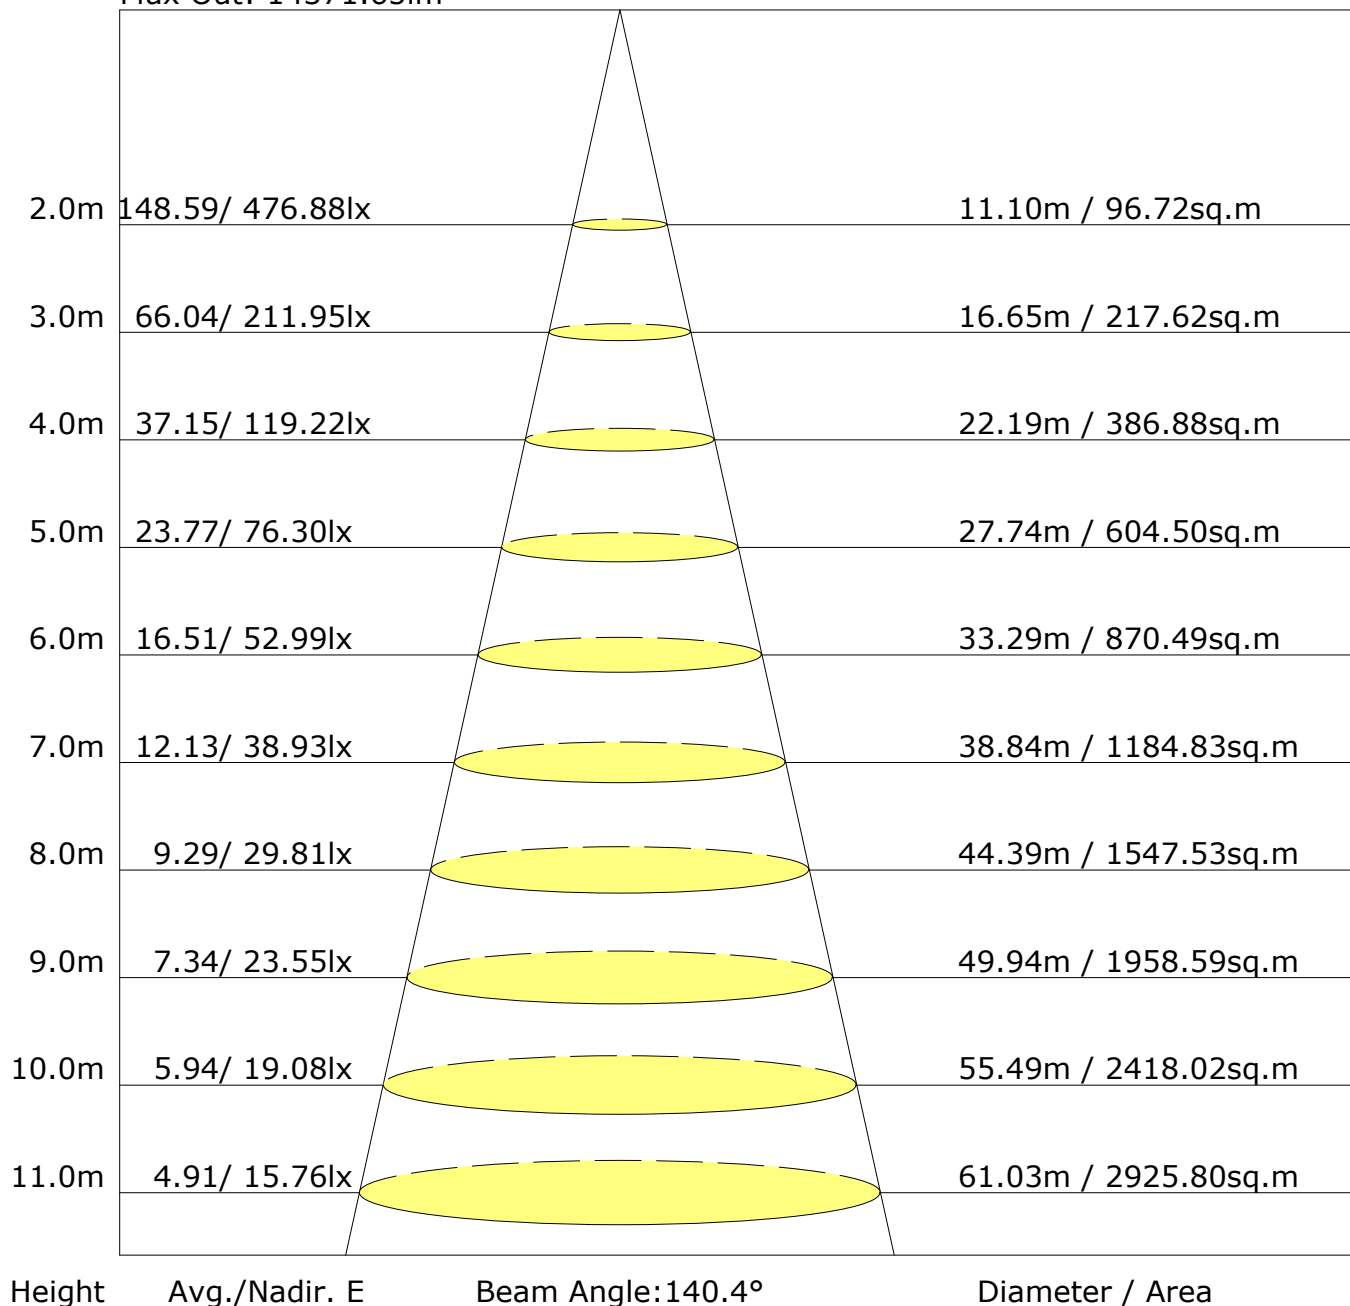

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	8802	50.7
	FL (0°-30°)	887	5.1
	FM (30°-60°)	4084	23.5
	FH (60°-80°)	3593	20.7
	FVH (80°-90°)	238	1.4
	BACK LIGHT	8419	48.5
	BL (0°-30°)	862	5.0
	BM (30°-60°)	3708	21.4
	BH (60°-80°)	3614	20.8
	BVH (80°-90°)	235	1.4
	UP LIGHT	130	0.7
	UL (90°-100°)	16	0.1
	UH (100°-180°)	114	0.7
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B4 U5 G4
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B4 U5 G2

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

LCS Graph

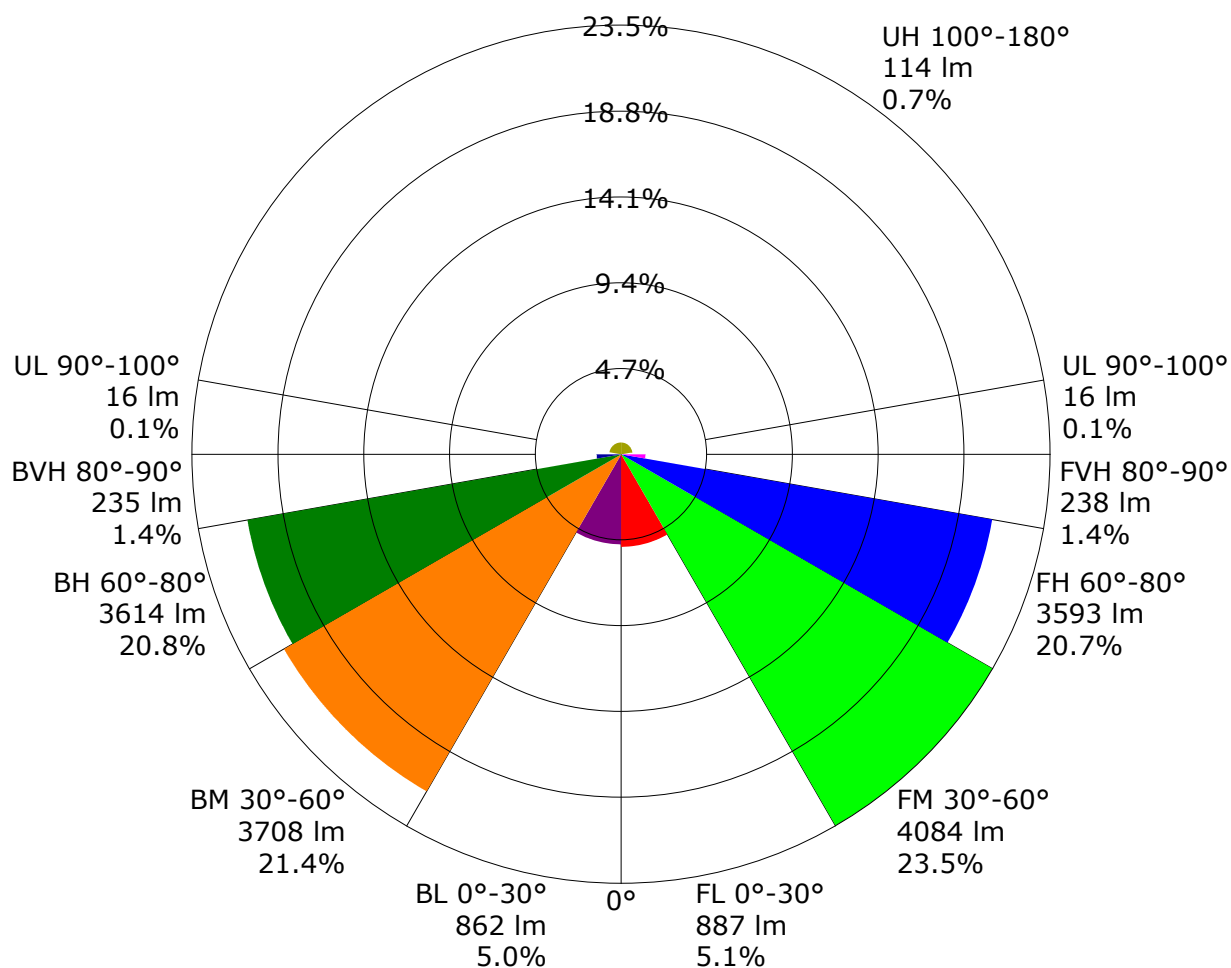

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 2.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	NA	NA	0.63	0.68	0.78	0.85	0.89	0.95	0.99	
	0.30		NA	NA	0.53	0.59	0.70	0.78	0.83	0.90	0.95	
	0.20		NA	NA	0.46	0.52	0.63	0.72	0.78	0.85	0.91	
0.50	0.50	0.20	NA	NA	0.60	0.65	0.75	0.81	0.85	0.91	0.95	
	0.30		NA	NA	0.52	0.58	0.68	0.75	0.80	0.87	0.91	
	0.20		NA	NA	0.45	0.51	0.62	0.70	0.75	0.83	0.88	
0.30	0.50	0.20	NA	NA	0.57	0.63	0.71	0.77	0.82	0.87	0.91	
	0.30		NA	NA	0.50	0.56	0.66	0.72	0.77	0.83	0.88	
	0.20		NA	NA	0.45	0.50	0.61	0.68	0.73	0.80	0.85	
0.00	0.00	0.00	NA	NA	0.42	0.47	0.57	0.64	0.69	0.76	0.80	
Rating:126W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 2.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	NA	NA	0.88	0.78	0.62	0.51	0.44	0.34	0.28	
	0.30		NA	NA	0.76	0.69	0.56	0.47	0.40	0.32	0.26	
	0.20		NA	NA	0.68	0.62	0.51	0.43	0.38	0.30	0.25	
0.50	0.50	0.20	NA	NA	0.84	0.75	0.60	0.52	0.42	0.33	0.27	
	0.30		NA	NA	0.75	0.67	0.55	0.46	0.39	0.31	0.25	
	0.20		NA	NA	0.67	0.61	0.50	0.42	0.37	0.29	0.24	
0.30	0.50	0.20	NA	NA	0.81	0.72	0.58	0.47	0.40	0.31	0.26	
	0.30		NA	NA	0.73	0.66	0.53	0.44	0.38	0.30	0.25	
	0.20		NA	NA	0.66	0.60	0.49	0.42	0.36	0.29	0.24	
0.00	0.00	0.00	0.99	0.99	0.58	0.52	0.43	0.35	0.30	0.24	0.20	
Rating:126W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 2.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	NA	NA	0.21	0.21	0.22	0.22	0.23	0.23	0.23	
	0.30		NA	NA	0.13	0.14	0.16	0.17	0.18	0.19	0.20	
	0.20		NA	NA	0.07	0.09	0.11	0.12	0.14	0.16	0.17	
0.50	0.50	0.20	NA	NA	0.20	0.21	0.21	0.21	0.22	0.22	0.22	
	0.30		NA	NA	0.13	0.14	0.15	0.16	0.17	0.18	0.19	
	0.20		NA	NA	0.07	0.08	0.10	0.12	0.13	0.15	0.16	
0.30	0.50	0.20	NA	NA	0.19	0.20	0.20	0.21	0.21	0.21	0.21	
	0.30		NA	NA	0.13	0.14	0.15	0.16	0.17	0.18	0.18	
	0.20		NA	NA	0.07	0.08	0.10	0.12	0.13	0.15	0.16	
0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
Rating:126W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1907.7	1.8	1.8	0.01	0.01
1.0-2.0	1908.4	5.5	7.3	0.03	0.04
2.0-3.0	1909.9	9.1	16.4	0.05	0.09
3.0-4.0	1912.3	12.8	29.2	0.07	0.17
4.0-5.0	1915.3	16.5	45.7	0.09	0.26
5.0-6.0	1919.2	20.2	65.9	0.12	0.38
6.0-7.0	1923.8	23.9	89.8	0.14	0.52
7.0-8.0	1929.2	27.6	117.4	0.16	0.68
8.0-9.0	1935.5	31.4	148.8	0.18	0.86
9.0-10.0	1942.5	35.2	183.9	0.20	1.06
10.0-11.0	1950.2	39.0	222.9	0.22	1.28
11.0-12.0	1958.6	42.8	265.7	0.25	1.53
12.0-13.0	1967.8	46.7	312.4	0.27	1.80
13.0-14.0	1977.7	50.6	363.0	0.29	2.09
14.0-15.0	1988.3	54.6	417.6	0.31	2.41
15.0-16.0	1999.4	58.6	476.2	0.34	2.74
16.0-17.0	2011.4	62.6	538.9	0.36	3.11
17.0-18.0	2023.9	66.7	605.6	0.38	3.49
18.0-19.0	2037.0	70.9	676.5	0.41	3.90
19.0-20.0	2051.1	75.1	751.6	0.43	4.33
20.0-21.0	2065.9	79.3	830.9	0.46	4.79
21.0-22.0	2081.5	83.7	914.6	0.48	5.27
22.0-23.0	2098.2	88.1	1002.6	0.51	5.78
23.0-24.0	2115.7	92.5	1095.1	0.53	6.31
24.0-25.0	2134.1	97.1	1192.2	0.56	6.87
25.0-26.0	2153.7	101.7	1293.9	0.59	7.46
26.0-27.0	2174.6	106.4	1400.3	0.61	8.07
27.0-28.0	2196.4	111.2	1511.5	0.64	8.71
28.0-29.0	2219.5	116.1	1627.6	0.67	9.38
29.0-30.0	2244.2	121.2	1748.8	0.70	10.08
30.0-31.0	2270.2	126.4	1875.2	0.73	10.81
31.0-32.0	2297.7	131.7	2006.8	0.76	11.57
32.0-33.0	2327.1	137.1	2143.9	0.79	12.36
33.0-34.0	2358.2	142.7	2286.7	0.82	13.18
34.0-35.0	2391.2	148.5	2435.2	0.86	14.04
35.0-36.0	2426.9	154.5	2589.7	0.89	14.93

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	2464.9	160.8	2750.5	0.93	15.85
37.0-38.0	2505.1	167.2	2917.8	0.96	16.82
38.0-39.0	2548.8	174.0	3091.8	1.00	17.82
39.0-40.0	2596.6	181.1	3272.9	1.04	18.86
40.0-41.0	2647.9	188.6	3461.5	1.09	19.95
41.0-42.0	2703.9	196.5	3657.9	1.13	21.08
42.0-43.0	2766.1	204.9	3862.9	1.18	22.26
43.0-44.0	2833.7	213.9	4076.8	1.23	23.50
44.0-45.0	2909.4	223.6	4300.4	1.29	24.79
45.0-46.0	2995.3	234.3	4534.7	1.35	26.14
46.0-47.0	3090.4	245.8	4780.5	1.42	27.55
47.0-48.0	3197.8	258.5	5039.0	1.49	29.04
48.0-49.0	3320.7	272.7	5311.8	1.57	30.62
49.0-50.0	3456.5	288.2	5600.0	1.66	32.28
50.0-51.0	3606.3	305.2	5905.2	1.76	34.04
51.0-52.0	3770.6	323.6	6228.8	1.87	35.90
52.0-53.0	3943.8	343.1	6571.9	1.98	37.88
53.0-54.0	4122.6	363.4	6935.3	2.09	39.97
54.0-55.0	4305.8	384.4	7319.7	2.22	42.19
55.0-56.0	4487.2	405.5	7725.2	2.34	44.53
56.0-57.0	4659.8	426.1	8151.3	2.46	46.98
57.0-58.0	4820.3	445.8	8597.1	2.57	49.55
58.0-59.0	4961.2	463.9	9061.0	2.67	52.23
59.0-60.0	5073.3	479.4	9540.4	2.76	54.99
60.0-61.0	5153.3	491.9	10032.2	2.83	57.82
61.0-62.0	5195.6	500.7	10532.9	2.89	60.71
62.0-63.0	5195.4	505.4	11038.3	2.91	63.62
63.0-64.0	5151.4	505.6	11543.9	2.91	66.54
64.0-65.0	5058.5	500.7	12044.5	2.89	69.42
65.0-66.0	4917.8	490.7	12535.3	2.83	72.25
66.0-67.0	4731.6	475.8	13011.1	2.74	74.99
67.0-68.0	4498.4	455.8	13466.9	2.63	77.62
68.0-69.0	4228.9	431.5	13898.3	2.49	80.11
69.0-70.0	3940.0	404.7	14303.0	2.33	82.44
70.0-71.0	3630.2	375.3	14678.3	2.16	84.60
71.0-72.0	3310.2	344.2	15022.5	1.98	86.59

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	2998.0	313.6	15336.1	1.81	88.39
73.0-74.0	2692.0	283.0	15619.1	1.63	90.02
74.0-75.0	2394.9	253.1	15872.2	1.46	91.48
75.0-76.0	2116.7	224.7	16096.9	1.30	92.78
76.0-77.0	1859.3	198.3	16295.2	1.14	93.92
77.0-78.0	1618.7	173.3	16468.5	1.00	94.92
78.0-79.0	1394.9	149.9	16618.4	0.86	95.78
79.0-80.0	1195.4	128.9	16747.3	0.74	96.53
80.0-81.0	1018.0	110.1	16857.4	0.63	97.16
81.0-82.0	851.1	92.3	16949.7	0.53	97.69
82.0-83.0	701.8	76.3	17026.0	0.44	98.13
83.0-84.0	566.8	61.8	17087.8	0.36	98.49
84.0-85.0	439.8	48.0	17135.8	0.28	98.77
85.0-86.0	325.3	35.6	17171.3	0.20	98.97
86.0-87.0	219.1	24.0	17195.3	0.14	99.11
87.0-88.0	131.6	14.4	17209.7	0.08	99.19
88.0-89.0	68.6	7.5	17217.3	0.04	99.24
89.0-90.0	27.1	3.0	17220.2	0.02	99.25
90.0-91.0	12.5	1.4	17221.6	0.01	99.26
91.0-92.0	12.8	1.4	17223.0	0.01	99.27
92.0-93.0	13.3	1.5	17224.5	0.01	99.28
93.0-94.0	13.8	1.5	17226.0	0.01	99.29
94.0-95.0	14.4	1.6	17227.5	0.01	99.30
95.0-96.0	14.9	1.6	17229.2	0.01	99.30
96.0-97.0	15.4	1.7	17230.8	0.01	99.31
97.0-98.0	16.0	1.7	17232.6	0.01	99.32
98.0-99.0	16.5	1.8	17234.4	0.01	99.33
99.0-100.0	17.0	1.8	17236.2	0.01	99.35
100.0-101.0	17.4	1.9	17238.1	0.01	99.36
101.0-102.0	17.9	1.9	17240.0	0.01	99.37
102.0-103.0	18.3	2.0	17242.0	0.01	99.38
103.0-104.0	18.7	2.0	17244.0	0.01	99.39
104.0-105.0	19.1	2.0	17246.0	0.01	99.40
105.0-106.0	19.5	2.1	17248.0	0.01	99.41
106.0-107.0	19.8	2.1	17250.1	0.01	99.43
107.0-108.0	20.2	2.1	17252.2	0.01	99.44

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	20.4	2.1	17254.4	0.01	99.45
109.0-110.0	20.7	2.1	17256.5	0.01	99.46
110.0-111.0	20.9	2.1	17258.6	0.01	99.47
111.0-112.0	21.1	2.2	17260.8	0.01	99.49
112.0-113.0	21.3	2.2	17263.0	0.01	99.50
113.0-114.0	21.5	2.2	17265.1	0.01	99.51
114.0-115.0	21.6	2.2	17267.3	0.01	99.52
115.0-116.0	21.8	2.2	17269.4	0.01	99.54
116.0-117.0	21.9	2.1	17271.6	0.01	99.55
117.0-118.0	22.0	2.1	17273.7	0.01	99.56
118.0-119.0	22.2	2.1	17275.8	0.01	99.57
119.0-120.0	22.3	2.1	17278.0	0.01	99.59
120.0-121.0	22.4	2.1	17280.1	0.01	99.60
121.0-122.0	22.5	2.1	17282.2	0.01	99.61
122.0-123.0	22.7	2.1	17284.3	0.01	99.62
123.0-124.0	22.8	2.1	17286.4	0.01	99.63
124.0-125.0	22.9	2.1	17288.5	0.01	99.65
125.0-126.0	23.1	2.1	17290.5	0.01	99.66
126.0-127.0	23.2	2.0	17292.6	0.01	99.67
127.0-128.0	23.3	2.0	17294.6	0.01	99.68
128.0-129.0	23.5	2.0	17296.6	0.01	99.69
129.0-130.0	23.6	2.0	17298.6	0.01	99.70
130.0-131.0	23.7	2.0	17300.6	0.01	99.72
131.0-132.0	23.8	2.0	17302.5	0.01	99.73
132.0-133.0	24.0	1.9	17304.5	0.01	99.74
133.0-134.0	24.1	1.9	17306.4	0.01	99.75
134.0-135.0	24.3	1.9	17308.3	0.01	99.76
135.0-136.0	24.4	1.9	17310.2	0.01	99.77
136.0-137.0	24.5	1.9	17312.0	0.01	99.78
137.0-138.0	24.6	1.8	17313.8	0.01	99.79
138.0-139.0	24.7	1.8	17315.6	0.01	99.80
139.0-140.0	24.8	1.8	17317.4	0.01	99.81
140.0-141.0	24.7	1.7	17319.1	0.01	99.82
141.0-142.0	24.8	1.7	17320.8	0.01	99.83
142.0-143.0	24.7	1.6	17322.5	0.01	99.84
143.0-144.0	24.6	1.6	17324.1	0.01	99.85

C Plane (°):0.0-360.0: 22.5
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 8.190 m
Humidity:
Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	24.5	1.6	17325.6	0.01	99.86
145.0-146.0	24.3	1.5	17327.1	0.01	99.87
146.0-147.0	24.1	1.5	17328.6	0.01	99.88
147.0-148.0	23.8	1.4	17330.0	0.01	99.89
148.0-149.0	23.5	1.3	17331.4	0.01	99.89
149.0-150.0	23.2	1.3	17332.6	0.01	99.90
150.0-151.0	22.8	1.2	17333.9	0.01	99.91
151.0-152.0	22.5	1.2	17335.1	0.01	99.91
152.0-153.0	22.1	1.1	17336.2	0.01	99.92
153.0-154.0	21.9	1.1	17337.2	0.01	99.93
154.0-155.0	21.6	1.0	17338.3	0.01	99.93
155.0-156.0	21.2	1.0	17339.2	0.01	99.94
156.0-157.0	20.9	0.9	17340.1	0.01	99.94
157.0-158.0	20.7	0.9	17341.0	0.00	99.95
158.0-159.0	20.4	0.8	17341.8	0.00	99.95
159.0-160.0	20.1	0.8	17342.6	0.00	99.96
160.0-161.0	19.9	0.7	17343.3	0.00	99.96
161.0-162.0	19.7	0.7	17344.0	0.00	99.97
162.0-163.0	19.5	0.6	17344.7	0.00	99.97
163.0-164.0	19.4	0.6	17345.3	0.00	99.97
164.0-165.0	19.2	0.6	17345.8	0.00	99.98
165.0-166.0	19.0	0.5	17346.4	0.00	99.98
166.0-167.0	18.9	0.5	17346.8	0.00	99.98
167.0-168.0	18.8	0.4	17347.3	0.00	99.99
168.0-169.0	18.8	0.4	17347.7	0.00	99.99
169.0-170.0	18.7	0.4	17348.1	0.00	99.99
170.0-171.0	18.6	0.3	17348.4	0.00	99.99
171.0-172.0	18.6	0.3	17348.7	0.00	99.99
172.0-173.0	18.5	0.3	17349.0	0.00	100.00
173.0-174.0	18.4	0.2	17349.2	0.00	100.00
174.0-175.0	18.4	0.2	17349.4	0.00	100.00
175.0-176.0	18.4	0.2	17349.5	0.00	100.00
176.0-177.0	18.3	0.1	17349.7	0.00	100.00
177.0-178.0	18.4	0.1	17349.8	0.00	100.00
178.0-179.0	18.4	0.1	17349.8	0.00	100.00
179.0-180.0	18.4	0.0	17349.8	0.00	100.00

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5
G1.0	1907.8	1908.8	1909.4	1910.0	1909.8	1909.7	1909.3	1908.5	1907.5	1906.9
G2.0	1908.6	1910.9	1911.9	1913.2	1913.7	1913.1	1911.5	1910.0	1908.0	1906.8
G3.0	1910.5	1913.2	1915.3	1917.4	1918.3	1917.7	1915.4	1912.7	1909.2	1907.7
G4.0	1912.8	1916.9	1920.2	1922.7	1923.9	1922.2	1919.2	1915.3	1911.7	1908.8
G5.0	1916.1	1920.7	1925.0	1928.5	1929.5	1928.1	1923.5	1919.1	1914.5	1911.1
G6.0	1919.6	1925.0	1930.5	1935.3	1936.9	1935.0	1929.6	1923.8	1917.6	1913.9
G7.0	1924.0	1930.6	1937.1	1942.9	1945.0	1942.7	1936.3	1929.0	1922.0	1917.5
G8.0	1929.0	1936.5	1944.0	1951.4	1954.5	1951.1	1943.7	1934.8	1926.5	1921.3
G9.0	1935.1	1943.0	1951.8	1960.4	1963.6	1961.2	1952.0	1941.5	1931.7	1926.2
G10.0	1941.8	1950.6	1960.8	1970.6	1975.4	1971.5	1960.2	1948.7	1937.9	1931.6
G11.0	1948.4	1958.4	1969.8	1981.6	1986.9	1983.1	1970.0	1956.5	1945.0	1938.0
G12.0	1956.1	1966.9	1979.8	1993.1	1999.8	1994.9	1980.4	1964.6	1952.0	1944.8
G13.0	1964.2	1975.7	1990.1	2006.0	2013.0	2007.4	1991.8	1973.9	1960.3	1952.6
G14.0	1972.8	1984.9	2000.9	2019.0	2027.9	2022.5	2003.4	1983.7	1968.7	1960.6
G15.0	1982.2	1995.1	2012.8	2032.7	2042.5	2036.4	2015.6	1993.9	1978.3	1969.8
G16.0	1993.2	2006.3	2025.5	2046.9	2057.9	2051.0	2028.6	2005.3	1987.6	1978.9
G17.0	2004.5	2018.4	2038.6	2061.5	2074.5	2067.1	2042.9	2017.3	1999.2	1989.5
G18.0	2015.8	2030.4	2051.9	2076.3	2092.1	2083.2	2057.4	2029.1	2010.6	2000.2
G19.0	2027.9	2043.3	2065.7	2093.5	2110.5	2100.8	2072.2	2042.1	2022.7	2011.1
G20.0	2042.1	2056.7	2081.3	2111.6	2131.4	2120.1	2087.7	2056.0	2036.6	2023.9
G21.0	2055.7	2071.8	2095.7	2129.8	2151.8	2139.1	2104.7	2070.5	2050.3	2036.5
G22.0	2071.4	2087.0	2112.0	2150.7	2175.2	2160.1	2120.9	2085.3	2065.4	2050.4
G23.0	2087.3	2102.7	2128.6	2172.9	2199.0	2182.1	2139.2	2102.5	2082.4	2065.0
G24.0	2105.1	2120.2	2146.3	2194.2	2224.2	2205.3	2157.9	2120.0	2098.8	2080.9
G25.0	2124.0	2138.5	2164.4	2217.9	2251.8	2230.6	2177.4	2138.1	2118.0	2097.4
G26.0	2144.4	2158.5	2184.3	2244.9	2279.5	2256.1	2198.7	2157.7	2138.6	2115.6
G27.0	2167.3	2180.0	2206.7	2270.7	2308.0	2282.5	2220.5	2178.5	2160.4	2135.1
G28.0	2190.7	2202.3	2229.4	2297.7	2337.8	2310.2	2244.6	2200.6	2183.6	2154.9
G29.0	2216.4	2226.9	2254.2	2326.4	2369.0	2339.5	2269.7	2225.7	2208.1	2176.3
G30.0	2244.3	2252.3	2279.8	2357.8	2403.2	2370.7	2296.1	2251.1	2236.0	2199.9
G31.0	2275.0	2281.2	2307.8	2387.7	2435.3	2400.3	2324.2	2278.1	2265.4	2224.8
G32.0	2306.7	2310.9	2336.7	2420.8	2472.1	2434.4	2353.4	2309.0	2298.3	2252.7
G33.0	2343.3	2345.1	2368.9	2454.5	2509.3	2467.8	2385.6	2340.3	2331.8	2281.0
G34.0	2381.4	2379.8	2401.3	2489.9	2548.2	2503.2	2418.2	2375.0	2368.1	2312.8
G35.0	2422.7	2417.1	2435.5	2528.9	2592.0	2539.7	2451.7	2413.4	2408.9	2344.6
G36.0	2468.2	2458.1	2472.1	2568.9	2638.6	2581.1	2488.4	2454.0	2454.4	2381.1

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	2515.9	2503.0	2509.4	2610.8	2687.4	2621.9	2524.9	2496.0	2500.8	2418.9
G38.0	2571.8	2548.4	2550.3	2657.1	2741.9	2666.1	2566.4	2541.6	2551.3	2458.4
G39.0	2629.8	2598.8	2592.3	2707.4	2802.3	2714.3	2607.4	2593.9	2609.0	2503.2
G40.0	2691.6	2654.6	2637.2	2764.7	2872.3	2768.8	2650.2	2647.6	2671.8	2551.8
G41.0	2761.1	2710.7	2681.5	2823.6	2944.6	2827.8	2696.6	2707.1	2738.0	2602.4
G42.0	2839.8	2777.0	2733.2	2895.1	3031.1	2891.1	2745.9	2770.7	2811.4	2658.2
G43.0	2923.0	2846.6	2786.8	2971.7	3125.3	2962.4	2802.5	2841.6	2894.9	2721.5
G44.0	3011.5	2924.0	2843.1	3058.0	3231.4	3042.7	2859.1	2919.9	2982.3	2787.9
G45.0	3116.9	3007.6	2910.2	3153.0	3354.8	3135.4	2926.3	3009.3	3084.1	2863.6
G46.0	3233.2	3103.8	2983.8	3268.5	3491.0	3238.4	3000.2	3108.0	3202.0	2945.9
G47.0	3362.2	3210.2	3065.7	3392.4	3641.8	3353.3	3081.5	3215.0	3323.0	3039.8
G48.0	3508.8	3332.6	3158.8	3534.4	3809.9	3486.0	3174.2	3339.2	3473.1	3149.8
G49.0	3681.9	3478.4	3272.0	3696.6	3992.1	3638.7	3280.7	3481.3	3641.7	3274.8
G50.0	3858.6	3631.5	3390.5	3869.5	4173.9	3810.7	3403.9	3645.1	3820.1	3409.2
G51.0	4057.3	3810.9	3531.8	4061.3	4357.2	3999.9	3542.9	3826.8	4026.6	3576.3
G52.0	4263.0	4007.1	3699.2	4269.1	4531.0	4199.7	3700.8	4025.5	4232.2	3760.1
G53.0	4472.6	4233.2	3874.3	4466.5	4676.5	4407.7	3881.8	4239.8	4435.4	3959.4
G54.0	4674.6	4454.6	4084.5	4652.6	4796.5	4611.9	4086.0	4464.1	4638.6	4180.4
G55.0	4866.1	4700.2	4327.2	4821.3	4882.2	4806.8	4323.3	4692.3	4822.2	4409.6
G56.0	5029.4	4944.5	4596.5	4956.9	4921.8	4980.7	4587.8	4908.8	4968.9	4630.9
G57.0	5148.4	5174.5	4887.6	5061.3	4913.1	5124.6	4876.5	5099.4	5072.0	4844.2
G58.0	5218.1	5392.8	5209.0	5124.9	4857.8	5231.6	5194.2	5255.2	5120.1	5038.9
G59.0	5226.5	5564.1	5570.2	5133.5	4754.8	5293.8	5529.6	5362.9	5100.9	5189.7
G60.0	5173.0	5681.9	5913.1	5090.5	4612.0	5305.3	5880.6	5415.4	5023.2	5284.3
G61.0	5055.6	5752.4	6268.9	4997.6	4420.4	5265.3	6223.4	5406.3	4882.1	5327.7
G62.0	4891.0	5762.7	6587.2	4846.7	4183.8	5165.3	6519.6	5341.9	4704.9	5312.6
G63.0	4687.9	5716.9	6857.1	4655.6	3935.0	5013.7	6760.4	5228.8	4503.1	5247.5
G64.0	4459.2	5618.3	7051.9	4420.5	3645.7	4810.5	6917.8	5075.5	4266.4	5136.6
G65.0	4202.4	5474.0	7141.2	4146.8	3326.9	4558.1	6972.3	4882.9	4000.3	4986.4
G66.0	3921.4	5286.4	7108.6	3857.9	3043.1	4276.0	6911.3	4662.7	3721.1	4800.9
G67.0	3634.4	5058.1	6952.3	3553.2	2765.6	3961.6	6740.0	4399.0	3434.9	4575.5
G68.0	3340.8	4771.5	6667.2	3237.9	2494.0	3626.6	6474.0	4094.7	3137.9	4304.0
G69.0	3048.5	4460.5	6300.5	2949.6	2255.1	3314.9	6129.2	3785.8	2844.3	4007.2
G70.0	2757.8	4132.0	5885.6	2681.5	2037.5	3027.1	5719.6	3463.6	2569.8	3702.3
G71.0	2477.1	3767.7	5402.6	2407.3	1831.4	2733.4	5263.3	3134.6	2294.6	3367.2
G72.0	2222.1	3411.1	4912.8	2168.5	1636.8	2449.7	4802.0	2824.9	2051.2	3044.5
G73.0	1984.8	3062.7	4421.4	1944.8	1466.0	2194.8	4334.8	2528.3	1830.8	2737.4

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	1767.1	2715.9	3910.8	1735.6	1308.9	1956.3	3871.0	2250.0	1619.3	2439.4
G75.0	1566.1	2408.5	3434.4	1542.1	1163.9	1739.3	3408.4	1992.1	1429.3	2157.0
G76.0	1381.2	2134.3	2998.7	1370.7	1034.8	1547.7	2959.2	1752.9	1259.7	1906.2
G77.0	1216.8	1877.6	2592.0	1205.8	913.5	1369.3	2556.7	1541.9	1102.3	1673.6
G78.0	1057.6	1630.9	2209.3	1061.2	796.2	1195.2	2194.0	1346.6	957.1	1454.7
G79.0	918.4	1416.4	1886.0	924.7	687.6	1039.6	1873.6	1171.6	828.6	1254.9
G80.0	792.9	1217.7	1605.2	792.3	589.5	896.4	1586.7	1008.8	714.6	1083.8
G81.0	681.4	1036.4	1362.6	678.9	501.7	763.3	1329.3	864.3	608.1	920.1
G82.0	577.4	883.7	1123.9	578.6	422.3	652.6	1106.1	735.9	508.1	780.8
G83.0	484.3	746.5	917.0	477.8	338.0	539.2	905.0	609.5	419.7	653.7
G84.0	392.9	615.2	728.6	386.6	273.7	436.3	727.3	494.0	335.0	529.2
G85.0	311.9	494.7	552.6	305.1	214.2	351.0	555.5	393.0	256.4	415.9
G86.0	237.7	375.7	412.8	226.5	153.4	275.2	408.2	298.3	186.5	297.6
G87.0	162.9	274.1	275.4	140.4	96.8	188.3	289.2	217.9	122.8	190.6
G88.0	92.2	178.2	160.5	74.0	51.7	103.5	172.5	139.7	65.3	118.8
G89.0	28.7	94.9	71.9	32.6	20.9	43.7	76.1	70.0	22.4	55.3
G90.0	13.7	16.3	16.4	13.6	11.3	14.6	16.0	14.4	9.4	11.6
G91.0	12.7	16.1	15.9	13.7	11.6	14.7	15.8	14.8	9.6	12.2
G92.0	13.4	15.8	16.2	14.0	11.9	14.9	16.4	15.4	10.3	12.7
G93.0	14.0	16.3	16.5	14.3	12.5	15.3	16.7	15.8	10.9	13.4
G94.0	14.8	16.9	17.0	14.9	13.2	16.1	17.3	16.4	11.5	14.0
G95.0	15.4	17.4	17.5	15.3	13.6	16.5	17.7	16.8	12.1	14.5
G96.0	15.9	17.8	17.7	15.7	14.2	16.9	18.0	17.6	12.8	14.8
G97.0	16.7	18.5	18.2	16.1	15.0	17.5	18.5	17.9	13.4	15.8
G98.0	17.3	19.1	18.9	16.7	15.1	18.3	19.1	18.5	14.1	16.1
G99.0	17.7	19.6	19.1	17.4	15.7	18.5	19.5	18.7	14.7	16.5
G100.0	18.0	19.9	19.5	17.5	16.3	19.0	19.8	19.2	15.2	17.1
G101.0	18.8	20.4	19.8	18.1	16.8	19.2	20.2	19.7	15.5	17.6
G102.0	19.0	20.8	20.1	18.6	17.3	19.9	20.4	19.9	16.0	18.2
G103.0	19.6	21.1	20.7	18.8	17.6	20.2	20.9	20.3	16.6	18.5
G104.0	19.8	21.6	20.8	19.3	18.2	20.5	21.2	20.7	17.1	18.9
G105.0	20.3	21.6	20.8	19.6	18.5	20.9	21.5	21.3	17.5	19.3
G106.0	20.7	22.1	21.3	20.0	19.0	21.1	21.5	21.5	17.9	19.6
G107.0	21.2	22.2	21.4	20.2	19.4	21.5	21.9	22.1	18.5	20.3
G108.0	21.4	22.8	21.6	20.5	20.0	21.6	22.0	22.1	18.8	20.5
G109.0	21.8	22.8	21.7	20.7	20.0	22.1	22.0	22.2	19.3	20.5
G110.0	22.0	23.1	21.9	20.8	20.0	22.0	22.1	22.6	19.8	20.7

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	22.4	23.3	21.7	21.1	20.6	22.6	22.3	22.7	19.8	21.1
G112.0	22.3	23.3	21.9	21.3	20.9	22.8	22.3	22.9	19.9	21.4
G113.0	22.5	23.4	21.7	21.3	21.1	22.8	22.4	23.0	20.3	21.5
G114.0	22.6	23.4	22.0	21.5	21.5	22.9	22.4	23.3	20.5	21.7
G115.0	22.8	23.5	22.2	21.8	21.5	22.9	22.7	23.3	20.8	21.7
G116.0	22.9	23.5	22.2	21.7	21.7	23.2	22.4	23.2	20.8	22.2
G117.0	22.9	23.5	22.0	21.8	21.8	23.3	22.8	23.0	21.0	22.0
G118.0	22.9	23.6	22.1	22.0	21.7	23.4	22.7	23.2	21.2	22.2
G119.0	22.9	23.5	22.3	22.0	22.1	23.5	22.9	23.2	21.3	22.4
G120.0	22.9	23.5	22.5	22.1	22.2	23.6	22.8	23.4	21.3	22.3
G121.0	22.9	23.6	22.3	22.0	21.9	23.7	23.3	23.4	21.2	22.4
G122.0	22.8	23.5	22.8	22.1	22.1	23.6	23.3	23.4	21.6	22.5
G123.0	22.9	23.6	22.6	22.2	22.4	23.7	23.4	23.3	21.7	22.8
G124.0	22.9	23.9	22.9	22.1	22.4	23.9	23.4	23.3	21.9	22.9
G125.0	22.9	23.7	22.9	22.2	22.3	23.9	23.3	23.0	21.9	23.4
G126.0	22.9	23.7	23.2	22.4	22.2	23.6	23.4	23.4	22.2	23.5
G127.0	22.9	23.7	23.2	22.1	22.4	23.9	24.0	23.4	22.3	23.5
G128.0	22.8	24.1	23.2	22.4	22.4	24.3	23.8	23.3	22.4	23.7
G129.0	22.9	24.0	23.2	22.2	22.2	24.2	23.9	23.4	22.3	23.7
G130.0	22.9	24.0	23.4	22.4	22.2	24.1	24.2	23.3	22.6	24.1
G131.0	22.9	23.9	23.5	22.4	22.5	24.1	24.0	23.3	22.6	24.7
G132.0	22.9	24.2	23.5	22.5	22.4	24.1	24.5	23.5	22.9	25.0
G133.0	22.9	24.0	23.5	22.6	22.4	24.1	24.5	23.5	23.1	25.2
G134.0	22.9	24.2	23.8	22.5	22.4	24.1	24.7	23.4	23.2	25.4
G135.0	22.9	24.2	23.9	22.7	22.5	24.1	24.7	23.9	23.5	26.1
G136.0	22.9	24.2	24.0	22.7	22.4	24.2	24.8	23.9	23.7	26.3
G137.0	22.9	24.2	24.1	22.8	22.4	24.1	24.7	23.8	23.7	26.7
G138.0	22.8	24.1	24.1	22.7	22.4	23.7	24.7	23.9	24.1	26.9
G139.0	22.9	24.1	24.0	22.7	22.3	24.1	24.7	24.1	24.2	27.2
G140.0	22.8	23.7	23.9	22.6	22.4	23.7	24.8	24.0	24.1	27.4
G141.0	22.8	23.6	23.6	22.6	22.2	23.6	24.6	24.0	24.5	27.5
G142.0	22.9	24.0	23.5	22.4	22.2	23.6	24.4	23.8	24.8	27.7
G143.0	22.9	23.6	23.6	22.5	21.9	23.2	24.1	23.4	24.5	27.4
G144.0	22.8	23.5	23.0	22.2	21.8	23.0	23.6	23.3	24.6	27.4
G145.0	22.8	23.4	23.0	21.9	21.7	22.7	23.6	23.4	24.5	27.3
G146.0	22.5	23.0	22.8	21.8	21.5	22.3	23.2	23.0	24.5	26.8
G147.0	22.3	22.8	22.6	21.3	21.1	22.3	22.8	22.8	24.4	26.6

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	22.2	22.5	22.1	21.1	20.9	22.0	22.6	22.8	24.2	26.3
G149.0	21.8	22.2	21.6	20.8	20.7	21.5	22.2	22.3	23.9	25.9
G150.0	21.4	22.0	21.5	20.6	20.5	21.1	21.7	21.9	23.7	25.3
G151.0	21.4	21.7	21.0	20.3	20.4	21.2	21.6	21.6	23.3	24.8
G152.0	21.0	21.5	20.8	20.0	20.3	20.8	21.0	21.4	22.9	24.2
G153.0	20.6	21.0	20.2	20.0	20.1	20.5	20.7	21.0	22.8	23.9
G154.0	20.6	20.9	20.3	19.9	20.0	20.3	20.7	20.4	22.2	23.5
G155.0	20.0	20.4	20.1	19.6	19.6	20.3	20.2	20.4	22.0	22.9
G156.0	19.8	20.4	20.0	19.2	19.4	19.7	19.9	19.9	21.6	22.7
G157.0	19.8	19.8	19.4	19.0	19.0	19.8	19.8	20.1	21.2	22.2
G158.0	19.2	19.9	19.4	19.2	19.2	19.6	19.7	19.8	20.7	21.7
G159.0	19.3	19.6	19.2	18.8	18.7	19.6	19.3	19.6	20.3	21.5
G160.0	19.1	19.5	18.9	18.8	18.6	19.3	19.2	19.3	19.9	21.0
G161.0	18.7	19.3	18.8	18.7	18.5	19.3	18.9	19.3	19.8	21.0
G162.0	18.6	19.2	18.8	18.4	18.5	19.2	18.9	19.1	19.6	20.4
G163.0	18.4	18.9	18.6	18.3	18.4	19.0	18.7	19.0	19.3	20.3
G164.0	18.5	19.2	18.6	18.1	18.4	18.9	18.5	18.9	19.2	20.1
G165.0	18.3	18.6	18.5	18.3	18.2	18.6	18.5	18.5	18.8	19.7
G166.0	18.3	18.6	18.3	18.2	18.1	18.7	18.5	18.6	18.7	19.7
G167.0	18.0	18.6	18.4	18.4	18.0	18.7	18.4	18.6	18.7	19.6
G168.0	18.1	18.6	18.2	18.2	18.0	18.6	18.4	18.5	18.6	19.5
G169.0	18.0	18.6	18.4	18.2	18.0	18.5	18.4	18.5	18.5	19.3
G170.0	17.8	18.7	18.5	18.3	18.0	18.7	18.5	18.3	18.4	19.0
G171.0	17.9	18.4	18.2	18.1	17.9	18.3	18.5	18.3	18.4	19.1
G172.0	17.9	18.7	18.4	18.3	18.1	18.5	18.3	18.3	18.3	19.0
G173.0	18.0	18.6	18.4	18.1	17.9	18.5	18.3	18.4	18.4	18.9
G174.0	18.0	18.5	18.4	18.0	17.6	18.3	18.3	18.4	18.3	18.9
G175.0	18.1	18.6	18.4	18.3	18.0	18.4	18.3	18.3	18.3	18.7
G176.0	18.0	18.4	18.2	17.8	17.9	18.4	18.1	18.3	18.1	18.9
G177.0	18.0	18.6	18.4	17.8	17.9	18.5	18.4	18.3	18.1	18.7
G178.0	17.9	18.7	18.4	18.2	18.1	18.9	18.5	18.3	18.0	18.5
G179.0	18.1	18.6	18.4	18.2	18.0	18.5	18.4	18.3	18.3	18.5
G180.0	18.0	18.6	18.5	18.4	18.1	18.9	18.4	18.2	18.1	18.7

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5	1907.5			
G1.0	1906.1	1906.0	1906.0	1906.1	1906.1	1907.2	1907.8			
G2.0	1905.9	1905.3	1905.2	1905.6	1906.0	1907.5	1908.6			
G3.0	1905.4	1905.2	1905.2	1906.0	1906.9	1908.7	1910.5			
G4.0	1906.9	1905.9	1906.6	1907.1	1907.9	1910.3	1912.8			
G5.0	1908.1	1908.4	1908.5	1909.0	1909.8	1912.4	1916.1			
G6.0	1911.1	1910.8	1911.2	1911.6	1912.8	1916.1	1919.6			
G7.0	1914.4	1914.2	1914.4	1915.4	1916.4	1919.5	1924.0			
G8.0	1918.6	1919.1	1919.8	1919.8	1920.6	1923.9	1929.0			
G9.0	1923.8	1924.6	1925.3	1925.1	1925.7	1929.2	1935.1			
G10.0	1929.5	1930.5	1931.9	1932.0	1931.7	1935.0	1941.8			
G11.0	1935.9	1937.8	1939.3	1938.3	1938.0	1941.5	1948.4			
G12.0	1943.1	1945.0	1947.7	1946.3	1945.0	1948.5	1956.1			
G13.0	1950.5	1954.2	1956.9	1955.4	1953.1	1955.8	1964.2			
G14.0	1958.9	1963.7	1967.1	1965.3	1961.5	1964.9	1972.8			
G15.0	1967.9	1974.1	1978.2	1975.7	1970.7	1973.6	1982.2			
G16.0	1977.4	1984.7	1989.7	1986.2	1980.8	1982.9	1993.2			
G17.0	1988.4	1996.3	2001.2	1998.4	1990.9	1993.0	2004.5			
G18.0	1998.9	2007.9	2014.1	2010.5	2001.9	2003.5	2015.8			
G19.0	2010.4	2020.0	2026.7	2023.7	2013.4	2015.2	2027.9			
G20.0	2022.4	2033.2	2042.0	2037.0	2025.6	2027.4	2042.1			
G21.0	2034.8	2046.9	2056.5	2051.0	2039.4	2040.2	2055.7			
G22.0	2048.1	2061.6	2072.9	2066.5	2052.1	2053.8	2071.4			
G23.0	2062.2	2077.2	2090.2	2082.5	2066.9	2068.3	2087.3			
G24.0	2075.8	2092.8	2107.4	2099.0	2082.1	2084.2	2105.1			
G25.0	2090.8	2109.2	2125.8	2116.7	2096.9	2100.1	2124.0			
G26.0	2106.3	2126.3	2144.9	2134.8	2113.4	2118.3	2144.4			
G27.0	2123.2	2144.9	2164.7	2153.9	2130.7	2137.4	2167.3			
G28.0	2139.7	2163.1	2186.5	2174.1	2148.6	2157.6	2190.7			
G29.0	2157.7	2182.4	2207.9	2194.5	2168.1	2179.7	2216.4			
G30.0	2177.0	2202.4	2231.3	2216.7	2187.8	2204.0	2244.3			
G31.0	2197.2	2223.6	2255.7	2239.2	2210.1	2229.4	2275.0			
G32.0	2218.4	2245.7	2280.5	2263.0	2232.5	2256.2	2306.7			
G33.0	2240.0	2269.5	2308.7	2288.1	2256.1	2286.8	2343.3			
G34.0	2263.8	2294.2	2336.9	2313.8	2282.0	2317.6	2381.4			
G35.0	2287.2	2320.3	2368.3	2342.0	2307.5	2352.6	2422.7			
G36.0	2313.2	2349.5	2403.2	2372.2	2336.3	2389.9	2468.2			

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 8.190 m
 Humidity:
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	2340.4	2379.8	2439.9	2403.8	2365.7	2429.5	2515.9			
G38.0	2367.9	2411.8	2478.8	2436.2	2396.0	2471.4	2571.8			
G39.0	2397.9	2447.9	2523.0	2472.5	2428.8	2518.7	2629.8			
G40.0	2430.1	2487.5	2571.4	2511.6	2464.1	2569.8	2691.6			
G41.0	2463.3	2529.8	2623.0	2553.0	2500.1	2623.7	2761.1			
G42.0	2500.0	2576.0	2680.6	2599.0	2541.2	2686.8	2839.8			
G43.0	2540.7	2629.0	2746.9	2651.1	2582.5	2751.7	2923.0			
G44.0	2583.4	2685.1	2816.5	2705.7	2627.7	2823.1	3011.5			
G45.0	2632.4	2750.9	2897.5	2768.9	2679.7	2909.7	3116.9			
G46.0	2688.9	2823.1	2986.2	2838.3	2739.1	2999.5	3233.2			
G47.0	2746.5	2904.6	3085.6	2917.2	2803.4	3101.8	3362.2			
G48.0	2816.8	3001.2	3199.4	3009.5	2875.3	3216.0	3508.8			
G49.0	2897.0	3102.9	3319.2	3112.7	2959.2	3349.4	3681.9			
G50.0	2983.0	3220.6	3437.1	3221.7	3054.9	3499.6	3858.6			
G51.0	3090.4	3346.3	3562.1	3352.3	3162.1	3667.2	4057.3			
G52.0	3210.0	3485.9	3676.3	3488.3	3286.2	3853.5	4263.0			
G53.0	3344.7	3617.4	3780.0	3627.3	3433.3	4063.2	4472.6			
G54.0	3504.6	3749.5	3879.8	3772.1	3591.7	4267.6	4674.6			
G55.0	3688.8	3877.7	3973.4	3914.6	3780.1	4489.9	4866.1			
G56.0	3889.3	3997.4	4058.6	4049.7	3988.6	4705.0	5029.4			
G57.0	4131.3	4113.6	4135.7	4182.9	4237.3	4897.8	5148.4			
G58.0	4387.0	4231.0	4197.3	4320.2	4499.3	5070.6	5218.1			
G59.0	4680.0	4336.5	4227.3	4451.2	4795.4	5192.5	5226.5			
G60.0	4982.0	4417.9	4223.7	4565.6	5100.2	5269.4	5173.0			
G61.0	5322.7	4471.1	4183.5	4665.6	5438.6	5287.6	5055.6			
G62.0	5651.8	4485.7	4098.0	4727.3	5765.3	5247.0	4891.0			
G63.0	5954.2	4457.1	3979.2	4747.7	6062.4	5154.8	4687.9			
G64.0	6225.5	4379.1	3819.3	4720.6	6322.8	5014.0	4459.2			
G65.0	6431.7	4252.5	3626.6	4639.2	6516.6	4831.9	4202.4			
G66.0	6544.0	4085.9	3411.1	4507.1	6623.0	4618.6	3921.4			
G67.0	6558.5	3883.0	3179.3	4325.5	6638.3	4371.7	3634.4			
G68.0	6454.7	3643.5	2933.3	4092.2	6556.9	4089.4	3340.8			
G69.0	6242.6	3386.9	2688.9	3829.4	6372.1	3790.6	3048.5			
G70.0	5950.9	3129.7	2459.2	3555.5	6105.8	3494.8	2757.8			
G71.0	5566.7	2855.8	2221.5	3254.9	5741.5	3175.1	2477.1			
G72.0	5144.6	2597.5	2002.7	2961.2	5328.5	2873.4	2222.1			
G73.0	4702.8	2351.8	1797.9	2678.4	4882.7	2586.8	1984.8			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	4237.6	2110.5	1602.4	2402.4	4397.7	2312.6	1767.1			
G75.0	3759.9	1884.1	1420.9	2143.1	3894.1	2056.7	1566.1			
G76.0	3304.2	1677.2	1256.6	1908.4	3417.0	1825.6	1381.2			
G77.0	2878.6	1487.5	1106.4	1691.0	2951.6	1600.0	1216.8			
G78.0	2475.7	1295.4	913.5	1478.4	2561.1	1406.1	1057.6			
G79.0	2119.9	1060.2	770.3	1228.0	2198.9	1226.2	918.4			
G80.0	1814.6	920.3	664.3	1040.2	1868.0	1053.2	792.9			
G81.0	1477.7	791.6	535.8	891.2	1576.6	907.9	681.4			
G82.0	1186.0	608.9	422.1	703.5	1242.3	776.6	577.4			
G83.0	979.0	507.8	320.5	583.1	1018.4	650.9	484.3			
G84.0	707.8	370.8	239.6	427.7	790.0	534.0	392.9			
G85.0	518.1	253.6	136.7	300.4	593.3	431.3	311.9			
G86.0	373.6	152.4	50.7	164.0	391.3	321.5	237.7			
G87.0	201.8	51.2	7.2	50.5	193.3	225.1	162.9			
G88.0	87.1	27.2	6.9	28.8	82.5	136.4	92.2			
G89.0	26.3	9.6	7.0	12.4	32.1	64.8	28.7			
G90.0	11.9	9.3	7.5	10.0	11.8	11.0	13.7			
G91.0	12.2	9.9	8.0	10.6	12.2	11.1	12.7			
G92.0	12.9	10.5	8.7	11.3	12.4	11.5	13.4			
G93.0	13.3	11.2	9.2	11.7	13.0	12.3	14.0			
G94.0	13.7	11.8	9.8	12.3	13.7	12.8	14.8			
G95.0	14.5	12.1	10.4	13.2	14.0	13.4	15.4			
G96.0	14.7	12.7	11.0	13.4	14.6	13.8	15.9			
G97.0	15.3	13.6	11.4	14.0	15.2	14.4	16.7			
G98.0	15.9	14.0	12.4	14.6	15.6	15.2	17.3			
G99.0	16.2	14.5	12.8	15.2	15.9	15.5	17.7			
G100.0	16.5	15.3	13.7	15.6	16.5	16.0	18.0			
G101.0	17.2	15.7	13.7	15.9	17.0	16.8	18.8			
G102.0	17.6	16.4	14.4	16.5	17.4	17.3	19.0			
G103.0	18.1	16.7	15.0	16.8	17.8	17.6	19.6			
G104.0	18.6	17.1	15.1	17.4	17.9	17.9	19.8			
G105.0	18.6	17.6	15.9	17.7	18.5	18.5	20.3			
G106.0	19.0	18.2	16.7	18.1	18.9	18.9	20.7			
G107.0	19.6	18.3	16.9	18.4	19.0	19.2	21.2			
G108.0	19.7	18.9	17.4	18.9	19.1	19.6	21.4			
G109.0	19.8	19.4	17.6	19.1	19.7	19.9	21.8			
G110.0	20.1	19.6	18.1	19.5	19.7	20.2	22.0			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	20.1	19.9	18.4	19.7	20.1	20.7	22.4			
G112.0	20.1	20.0	18.8	20.0	19.9	20.9	22.3			
G113.0	20.6	20.7	19.3	20.4	20.4	21.1	22.5			
G114.0	20.6	20.9	19.6	20.4	20.3	21.5	22.6			
G115.0	20.8	21.3	19.7	20.5	20.5	21.4	22.8			
G116.0	20.9	21.4	19.8	21.0	20.7	21.6	22.9			
G117.0	21.4	21.7	20.0	21.2	20.8	21.9	22.9			
G118.0	21.5	21.9	20.6	21.4	21.0	22.0	22.9			
G119.0	21.7	22.0	20.7	21.8	21.2	22.1	22.9			
G120.0	22.1	22.4	21.1	21.8	21.5	22.3	22.9			
G121.0	22.5	22.6	21.1	22.0	21.9	22.4	22.9			
G122.0	22.6	23.0	21.1	22.2	22.3	22.6	22.8			
G123.0	23.2	23.1	21.3	22.4	22.4	22.8	22.9			
G124.0	23.0	23.3	21.7	22.8	22.9	23.2	22.9			
G125.0	23.9	23.6	21.7	22.7	23.2	23.3	22.9			
G126.0	24.0	23.7	22.1	23.3	23.4	23.3	22.9			
G127.0	24.1	23.9	22.3	23.3	23.6	23.8	22.9			
G128.0	24.6	24.0	22.3	23.4	24.1	23.9	22.8			
G129.0	25.2	24.3	22.5	23.5	24.5	24.2	22.9			
G130.0	25.2	24.4	22.6	23.6	24.7	24.2	22.9			
G131.0	25.7	24.5	22.9	23.6	24.8	24.5	22.9			
G132.0	26.0	24.5	23.0	24.0	25.2	24.6	22.9			
G133.0	26.3	24.6	23.0	24.3	25.6	25.1	22.9			
G134.0	26.6	25.0	23.0	24.6	26.0	25.2	22.9			
G135.0	26.9	25.0	23.1	24.9	26.3	25.2	22.9			
G136.0	27.2	25.0	23.4	25.2	26.7	25.3	22.9			
G137.0	27.2	25.0	23.6	25.4	26.9	25.6	22.9			
G138.0	27.6	24.9	23.5	25.7	27.2	25.7	22.8			
G139.0	27.7	25.2	24.0	25.9	27.5	25.9	22.9			
G140.0	28.0	25.2	23.7	26.1	27.3	25.8	22.8			
G141.0	27.9	25.1	24.2	26.1	27.5	26.1	22.8			
G142.0	27.8	25.3	24.3	26.3	27.5	26.1	22.9			
G143.0	27.7	25.2	24.3	26.5	27.6	26.0	22.9			
G144.0	27.6	25.1	24.7	26.5	27.5	26.0	22.8			
G145.0	27.3	25.2	24.6	26.4	27.6	25.8	22.8			
G146.0	27.2	25.2	24.3	26.1	27.2	25.8	22.5			
G147.0	26.7	25.1	24.3	25.8	26.6	25.6	22.3			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	26.1	24.7	24.2	25.7	26.1	25.2	22.2			
G149.0	25.9	24.4	24.4	25.2	25.7	25.0	21.8			
G150.0	25.2	24.0	23.8	24.9	25.2	24.5	21.4			
G151.0	24.8	23.9	23.7	24.6	25.0	24.0	21.4			
G152.0	24.2	23.4	23.2	24.1	24.2	23.8	21.0			
G153.0	23.8	23.3	23.1	23.6	23.9	23.5	20.6			
G154.0	23.4	23.1	22.9	23.4	23.3	23.0	20.6			
G155.0	23.2	22.6	22.6	23.0	22.9	22.6	20.0			
G156.0	22.5	22.4	22.2	22.7	22.6	22.0	19.8			
G157.0	22.0	21.9	21.8	22.7	22.0	21.7	19.8			
G158.0	21.6	21.5	21.7	22.6	21.6	21.4	19.2			
G159.0	21.4	21.5	21.5	22.1	21.1	20.8	19.3			
G160.0	21.0	21.3	21.3	21.8	20.8	20.5	19.1			
G161.0	20.7	21.1	21.1	21.5	20.7	20.5	18.7			
G162.0	20.1	20.5	21.1	21.1	20.2	19.9	18.6			
G163.0	20.1	20.3	20.7	20.9	20.3	19.9	18.4			
G164.0	20.0	19.9	20.0	20.5	19.9	19.7	18.5			
G165.0	19.7	19.9	20.1	20.5	19.8	19.5	18.3			
G166.0	19.6	19.6	19.7	20.2	19.3	19.5	18.3			
G167.0	19.2	19.4	19.2	20.0	19.2	19.1	18.0			
G168.0	19.2	19.3	19.4	19.9	19.5	19.1	18.1			
G169.0	19.0	19.2	19.3	19.6	19.0	18.9	18.0			
G170.0	18.9	18.9	19.1	19.7	19.2	18.7	17.8			
G171.0	19.0	18.9	19.1	19.2	18.9	18.7	17.9			
G172.0	19.0	18.7	18.7	19.2	18.7	18.7	17.9			
G173.0	18.8	18.4	18.6	19.1	18.9	18.7	18.0			
G174.0	18.6	18.2	18.7	19.0	18.7	18.5	18.0			
G175.0	18.6	18.6	18.5	19.0	18.6	18.5	18.1			
G176.0	18.3	18.6	18.4	18.7	18.5	18.4	18.0			
G177.0	18.5	18.3	18.4	19.0	18.6	18.5	18.0			
G178.0	18.3	18.4	18.1	19.0	18.3	18.5	17.9			
G179.0	18.3	18.3	18.2	18.7	18.4	18.3	18.1			
G180.0	18.4	18.2	18.2	18.9	18.5	18.3	18.0			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 8.190 m

Humidity:

Inspector: