




Internal-Line: Surface Mount LED Panels

Only 1.34" Thick!

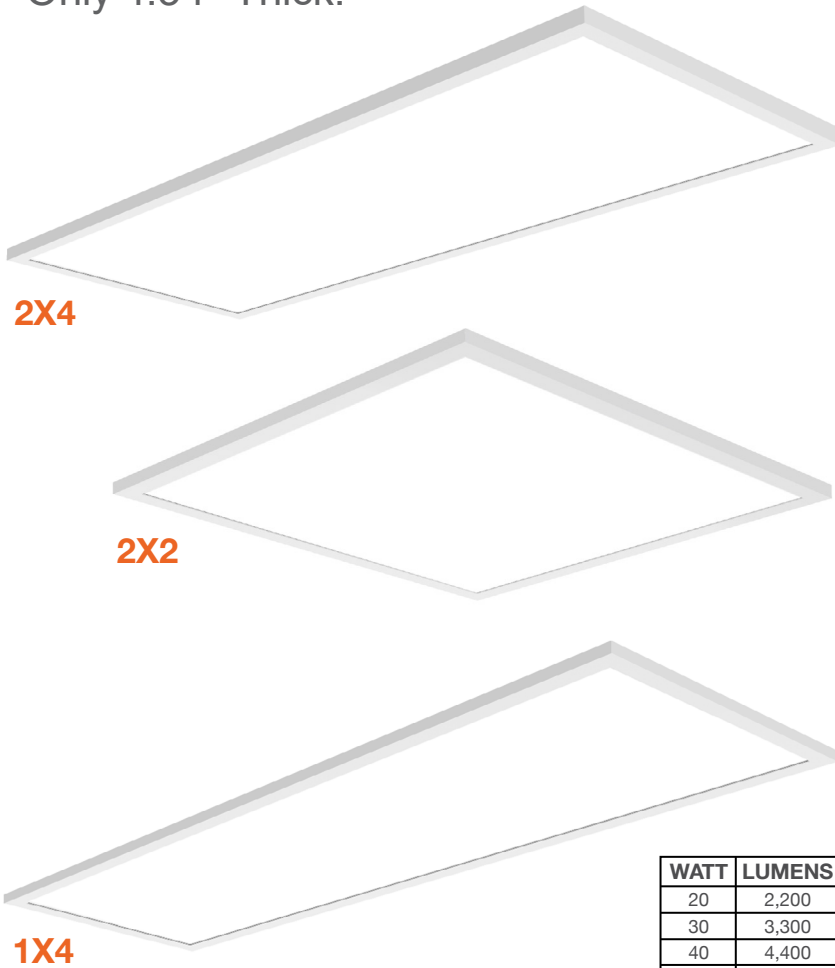

WATT	LUMENS
20	2,200
30	3,300
40	4,400
50	5,500

Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location IP44
- 5-CCT: 27/30/35/40/50K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS diffuser
- Average life (L70) of 50,000 hours

Applications:

- General Indoor Lighting
- Utility & Storage
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Residential and Commercial

Product Information:

- Aluminum housing finished with corrosion free powder coat
- Even light distribution
- Lightweight for easier installation
- Super slim only 1.34" thick!
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

Driver Options:

- 120-277V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installations:

- 30/40 Junction Box
- Surface mount bracket included

Certifications:

- UL Listed for USA and CA
- DLC Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-BPL-SM-2X2-3M40-5CCT
40/30/20W
LED-BPL-SM-1X4-3M40-5CCT
40/30/20W
LED-BPL-SM-2X4-3M50-5CCT
50/40/30W

Emergency Backups

EMB
9W Emergency
LED-EMB-9W-LV-S-20-300-2P

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

Powder-Coated White Frame

● 2700K
● 3000K
● 3500K
● 4000K
● 5000K

5-CCT
Selectable

● LOW
20W
● MID
30W
● HIGH
40W

3 Watt
Selectable



Unique Back-Lit Design

Only 1.34" Thick




Frosted Lens

2 Carabiner
Safety Locks


DIMENSIONS

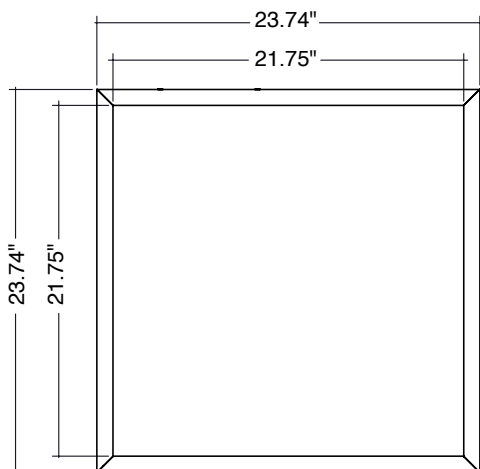

2X2

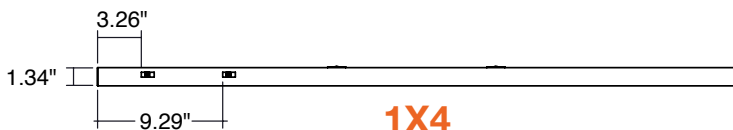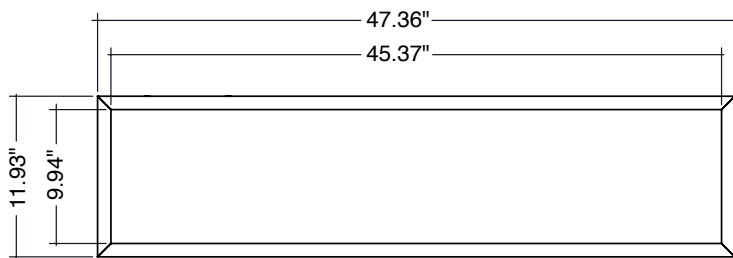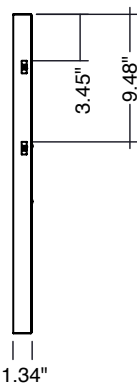


1X4

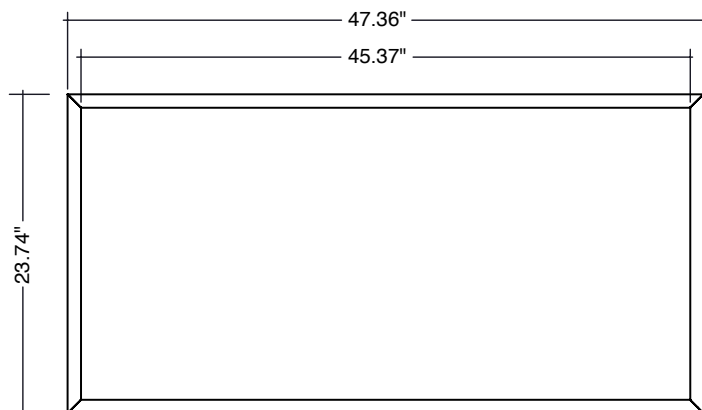

2X4

Model	Voltage	Watts	Lumens	Color	CRI
LED-BPL-SM-1X4-3M40-5CCT	120/277V	40/30/20w	4,400/3,300/2,200	27/30/35/40/50k	>80
LED-BPL-SM-2X2-3M40-5CCT	120/277V	40/30/20w	4,400/3,300/2,200	27/30/35/40/50k	>80
LED-BPL-SM-2X4-3M50-5CCT	120/277V	50/40/30w	5,500/4,400/3,300	27/30/35/40/50k	>80

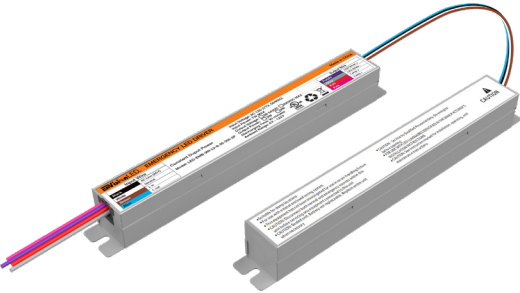

LED-EMB-9W-LV-S-20-300-2P

EMERGENCY BACK UP

Accessory	Description
LED-EMB-9W-LV-S-20-300-2P	Emergency Back Up: 120v OUTPUT (Works with all 0-10V Dim or <9W fixtures -2 Piece Split Design