


SnapTrim-Line: 3" Cylinder Downlight

Adjustable J-Box Model

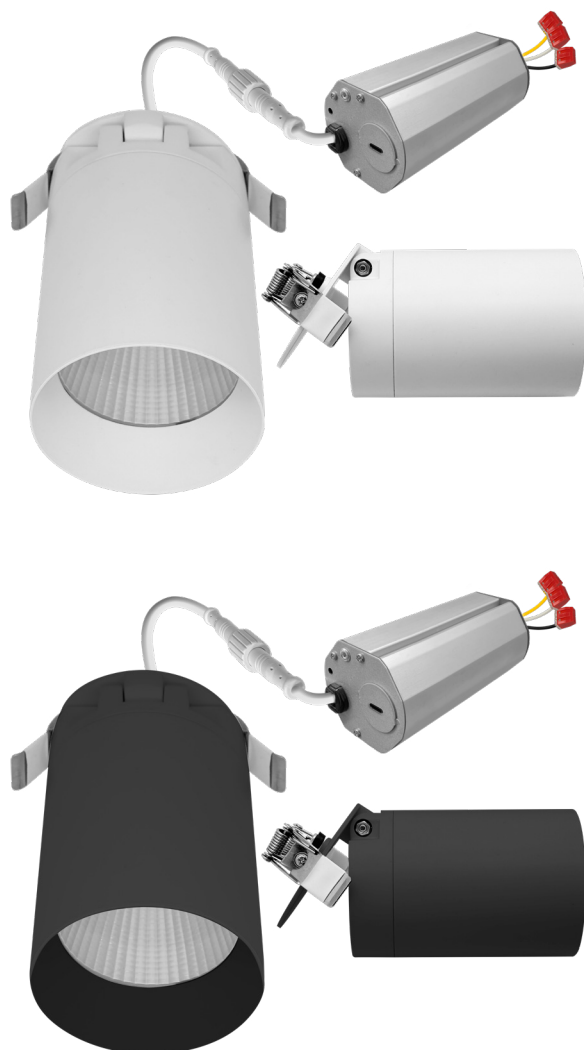

Detail Specifications:

- Finish: White or Black
- Trim: Round
- Wattage: 15
- Lumens: 1,000
- Wet Location Rated
- Beam Angle: 38° standard
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Angle adjustable up to 90°
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates traditional j-box

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions: 2-3/8"
- Optional new construction plate available
- This fixture does not work with a traditional j-box
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Item	Emergency
LED-DLJBX-3-CYL-ADJ-5CCT-WH	Blank
White Finish	None
LED-DLJBX-3-CYL-ADJ-5CCT-BL	EMB
Black Finish	Emergency Backup


Optional Accessories (Order Separately)

New Construction Plates	Extension Cables	Emergency Backup 1 (field install)
CUNV-NC-ICAT-7H	JBX-EXT-6'-2PIN	LED-EMB-15W-HV
Universal Plate	6' Extension	-0/10V-2P
with Hanging Bars	JBX-EXT-10'-2PIN	Up to 24W fixtures
CUNV-JBX-RI-XL	10' Extension	
Universal Rough In	JBX-EXT-12'-2PIN	
Plate Extra Long	12' Extension	


1. Field installable.
Lasts 90 minutes

Specs and model numbers are subject to change with or without notice.

FEATURES

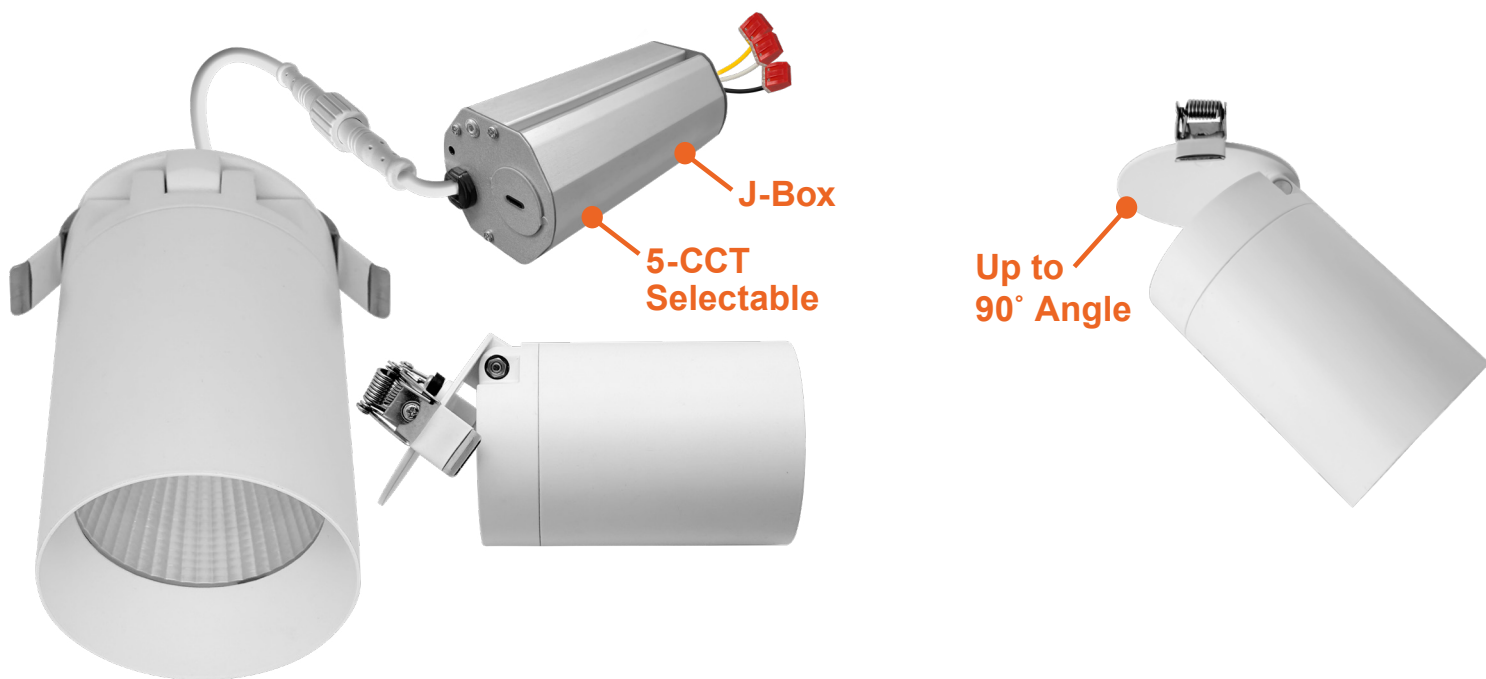


DIMENSIONS

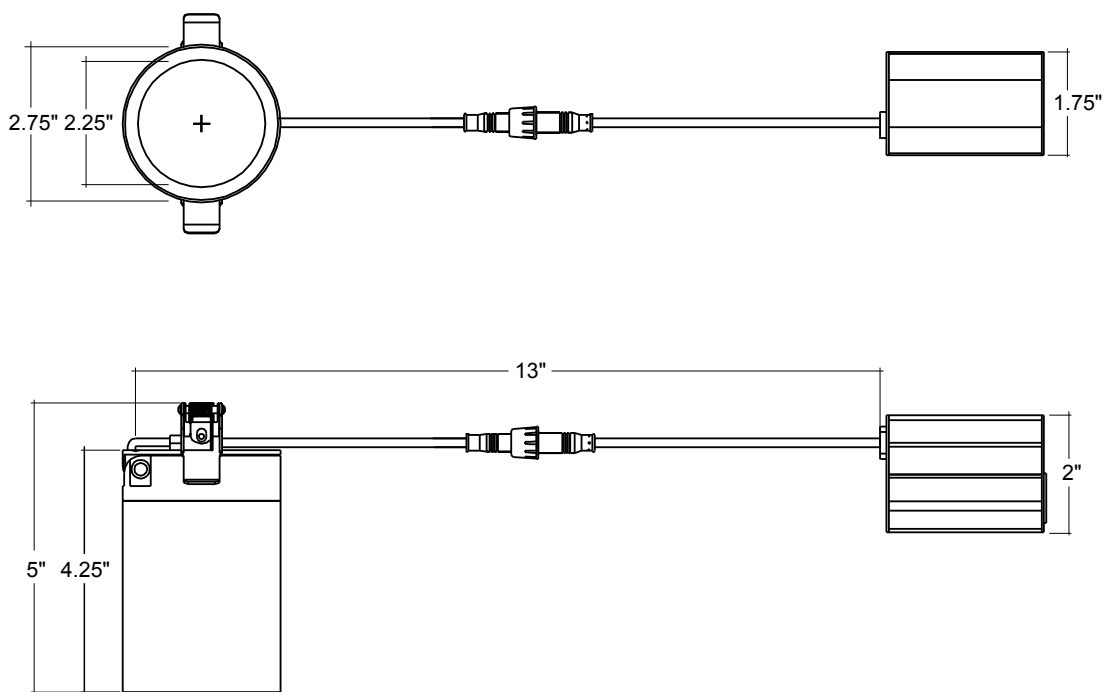


SKU: LED-DLJBX-3-CYL-ADJ-5CCT (15W)
LUMENS: 942
WATTAGE: 13.28
LER: 71
CCT/CRI: 27/30/35/40/50K / >90CRI
SPACING CRITERIA: 0.64 (0-180), 0.64 (90-270)

Illumination at a Distance		
Distance from Luminaire	Center Beam (fc)	Diameter of Beam (ft)
4'	162.47	2.75
6'	72.24	4.13
8'	39.77	5.51
10'	25.57	6.89
12'	17.74	8.26




Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-20	703.70	74.7
0-30	917.63	97.4
0-40	932.81	99.0
0-60	941.30	99.9
0-80	942.02	100.0
0-90	942.05	100.0

ACCESSORIES

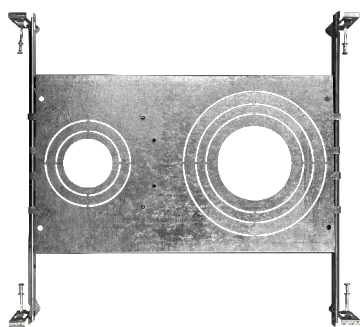

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

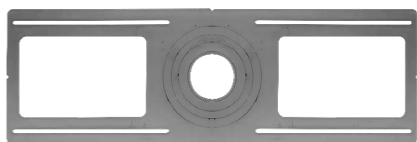

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-15W-HV-0/10V-2P

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-3-CYL-ADJ-5CCT-WH	120V	15w	1000	50/40/35/30/27K	>90
LED-DLJBX-3-CYL-ADJ-5CCT-BL	120V	15w	1000	50/40/35/30/27K	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 15W fixtures

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			