



















LED-ALIN2-FL LINEAR LIGHT INSTALLATION INSTRUCTIONS




- 2- ALIN2 SUSPENDED MOUNT INSTALLATION GUIDE**
- 3- ALIN2 UP LIGHT KIT INSTALLATION GUIDE**
- 4- ALIN2 WALL MOUNT KIT INSTALLATION GUIDE**
- 5- ALIN2 JOINING BRACKET INSTALLATION GUIDE**
- 6- ALIN2 SURFACE MOUNT KIT INSTALLATION GUIDE**
- 7- ALIN2 LED LINEAR LIGHT TRIM INSTALLATION GUIDE**
- 8- ALIN2 LED LINEAR LIGHT TRIMLESS INSTALLATION GUIDE**
- 9- ALIN2 LED LINEAR T-GRID SURFACE MOUNT INSTALLATION GUIDE**
- 10- ALIN2 T-GRID BRACKET INSTALLATION GUIDE**



15. Installation complete


ALIN2 UP LIGHT KIT INSTALLATION GUIDE

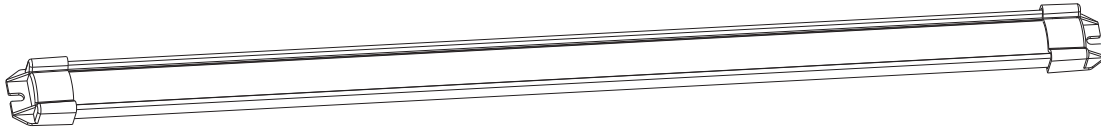

Suspension Canopy Kits

The suspension kit can be adjusted in length.
Finish only applies to the canopy. Cord included
will be black on colored finishes unless specified.

MODEL #	UP LIGHT MODEL #
LED-ALIN2-1FT-3P25	Qty 1: ALIN2-1FT-UL
LED-ALIN2-2FT-3P25	Qty 1: ALIN2-2FT-UL
LED-ALIN2-3FT-3P38	Qty 1: ALIN2-1FT-UL Qty 1: ALIN2-2FT-UL
LED-ALIN2-4FT-3P50	Qty 1: ALIN2-4FT-UL
LED-ALIN2-6FT-3P75	Qty 1: ALIN2-2FT-UL Qty 1: ALIN2-2FT-UL
LED-ALIN2-8FT-3P100	Qty 2: ALIN2-4FT-UL
LED-ALIN2-FL-12X12-L-3P25	Qty 1: ALIN2-1FT-UL
LED-ALIN2-FL-12X12-120L-3P25	Qty 1: ALIN2-1FT-UL
LED-ALIN2-FL-12X12-135L-3P25	Qty 1: ALIN2-1FT-UL
LED-ALIN2-24X24-L-3P50	Qty 2: ALIN2-2FT-UL
LED-ALIN2-22X10-T-3P36	Qty 2: ALIN2-2FT-UL
LED-ALIN2-22X22-X-3P50	Qty 2: ALIN2-2FT-UL

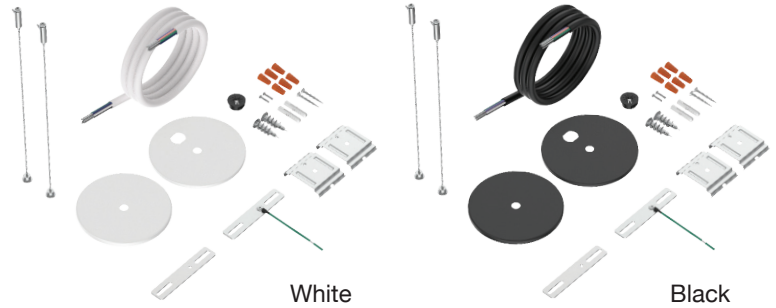


5-Wire


MODEL #	FINISH ¹
SCK-5-6FT 5-Wire Power Cord	WH White BL Black CUSTOM
SCK-5-12FT 5-Wire Power Cord	Custom Color View our RAL Chart
SCK-5-20FT 5-Wire Power Cord	Custom Color View our RAL Chart

6-Wire (For EMB Option)


MODEL #	FINISH ¹
SCK-6-6FT 5-Wire Power Cord	WH White BL Black CUSTOM
SCK-6-12FT 5-Wire Power Cord	Custom Color View our RAL Chart
SCK-6-20FT 5-Wire Power Cord	Custom Color View our RAL Chart

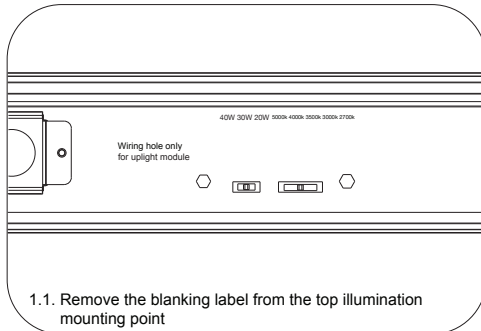


1.1. Remove the blanking label from the top illumination mounting point

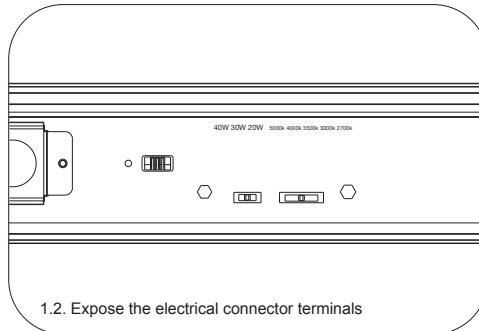


1.2. Expose the electrical connector terminals

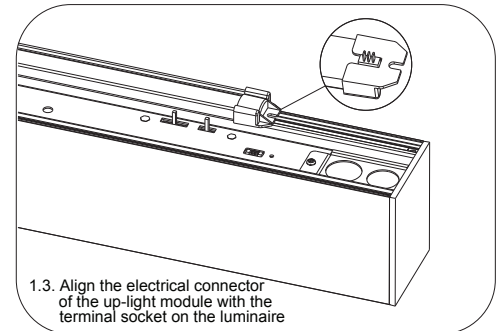


1.3. Align the electrical connector of the up-light module with the terminal socket on the luminaire

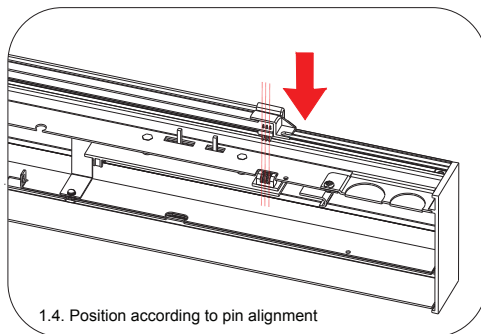


1.4. Position according to pin alignment

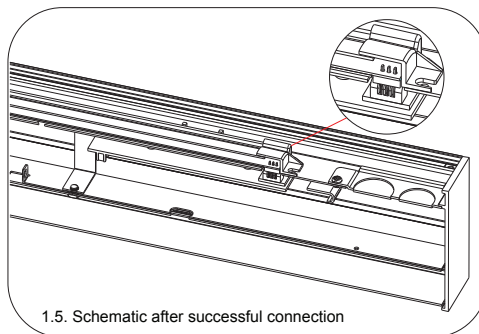

1.5. Schematic after successful connection











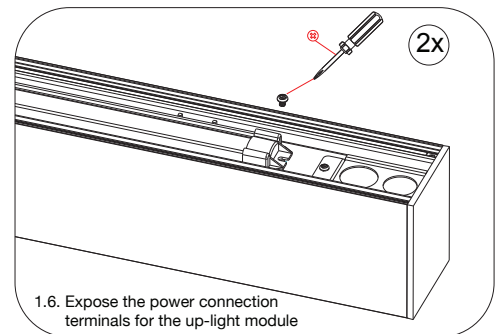


1.6. Expose the power connection terminals for the up-light module

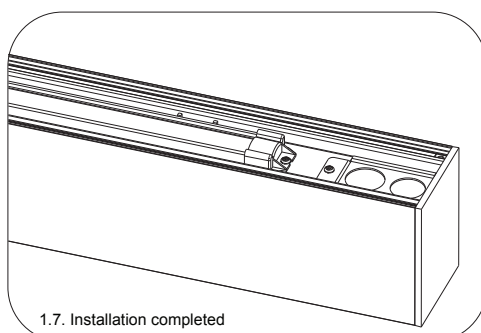

1.7. Installation completed















Model: ALIN2-WM



ALIN2 JOINING BRACKET INSTALLATION GUIDE














REQUIRED TO JOIN TWO FIXTURES TOGETHER

Model: ALIN2-JOIN

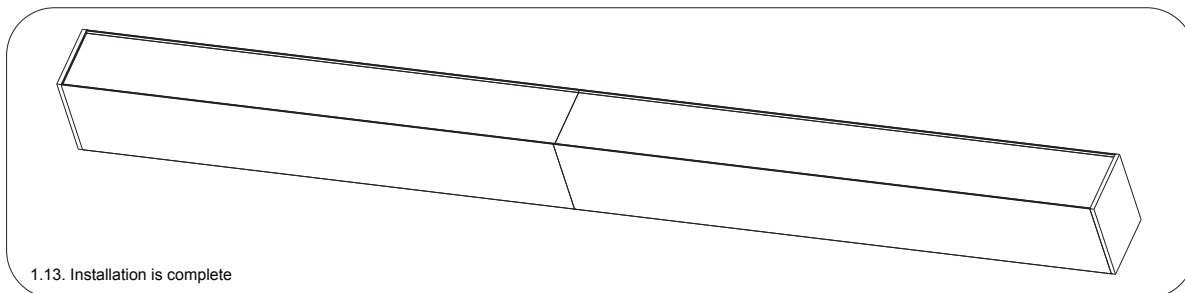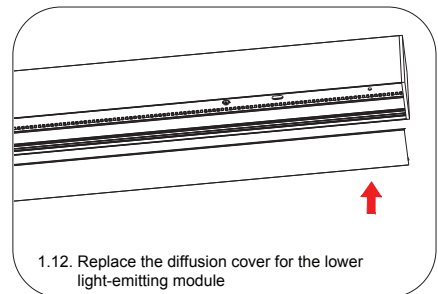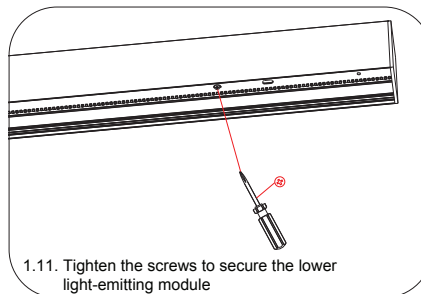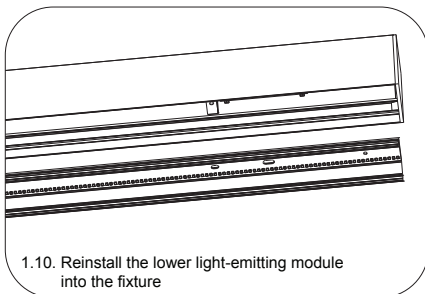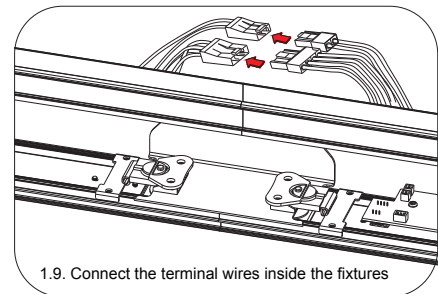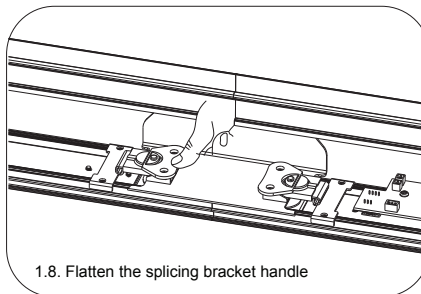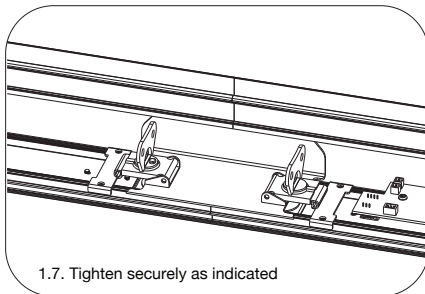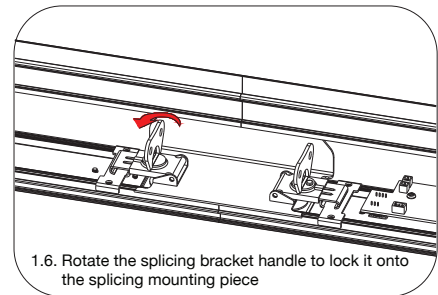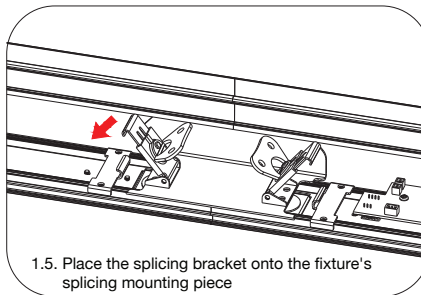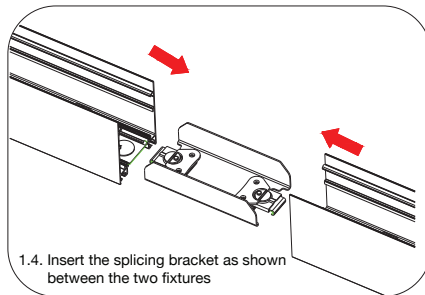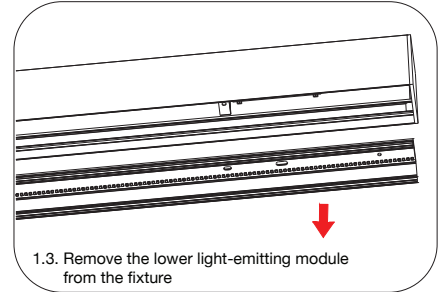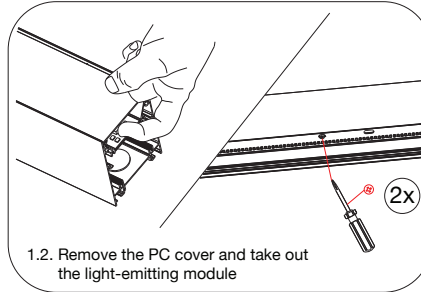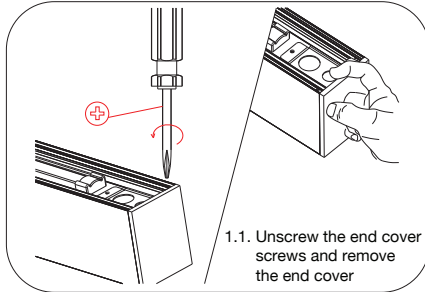


ALIN2 SURFACE MOUNT KIT INSTALLATION GUIDE

Model: ALIN2-SM

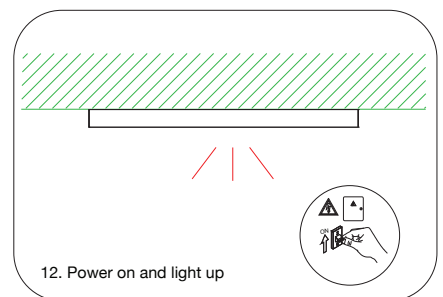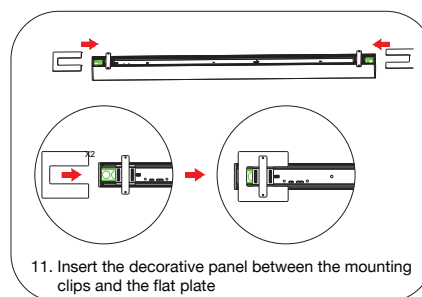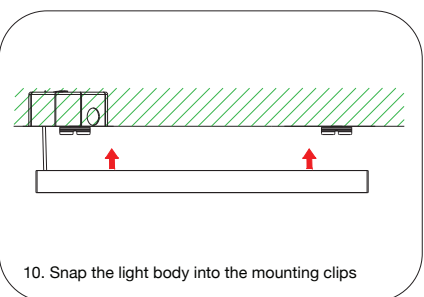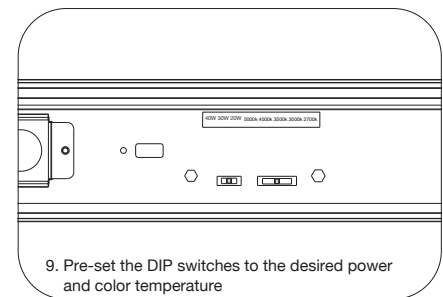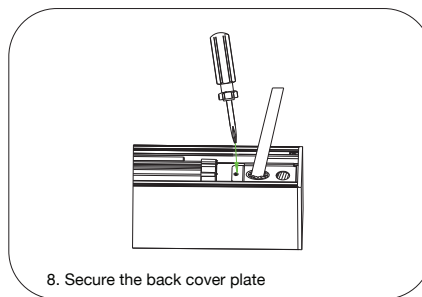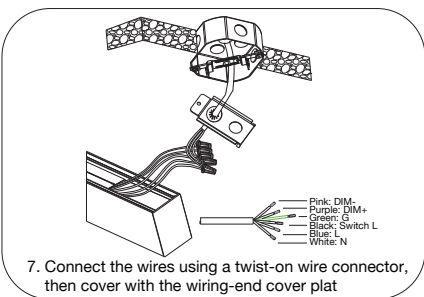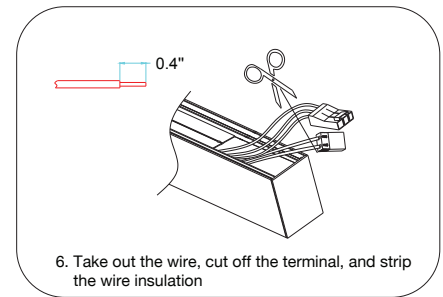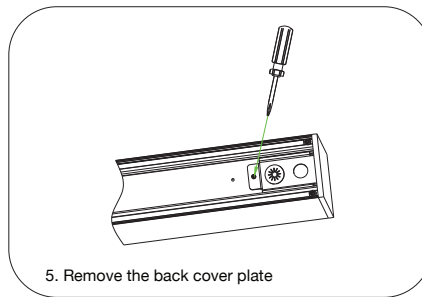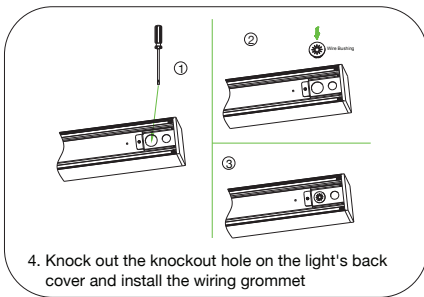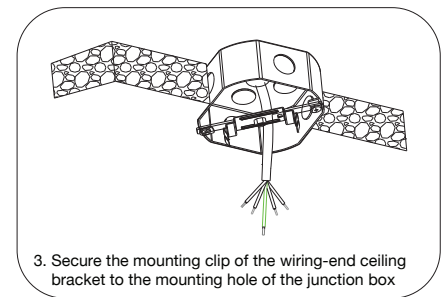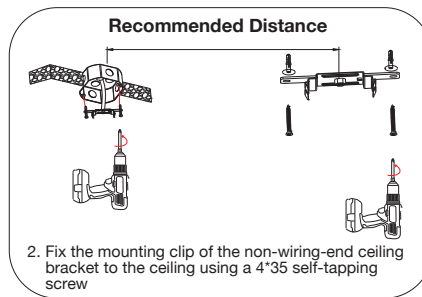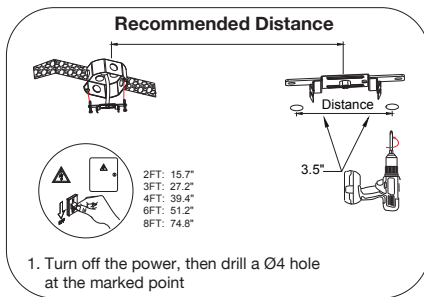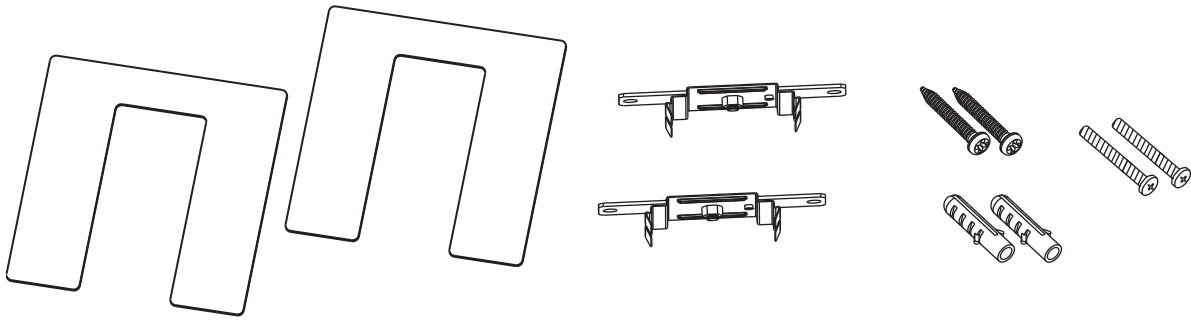

ALIN2 LED LINEAR LIGHT TRIM INSTALLATION GUIDE

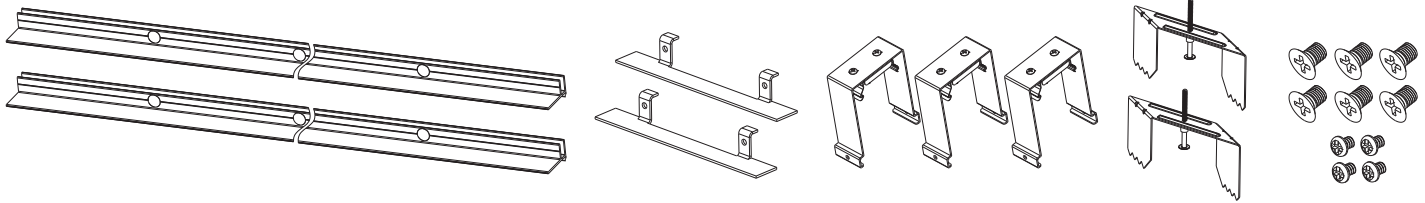

	L	W
1FT	12.4"	3.4"
2FT	24.2"	
3FT	36"	
4FT	48"	
6FT	71.45"	
8FT	95"	

1.1. Drilling holes in the ceiling
(Recommended dimensions)

2. Remove the PC cover

2.1. Unscrew the lock to remove the light engine module

2.2. Dismantle the lower light engine module of the fixture

3. Assemble the side extension brackets

4. Pre-set the DIP switches to the desired power and color temperature

5. Attach the side extension brackets to the light body

6. Knock out the required knockouts on the back of the light body

7. Assemble the side extension rotation fixing brackets

8. Install the side covers on the extension brackets

9. Insert the fixture with assembled extension brackets into the pre-cut ceiling opening














10. Wire connection

11. Reinstall the lower light engine module of the fixture

12. Secure the lower light engine module with screws and reinstall the fixture's diffuser















13. Installation complete

ALIN2 LED LINEAR LIGHT TRIMLESS INSTALLATION GUIDE

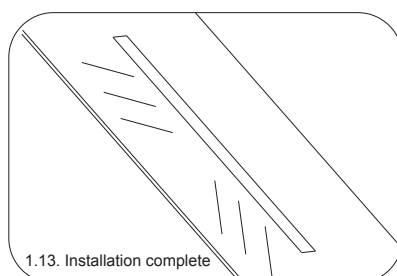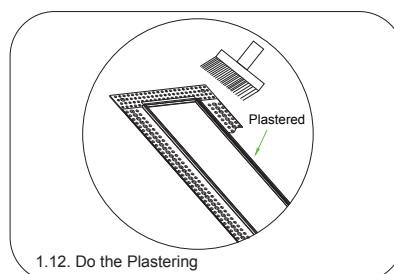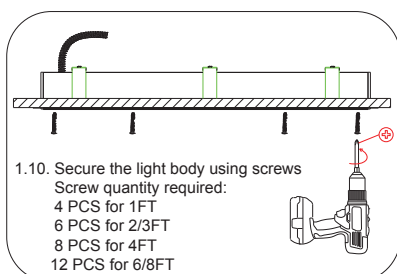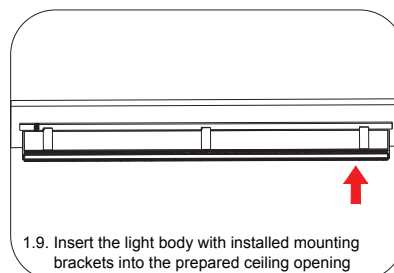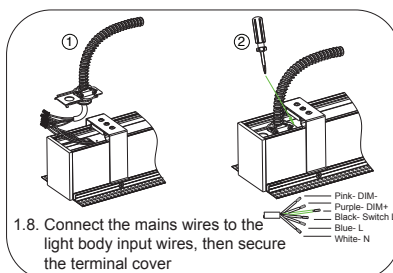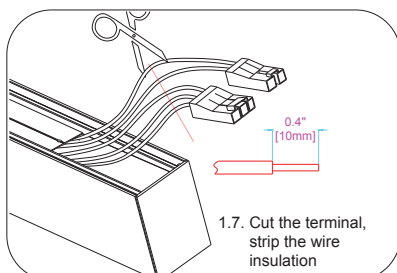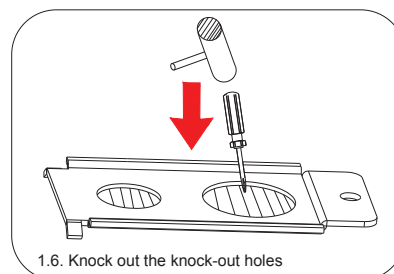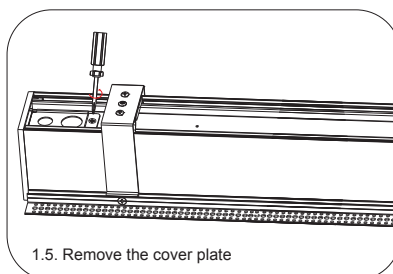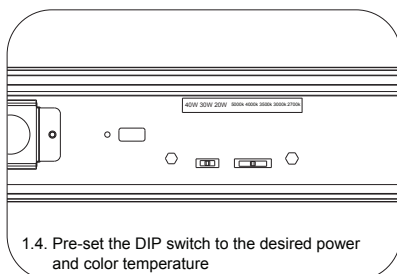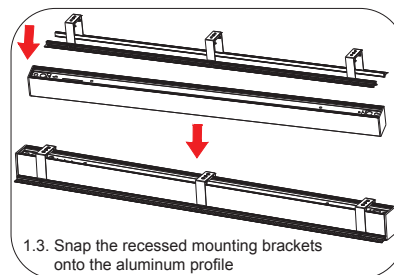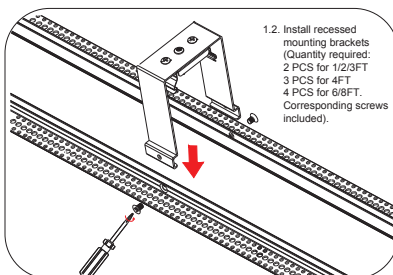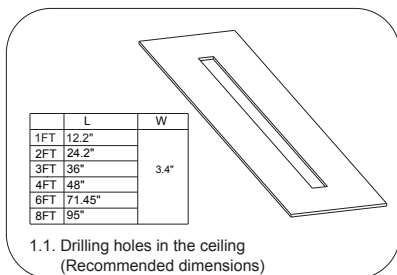
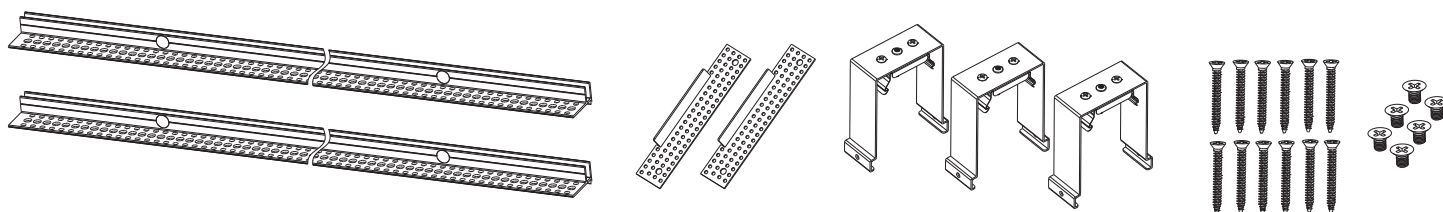


ALIN2 LED LINEAR T-GRID SURFACE MOUNT INSTALLATION GUIDE

15/16 & 9/16 Grid Clips

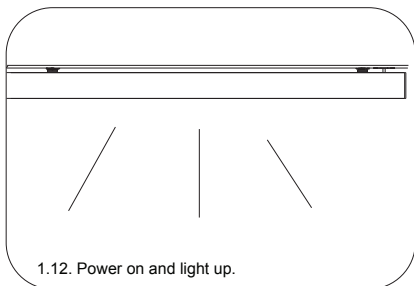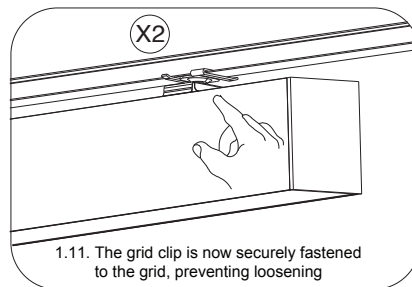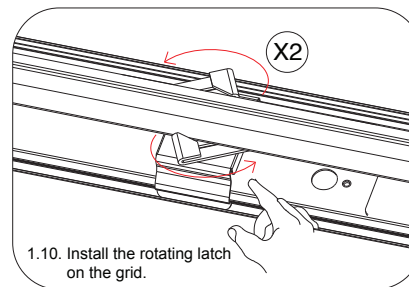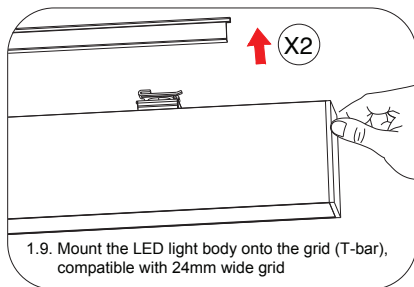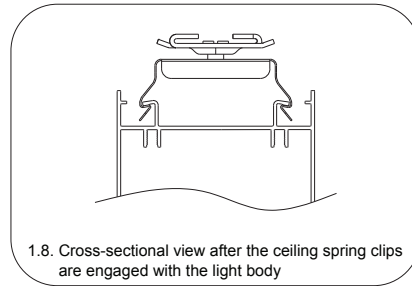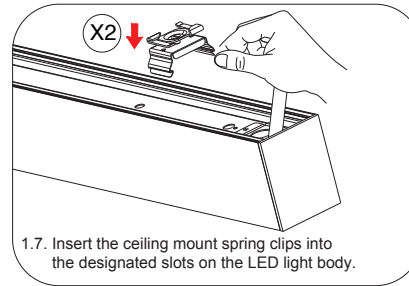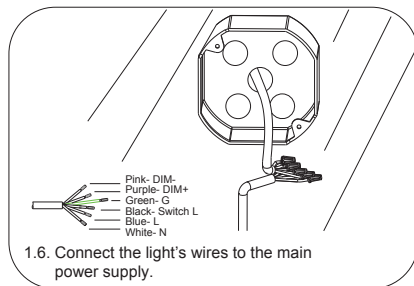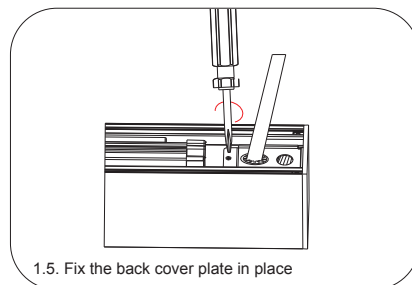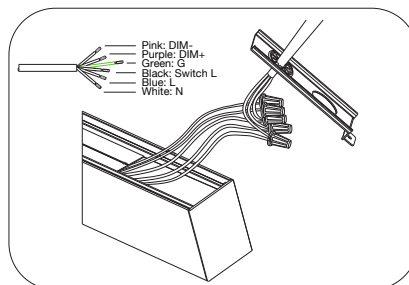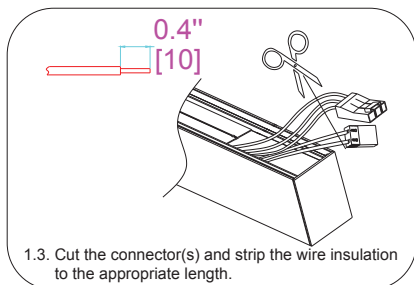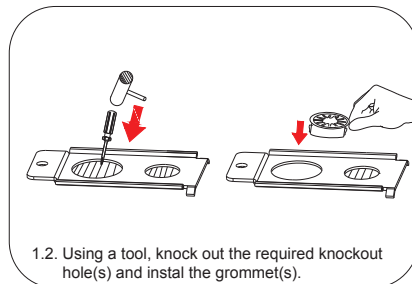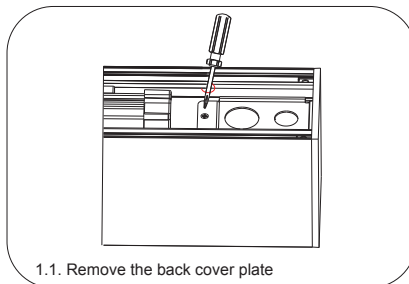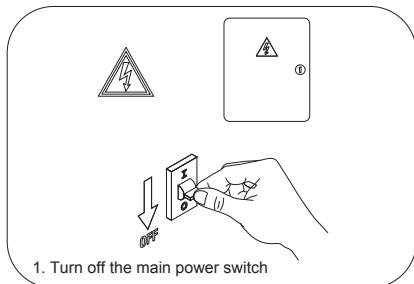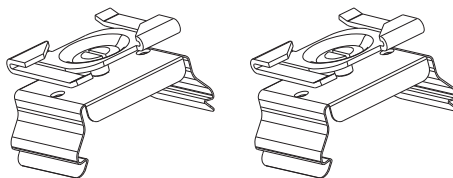

ALIN2 T-GRID BRACKET INSTALLATION GUIDE

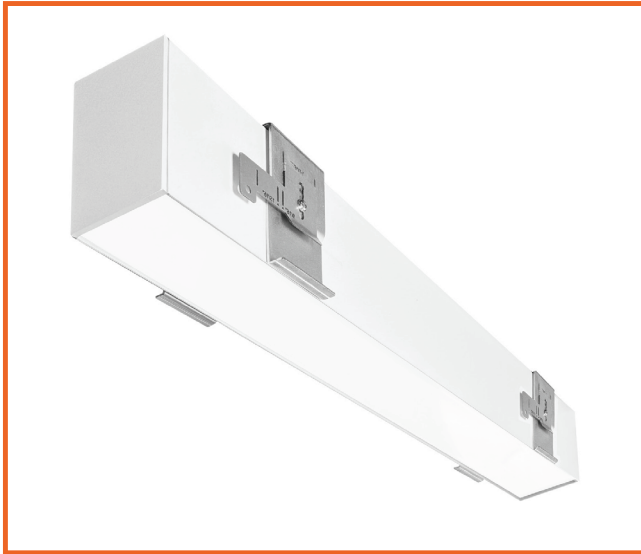
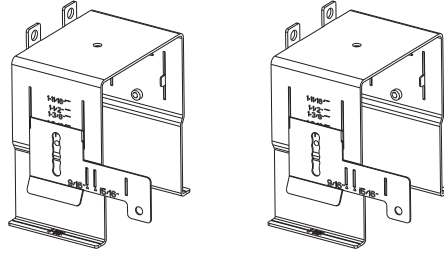


Recessed T-Bar Kit (Factory or Field Install)


Recessed T-bar installation for 9/16 or 15/16 applications may be installed in the field or the factory. Specify on your order:

-TB: T-grid kit will be installed onto the fixture.
For field install, order the following:


FIELD INSTALL MODEL #
ALIN-TB-RTK

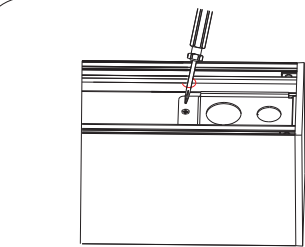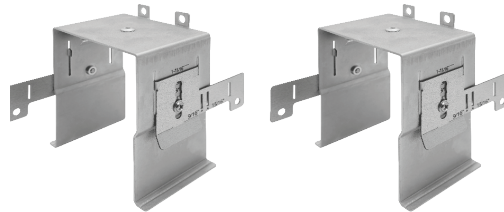


1.1. Remove the back cover plate

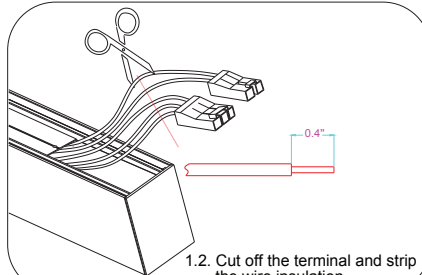


1.2. Cut off the terminal and strip the wire insulation

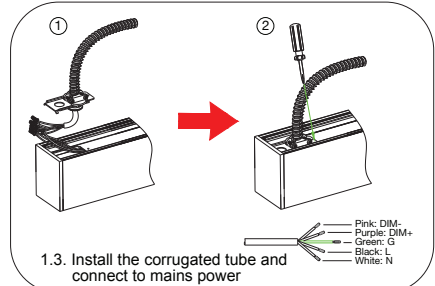


1.3. Install the corrugated tube and connect to mains power

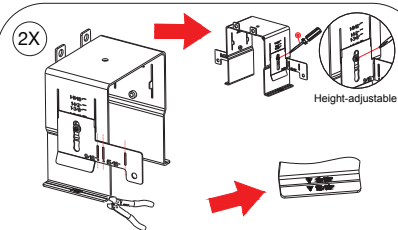


1.4. Use pliers to bend and adjust the brackets 9/19 & 15/16 according to the actual bracket width and adjust the bracket height

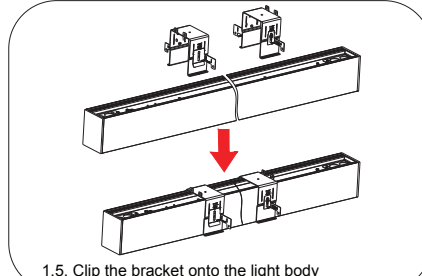


1.5. Clip the bracket onto the light body

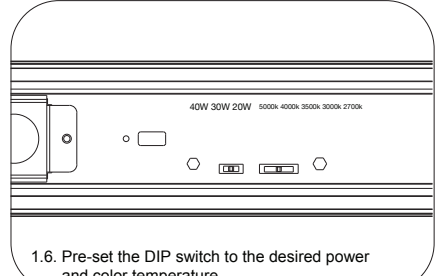

1.6. Pre-set the DIP switch to the desired power and color temperature

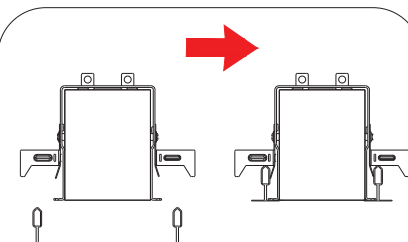

1.7. Secure to the ceiling grid (T-grid)

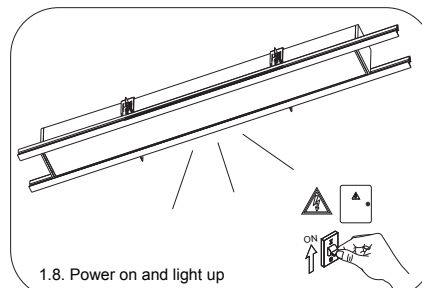

1.8. Power on and light up