


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.03 lm/W			
MODEL	BL-WR-486-48W-840N	I _{max} (cd)	1870	S/MH(C0/180)	1.20
NOMINAL POWER(W)	48	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4809.4	η UP, DN(C0-180)	1.1, 52.1
NOMINAL FLUX(lm)	4809.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.9, 45.9
LAMPS INSIDE	1	η up(%)	2.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.1	η down(%)	98.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

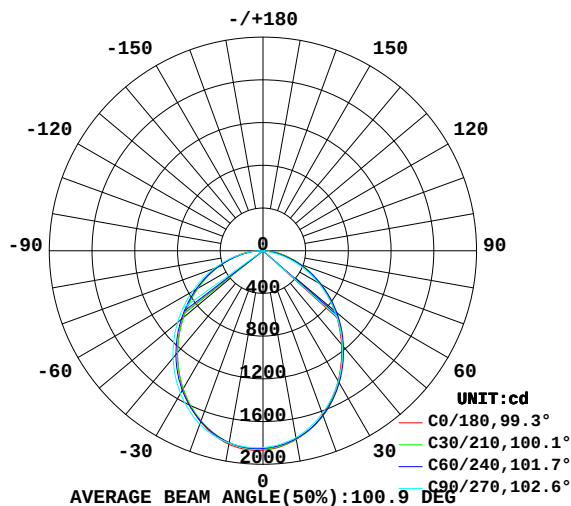

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

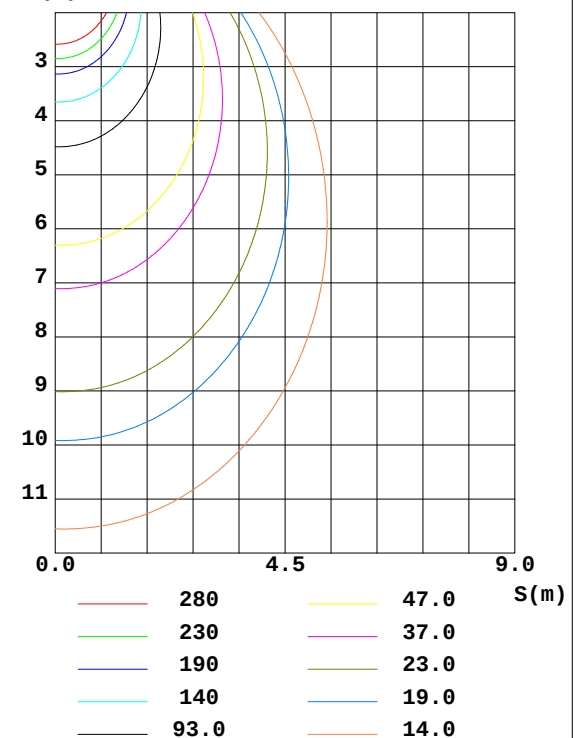

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators: ALLEN
 Test Date:2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	ϕ zone	ϕ total	%lum, lamp
5	1868	1853	1844	1838	1843	1832	1820	1819	0- 5	44.09	44.09	0.92,0.92
10	1839	1825	1827	1812	1794	1789	1774	1774	5- 10	130.3	174.3	3.63,3.63
15	1784	1772	1789	1764	1724	1726	1707	1707	10- 15	210.4	384.8	8.8
20	1705	1698	1727	1695	1635	1643	1621	1620	15- 20	281.1	665.9	13.8,13.8
25	1607	1606	1644	1609	1528	1541	1521	1518	20- 25	339.5	1005	20.9,20.9
30	1497	1502	1545	1506	1406	1424	1409	1404	25- 30	383.5	1389	28.9,28.9
35	1375	1384	1432	1390	1277	1297	1287	1280	30- 35	412.2	1801	37.4,37.4
40	1246	1257	1310	1264	1144	1167	1155	1148	35- 40	425.2	2226	46.3,46.3
45	1111	1122	1181	1132	1010	1033	1017	1012	40- 45	423.1	2649	55.1,55.1
50	975.6	984.6	1044	997.7	878.6	897.3	876.0	875.2	45- 50	407.1	3056	63.6,63.6
55	840.8	848.8	904.2	863.5	748.4	762.2	736.3	739.3	50- 55	379.1	3436	71.4,71.4
60	709.3	714.2	764.1	730.3	619.5	627.3	597.0	604.9	55- 60	340.6	3776	78.5,78.5
65	580.8	581.4	624.9	598.4	495.2	496.3	459.5	474.1	60- 65	293.5	4070	84.6,84.6
70	456.6	450.5	487.4	469.3	375.1	369.6	323.8	346.5	65- 70	239.6	4309	89.6,89.6
75	338.5	324.4	351.7	344.6	261.3	248.5	195.0	225.4	70- 75	181.3	4491	93.4,93.4
80	228.7	205.8	217.9	225.5	165.3	143.8	83.16	123.5	75- 80	122.3	4613	95.9,95.9
85	136.9	107.9	103.1	124.3	90.41	64.31	11.78	51.73	80- 85	69.41	4682	97.4,97.4
90	70.44	43.68	21.48	52.32	42.14	21.46	3.156	18.99	85- 90	31.42	4714	98.98
95	33.05	16.74	3.567	17.88	10.00	8.241	4.342	9.234	90- 95	11.65	4725	98.3,98.3
100	15.20	9.732	5.127	8.519	10.02	7.047	5.777	8.203	95-100	5.528	4731	98.4,98.4
105	12.56	8.834	6.886	8.269	9.295	7.584	7.033	8.311	100-105	4.468	4735	98.5,98.5
110	12.22	9.775	8.416	9.247	9.804	8.850	8.409	8.885	105-110	4.644	4740	98.6,98.6
115	12.67	10.45	10.11	10.59	10.32	10.22	9.900	9.639	110-115	4.991	4745	98.7,98.7
120	12.58	11.86	11.79	12.36	11.66	11.98	11.46	11.01	115-120	5.381	4750	98.8,98.8
125	13.73	13.49	13.48	14.22	13.45	13.80	13.11	12.52	120-125	5.839	4756	98.9,98.9
130	15.50	15.15	15.17	16.13	15.24	15.82	14.78	14.18	125-130	6.245	4762	99.99
135	17.23	16.79	16.81	17.97	17.24	17.73	16.57	16.36	130-135	6.542	4769	99.2,99.2
140	18.90	18.90	18.51	19.64	19.26	19.55	19.23	17.92	135-140	6.663	4776	99.3,99.3
145	20.47	20.00	20.19	21.36	20.62	21.72	20.78	19.14	140-145	6.616	4782	99.4,99.4
150	22.38	21.90	21.93	22.62	22.15	22.64	21.89	20.86	145-150	6.273	4789	99.6,99.6
155	23.71	23.48	23.25	23.73	23.72	24.68	23.34	22.45	150-155	5.766	4794	99.7,99.7
160	27.57	24.90	24.50	24.94	25.27	25.11	24.75	23.82	155-160	5.115	4799	99.8,99.8
165	26.66	26.08	25.54	25.66	26.44	26.11	25.72	26.08	160-165	4.185	4804	99.9,99.9
170	27.36	27.26	26.40	26.53	28.17	27.18	26.62	26.61	165-170	3.156	4807	99.9,99.9
175	28.67	28.52	26.97	27.88	30.42	29.93	27.11	27.12	170-175	1.969	4809	100.100
180	28.61	27.96	27.58	27.53	28.81	27.97	27.20	27.59	175-180	0.6727	4809	100.100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators: ALLEN
 Test Date:2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.04	.99	.96	1.01	.97	.94	.97	.93	.91	.92	.90	.87	.88	.86	.85	.82
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.66	.78	.71	.65	.75	.69	.63	.72	.67	.62	.69	.65	.61	.58
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.64	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.56	.50	.46	.44
6.0	.57	.49	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.51	.45	.40	.38
7.0	.52	.44	.37	.51	.43	.37	.50	.42	.37	.48	.41	.36	.46	.41	.36	.34
8.0	.48	.39	.34	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.41	.33	.28	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

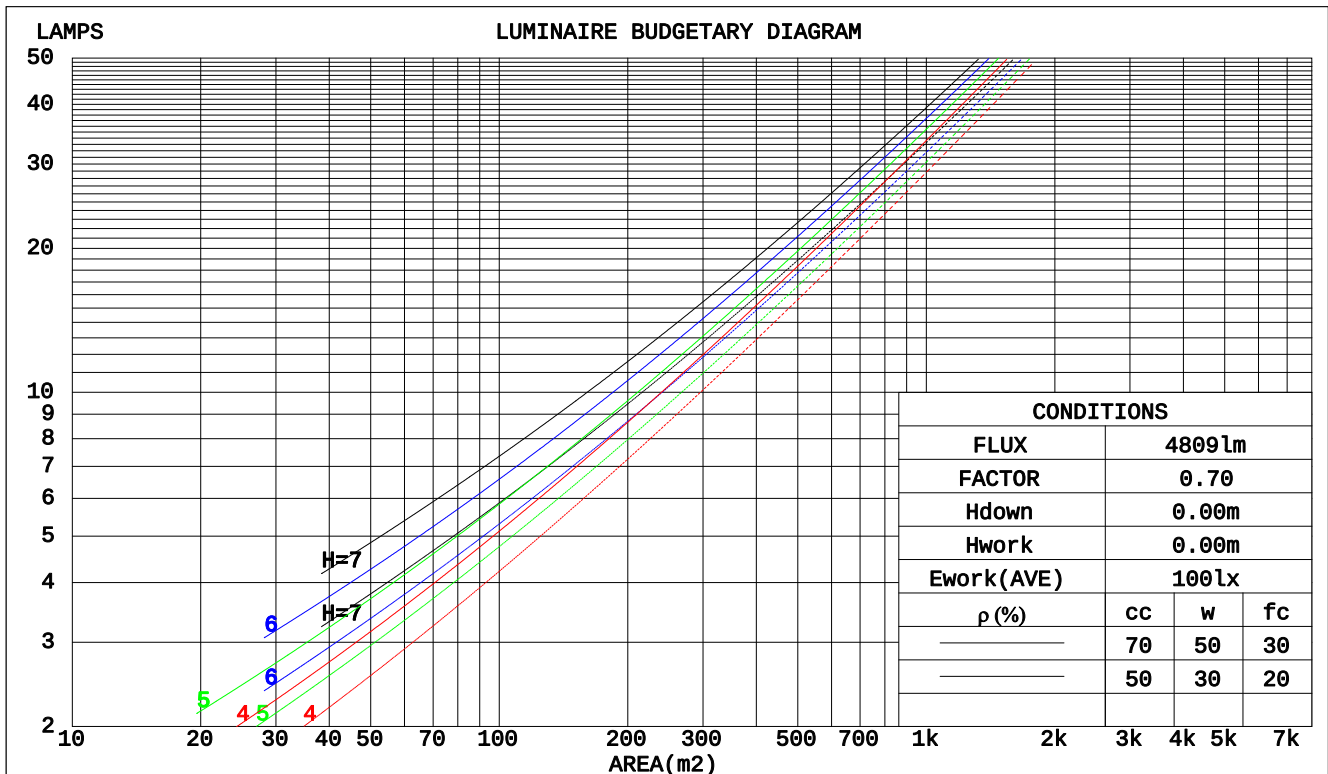

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: ALLEN
 Test Date: 2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.266
 Humidity: 65.0%
 Test Distance: 9.680m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm									
NAME:				TYPE:				WEIGHT:	
DIM.:				SPEC.:				SERIAL No.:	
MFR.:				SUR.:				PROTECTION ANGLE:	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.304	.173	.055	.296	.169	.054	.282	.162	.052	.268	.155	.050	.256	.149	.048		
2.0	.285	.156	.048	.278	.153	.047	.265	.147	.046	.253	.142	.045	.243	.137	.043		
3.0	.263	.140	.042	.257	.138	.041	.246	.133	.041	.236	.129	.040	.226	.125	.039		
4.0	.243	.126	.037	.238	.125	.037	.228	.121	.036	.219	.117	.035	.210	.114	.035		
5.0	.225	.115	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031		
6.0	.209	.105	.030	.205	.103	.030	.197	.101	.029	.189	.098	.029	.182	.096	.029		
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026		
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.161	.082	.024		
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022		
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.206	.206	.206	.176	.176	.176	.120	.120	.120	.069	.069	.069	.022	.022	.022	
1.0	.195	.171	.150	.167	.147	.129	.114	.101	.089	.066	.059	.052	.021	.019	.017	
2.0	.187	.147	.114	.160	.127	.099	.110	.088	.069	.063	.051	.040	.020	.017	.013	
3.0	.179	.130	.091	.153	.112	.079	.105	.078	.055	.061	.045	.033	.020	.015	.011	
4.0	.171	.116	.075	.147	.101	.065	.101	.070	.046	.058	.041	.027	.019	.013	.009	
5.0	.163	.106	.064	.140	.092	.055	.097	.064	.039	.056	.038	.023	.018	.012	.008	
6.0	.156	.098	.055	.134	.085	.048	.093	.059	.034	.054	.035	.020	.017	.011	.007	
7.0	.150	.091	.049	.129	.079	.043	.089	.055	.031	.052	.032	.018	.017	.011	.006	
8.0	.143	.085	.045	.123	.074	.039	.085	.052	.028	.050	.031	.017	.016	.010	.005	
9.0	.137	.080	.041	.118	.069	.036	.082	.049	.026	.048	.029	.015	.015	.009	.005	
10.0	.132	.076	.038	.113	.066	.034	.079	.046	.024	.046	.027	.014	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: ALLEN
Test Date:2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm											
NAME:					TYPE:			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:			
MFR.:					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	22.1	23.5	22.4	23.8	24.0	22.4	23.8	22.7	24.1	24.3
	3H	23.6	25.0	23.9	25.2	25.5	23.9	25.3	24.3	25.6	25.8
	4H	24.3	25.6	24.6	25.9	26.2	24.6	25.9	24.9	26.2	26.5
	6H	24.8	26.1	25.2	26.4	26.7	25.1	26.3	25.4	26.6	26.9
	8H	25.1	26.3	25.5	26.6	26.9	25.3	26.4	25.6	26.7	27.1
	12H	25.3	26.4	25.7	26.8	27.1	25.4	26.5	25.8	26.8	27.2
4H	2H	22.7	24.0	23.0	24.3	24.6	22.9	24.2	23.3	24.5	24.8
	3H	24.4	25.5	24.8	25.9	26.2	24.7	25.8	25.0	26.1	26.5
	4H	25.2	26.2	25.6	26.6	27.0	25.4	26.5	25.8	26.8	27.2
	6H	25.9	26.8	26.3	27.2	27.6	26.1	27.0	26.5	27.4	27.8
	8H	26.2	27.1	26.7	27.5	27.9	26.3	27.1	26.7	27.5	28.0
	12H	26.5	27.3	27.0	27.7	28.2	26.5	27.2	26.9	27.7	28.1
8H	4H	25.5	26.3	25.9	26.7	27.2	25.7	26.5	26.1	26.9	27.4
	6H	26.4	27.1	26.8	27.5	28.0	26.5	27.2	26.9	27.6	28.1
	8H	26.8	27.4	27.3	27.8	28.3	26.8	27.4	27.3	27.9	28.4
	12H	27.2	27.7	27.7	28.2	28.7	27.1	27.6	27.6	28.1	28.6
12H	4H	25.5	26.3	26.0	26.7	27.1	25.7	26.5	26.2	26.9	27.4
	6H	26.4	27.0	26.9	27.5	28.0	26.5	27.2	27.0	27.6	28.1
	8H	26.9	27.4	27.4	27.9	28.4	26.9	27.4	27.4	27.9	28.4
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 4809 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.5)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: ALLEN
Test Date:2018-07-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

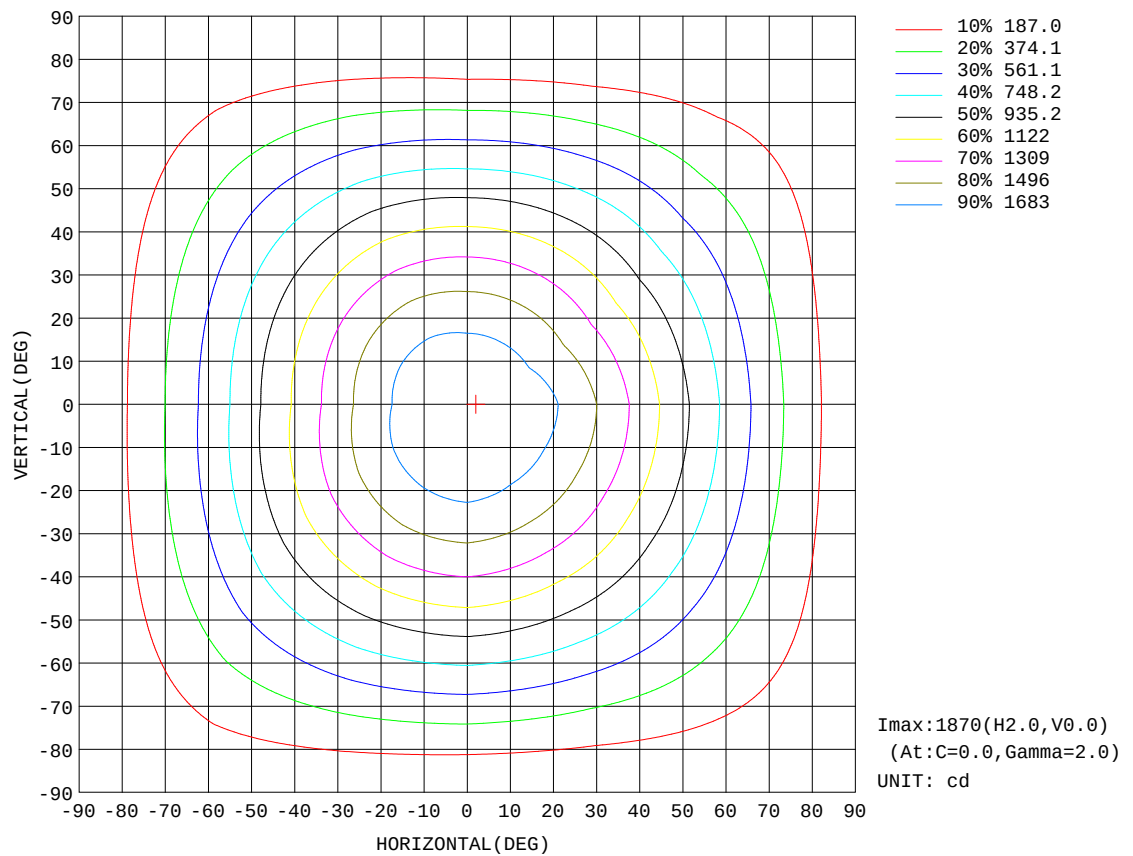


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators: ALLEN
 Test Date:2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
 Humidity:65.0%
 Test Distance:9.680m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

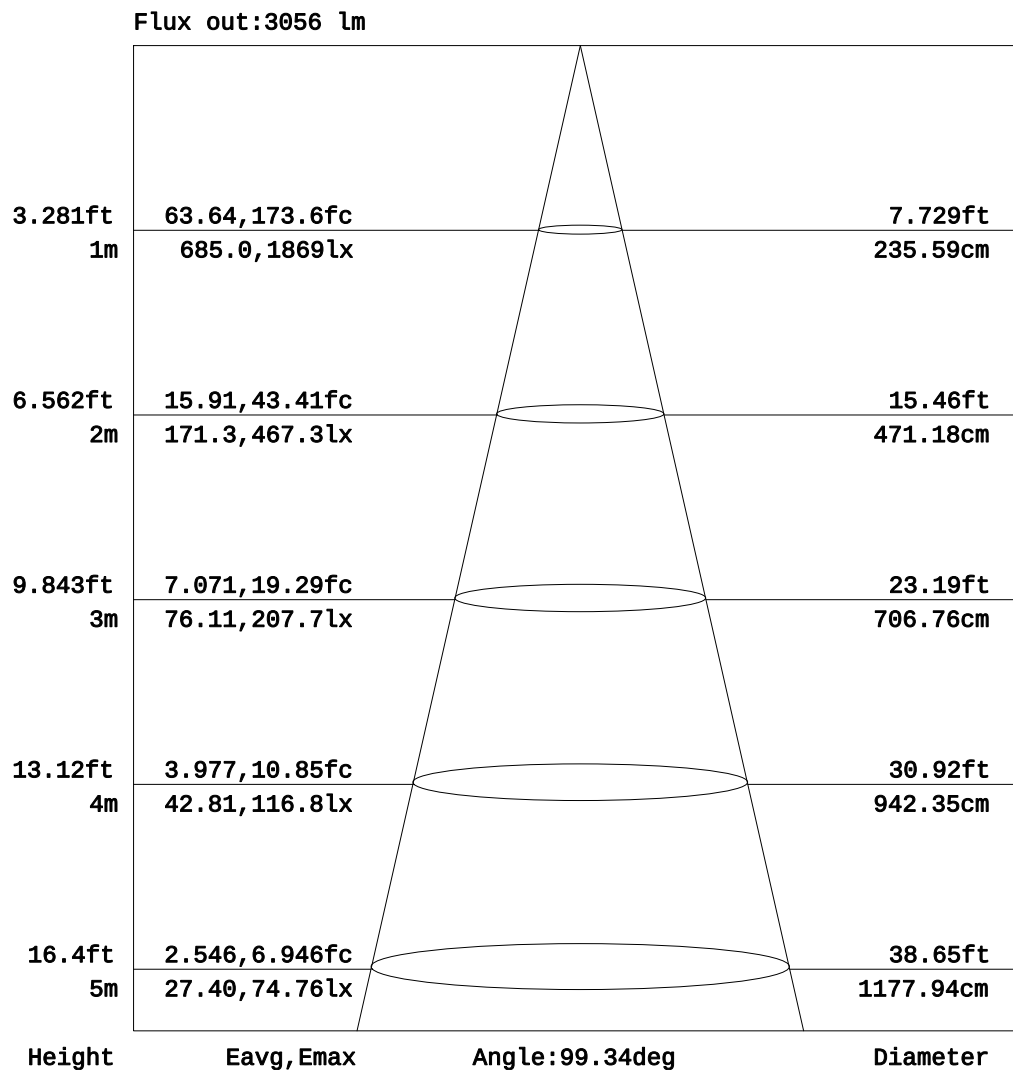


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: ALLEN
Test Date:2018-07-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

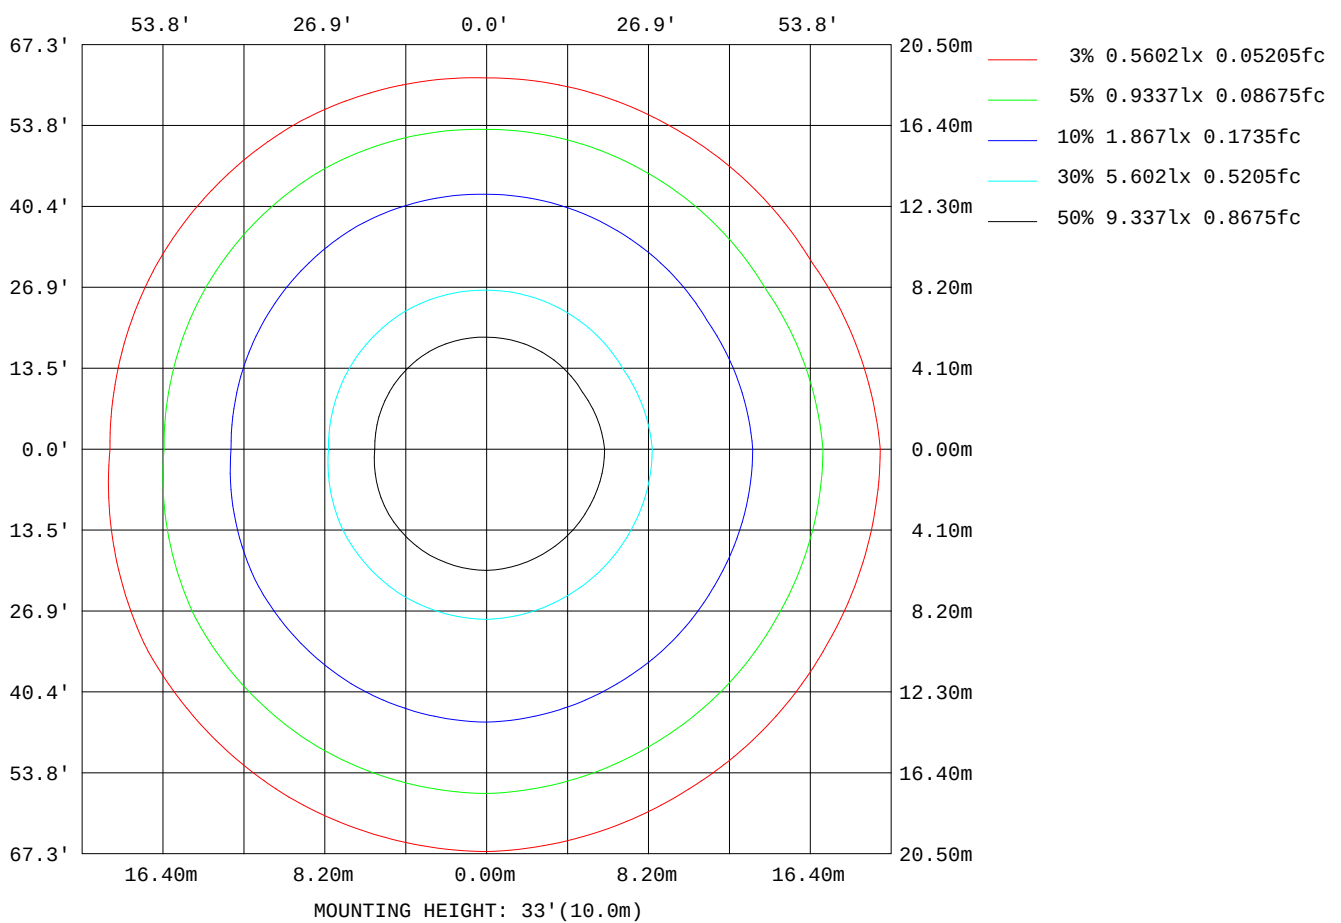

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: ALLEN
Test Date:2018-07-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks:

Planar Illuminance Curve

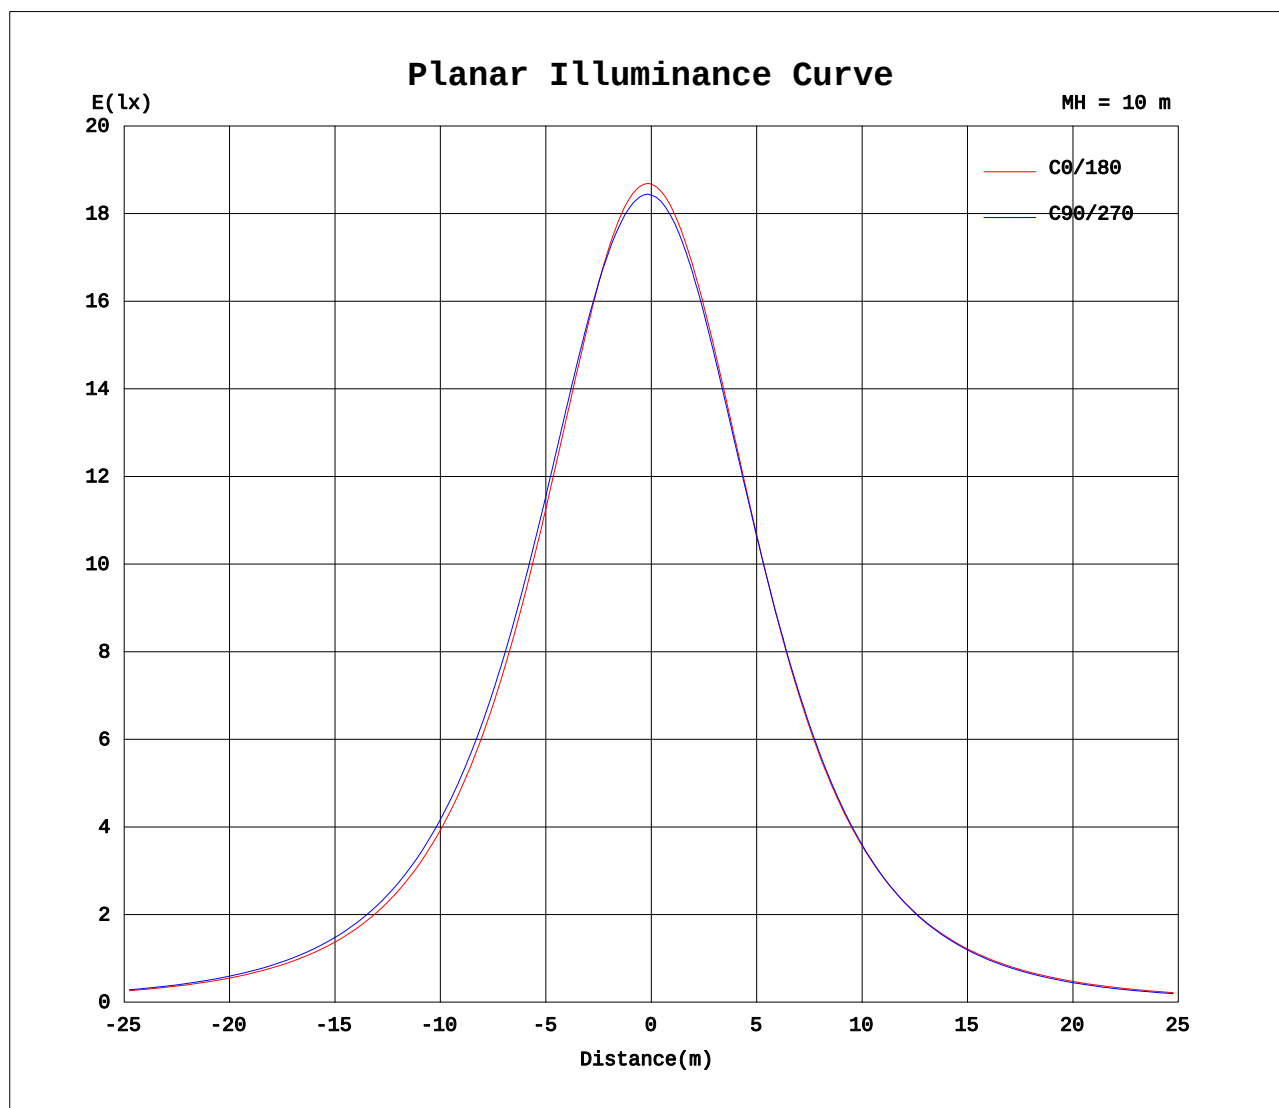

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ALLEN
Test Date: 2018-07-09

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity: 65.0%
Test Distance: 9.680m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.4075A P:48.57W PF:0.9922 Lamp Flux:4809.4x1 lm																	
NAME:									TYPE:						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:		
MFR.:									SUR.:						PROTECTION ANGLE:		

Table--1

UNIT: cd

γ (DEG)	C (DEG)																	
	0	30	60	90	120	150	180	210	240	270	300	330						
0	1867	1857	1850	1843	1843	1841	1867	1857	1850	1843	1843	1841						
5	1868	1855	1851	1844	1841	1835	1843	1836	1828	1820	1819	1819						
10	1839	1826	1824	1827	1817	1807	1794	1792	1786	1774	1773	1775						
15	1784	1770	1773	1789	1773	1755	1724	1728	1724	1707	1705	1709						
20	1705	1694	1701	1727	1709	1682	1635	1644	1642	1621	1619	1622						
25	1607	1600	1613	1644	1627	1591	1528	1539	1543	1521	1518	1519						
30	1497	1493	1510	1545	1528	1485	1406	1421	1427	1409	1406	1403						
35	1375	1374	1395	1432	1415	1366	1277	1292	1303	1287	1282	1277						
40	1246	1245	1269	1310	1290	1239	1144	1160	1173	1155	1150	1146						
45	1111	1108	1135	1181	1157	1107	1010	1026	1039	1017	1012	1012						
50	976	971	998	1044	1022	974	879	892	903	876	873	877						
55	841	836	861	904	885	842	748	759	765	736	735	744						
60	709	704	725	764	749	711	620	628	626	597	597	612						
65	581	574	589	625	614	583	495	501	492	459	463	485						
70	457	446	455	487	480	458	375	378	361	324	332	361						
75	338	325	324	352	350	339	261	263	234	195	205	245						
80	229	210	201	218	227	225	165	162	125	83.2	101	146						
85	137	119	96.9	103	118	131	90.4	82.2	46.4	11.8	32.2	71.3						
90	70.4	55.7	31.6	21.5	41.6	63.0	42.1	33.2	9.74	3.16	8.20	29.8						
95	33.1	23.8	9.66	3.57	10.0	25.7	10.8	11.4	5.12	4.34	5.86	12.6						
100	15.2	12.5	6.94	5.13	6.15	10.9	10.0	8.20	5.90	5.78	6.30	10.1						
105	12.6	10.4	7.31	6.89	7.10	9.43	9.29	8.19	6.98	7.03	7.05	9.57						
110	12.2	10.8	8.74	8.42	8.62	9.87	9.80	9.09	8.61	8.41	8.25	9.52						
115	12.7	10.8	10.1	10.1	10.4	10.8	10.3	9.91	10.5	9.90	9.67	9.61						
120	12.6	11.9	11.8	11.8	12.4	12.3	11.7	11.7	12.3	11.5	11.2	10.9						
125	13.7	13.5	13.5	13.5	14.3	14.2	13.4	13.5	14.1	13.1	12.7	12.3						
130	15.5	15.2	15.1	15.2	16.2	16.1	15.2	15.6	16.0	14.8	14.3	14.0						
135	17.2	16.8	16.7	16.8	17.9	18.1	17.2	17.5	17.9	16.6	17.0	15.8						
140	18.9	18.4	19.4	18.5	19.5	19.8	19.3	19.5	19.6	19.2	18.5	17.4						
145	20.5	20.0	20.0	20.2	21.3	21.4	20.6	21.4	22.1	20.8	19.3	19.0						
150	22.4	21.5	22.3	21.9	22.4	22.9	22.2	22.7	22.5	21.9	21.1	20.6						
155	23.7	23.3	23.6	23.3	23.5	24.0	23.7	25.7	23.7	23.3	22.5	22.4						
160	27.6	24.9	24.9	24.5	24.6	25.3	25.3	25.3	24.9	24.7	24.0	23.7						
165	26.7	26.3	25.9	25.5	25.6	25.8	26.4	26.2	26.0	25.7	26.8	25.3						
170	27.4	27.1	27.4	26.4	26.6	26.4	28.2	27.2	27.1	26.6	26.8	26.4						
175	28.7	30.0	27.0	27.0	28.8	27.0	30.4	30.0	29.8	27.1	26.9	27.3						
180	28.6	28.2	27.7	27.6	27.2	27.9	28.8	28.1	27.8	27.2	27.5	27.7						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators: ALLEN
Test Date:2018-07-09

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.266
Humidity:65.0%
Test Distance:9.680m [K=1.0000]
Remarks: