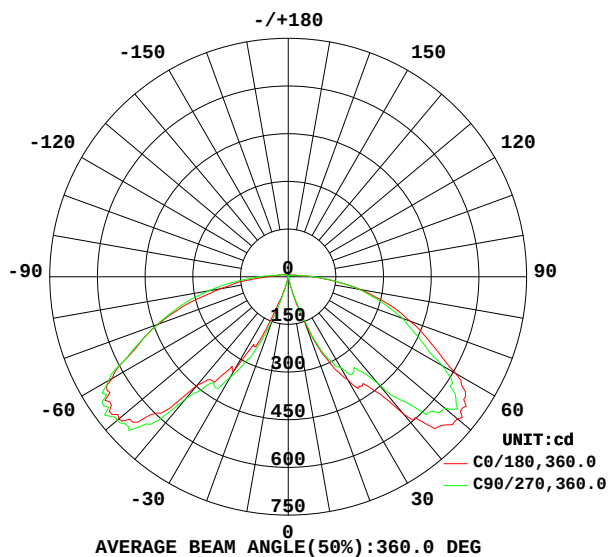
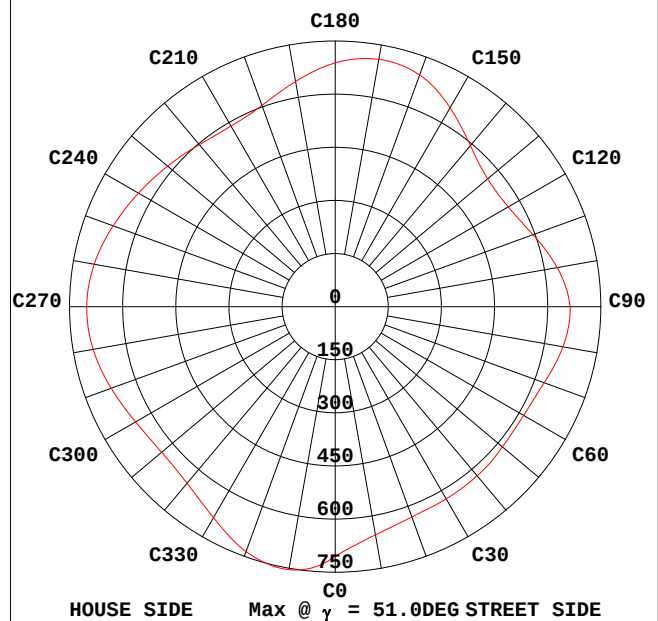


## STREETLIGHT PHOTOMETRIC TEST REPORT

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

| DATA OF LAMP     |         | PHOTOMETRIC DATA Eff: 117.09 lm/W |          |                  |         |
|------------------|---------|-----------------------------------|----------|------------------|---------|
| MODEL            |         | I <sub>max</sub> (cd)             | 725.7    | η street_up(%)   | 2.5     |
| NOMINAL POWER(W) |         | LOR(%)                            | 100.0    | η street_down(%) | 46.3    |
| RATED VOLTAGE(V) |         | TOTAL FLUX(lm)                    | 2553     | η house_up(%)    | 2.7     |
| NOMINAL FLUX(lm) | 2552.65 | MAXIMUM @(C,γ )                   | 338,51.0 | η house_down(%)  | 48.6    |
| LAMPS INSIDE     | 1       | η up(%)                           | 5.1      | 76 FLASHAREA(m2) | 0.05000 |
| TEST VOLTAGE(V)  |         | η down(%)                         | 94.9     | SLI              | 20.770  |

INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LY  
Test Date: 2020-0713

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity: 65.0%  
Test Distance: 9.660m [K=1.0000]  
Remarks:

Note: SLI: Specific Luminaire Index

## STREETLIGHT ISOCANDELA DIAGRAM

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

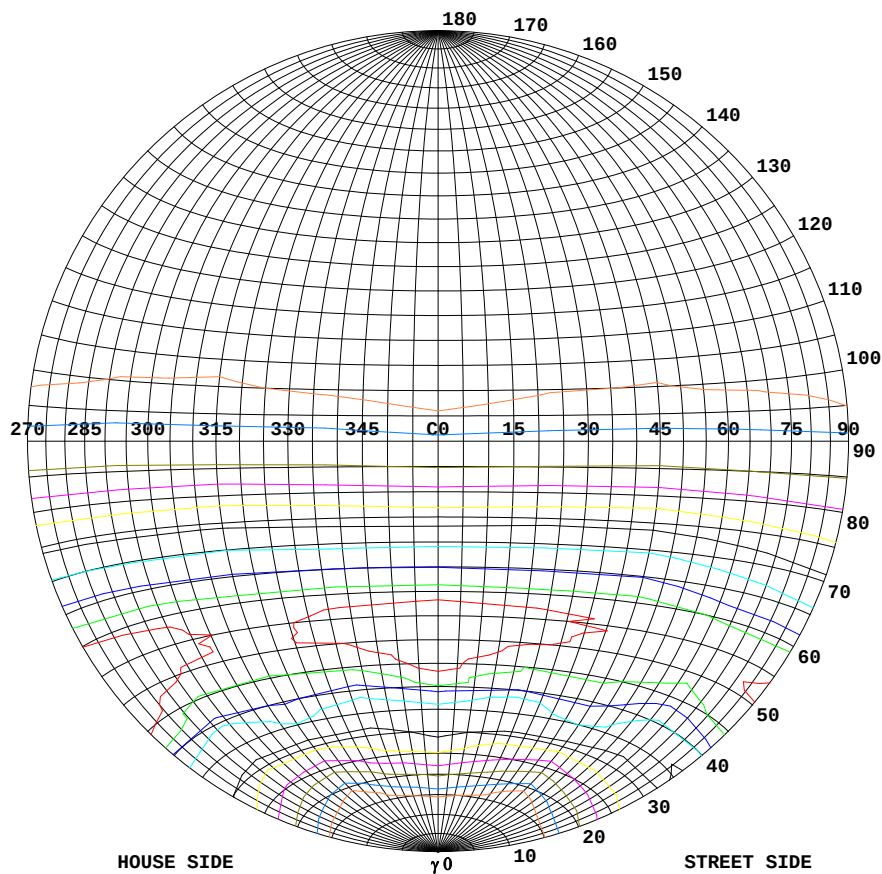



## Classification:

IES:Type V - Short  
CIE:Average - Short  
IES:None cut-off  
CIE:Non-cut-off  
Max.At80:106.2cd/klm  
Max.At90:39.31cd/klm  
Max.80-90:106.2cd/klm

| ISOCANDELA DIAGRAM |     |
|--------------------|-----|
| UNIT               | cd  |
| Imax=100%          | 726 |
| 90%                | 653 |
| 80%                | 581 |
| 70%                | 508 |
| 60%                | 435 |
| 50%                | 363 |
| 40%                | 290 |
| 30%                | 218 |
| 20%                | 145 |
| 10%                | 73  |
| 5%                 | 36  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LY  
Test Date:2020-0713

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:9.660m [K=1.0000]  
Remarks:

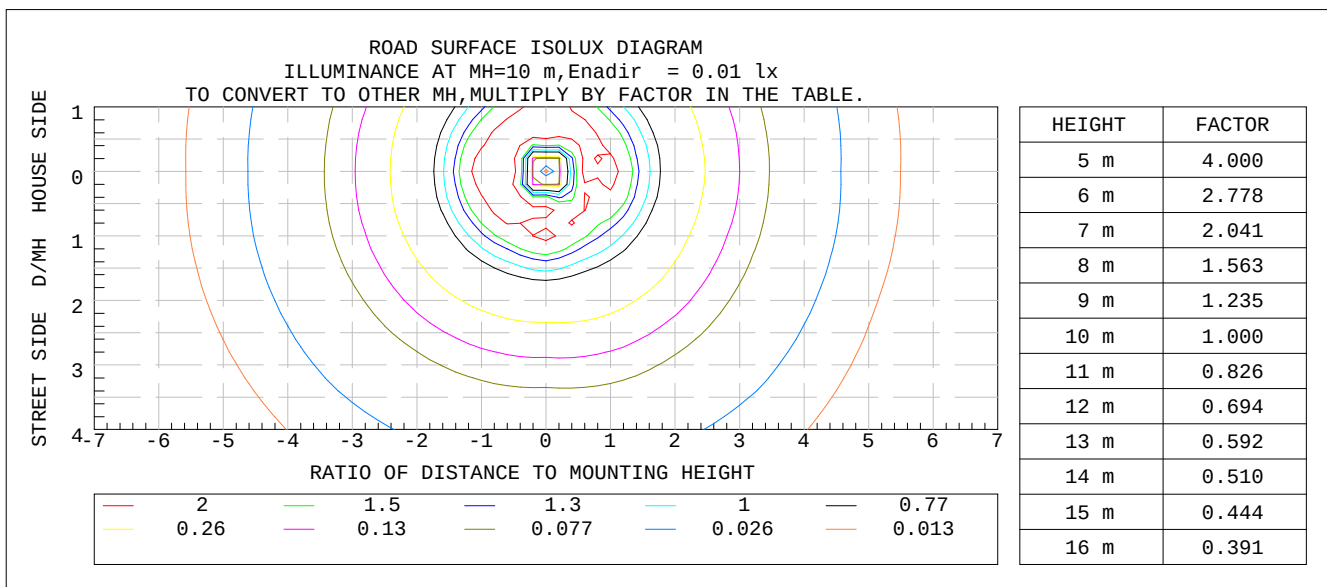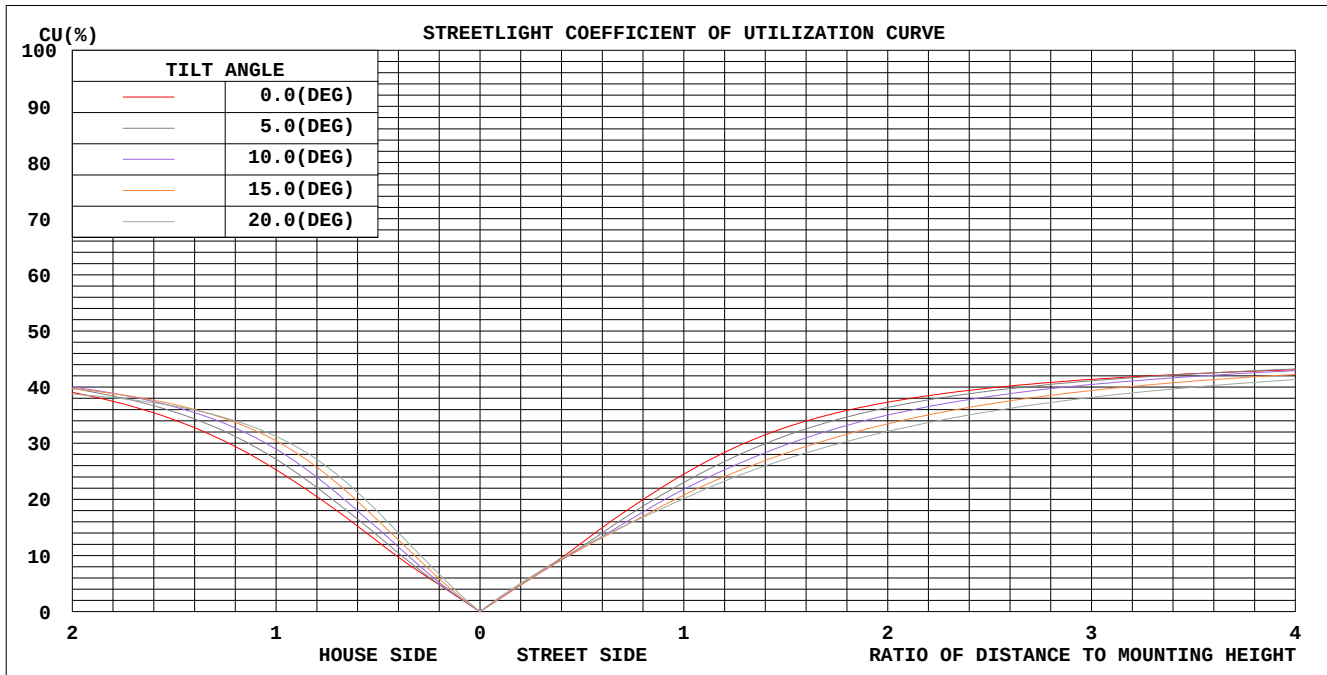COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LY  
Test Date: 2020-0713

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity: 65.0%  
Test Distance: 9.660m [K=1.0000]  
Remarks:

### ZONAL FLUX DIAGRAM

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |


| γ   | C0                    | C45    | C90    | C135   | C180   | C225   | C270   | C315   | γ       | Φ zone  | Φ total | %lum, lamp |
|-----|-----------------------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|------------|
| 10  | 4.591                 | 5.274  | 5.169  | 4.147  | 3.176  | 3.728  | 4.229  | 4.581  | 0- 10   | 0.2400  | 0.2400  | 0.01,0.01  |
| 20  | 153.3                 | 53.33  | 141.7  | 29.13  | 83.94  | 35.45  | 134.5  | 50.38  | 10- 20  | 9.921   | 10.16   | 0.40,0.40  |
| 30  | 372.8                 | 317.7  | 328.9  | 237.0  | 346.9  | 274.5  | 366.2  | 330.1  | 20- 30  | 100.1   | 110.2   | 4.32,4.32  |
| 40  | 563.0                 | 524.0  | 437.2  | 454.1  | 445.4  | 483.4  | 498.8  | 532.4  | 30- 40  | 247.7   | 357.9   | 14,14      |
| 50  | 694.9                 | 619.0  | 643.1  | 555.2  | 696.5  | 606.8  | 702.7  | 639.8  | 40- 50  | 446.4   | 804.3   | 31.5,31.5  |
| 60  | 607.8                 | 592.9  | 559.4  | 620.9  | 639.6  | 606.2  | 651.0  | 621.4  | 50- 60  | 579.4   | 1384    | 54.2,54.2  |
| 70  | 406.8                 | 417.6  | 382.6  | 451.8  | 433.2  | 443.0  | 439.2  | 442.9  | 60- 70  | 510.2   | 1894    | 74.2,74.2  |
| 80  | 229.1                 | 243.9  | 224.5  | 257.7  | 214.4  | 271.2  | 253.8  | 261.9  | 70- 80  | 355.8   | 2250    | 88.1,88.1  |
| 90  | 79.82                 | 85.75  | 82.23  | 96.52  | 64.23  | 99.30  | 93.20  | 91.86  | 80- 90  | 171.7   | 2421    | 94.9,94.9  |
| 100 | 28.38                 | 36.01  | 27.15  | 37.70  | 30.05  | 38.44  | 30.79  | 38.34  | 90-100  | 60.30   | 2482    | 97.2,97.2  |
| 110 | 17.41                 | 19.22  | 16.34  | 24.72  | 20.27  | 26.36  | 19.81  | 22.50  | 100-110 | 30.23   | 2512    | 98.4,98.4  |
| 120 | 10.70                 | 11.68  | 10.18  | 12.73  | 11.77  | 12.60  | 11.19  | 12.45  | 110-120 | 15.45   | 2527    | 99,99      |
| 130 | 9.720                 | 10.60  | 8.826  | 11.80  | 9.745  | 11.10  | 9.550  | 11.39  | 120-130 | 9.788   | 2537    | 99.4,99.4  |
| 140 | 8.085                 | 8.501  | 7.336  | 9.336  | 8.241  | 8.673  | 8.137  | 9.050  | 130-140 | 7.266   | 2544    | 99.7,99.7  |
| 150 | 6.698                 | 5.939  | 6.562  | 6.125  | 6.680  | 5.444  | 6.559  | 5.951  | 140-150 | 4.678   | 2549    | 99.9,99.9  |
| 160 | 4.139                 | 4.779  | 3.904  | 4.621  | 3.569  | 4.180  | 4.220  | 4.695  | 150-160 | 2.457   | 2551    | 100,100    |
| 170 | 2.235                 | 2.637  | 2.523  | 2.359  | 1.828  | 2.187  | 2.412  | 2.585  | 160-170 | 1.000   | 2552    | 100,100    |
| 180 | 0.5358                | 0.5506 | 0.5619 | 0.5736 | 0.5655 | 0.5506 | 0.5619 | 0.5581 | 170-180 | 0.1667  | 2553    | 100,100    |
| DEG | LUMINOUS INTENSITY:cd |        |        |        |        |        |        |        |         | UNIT:lm |         |            |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LY  
Test Date:2020-0713

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:9.660m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM


|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

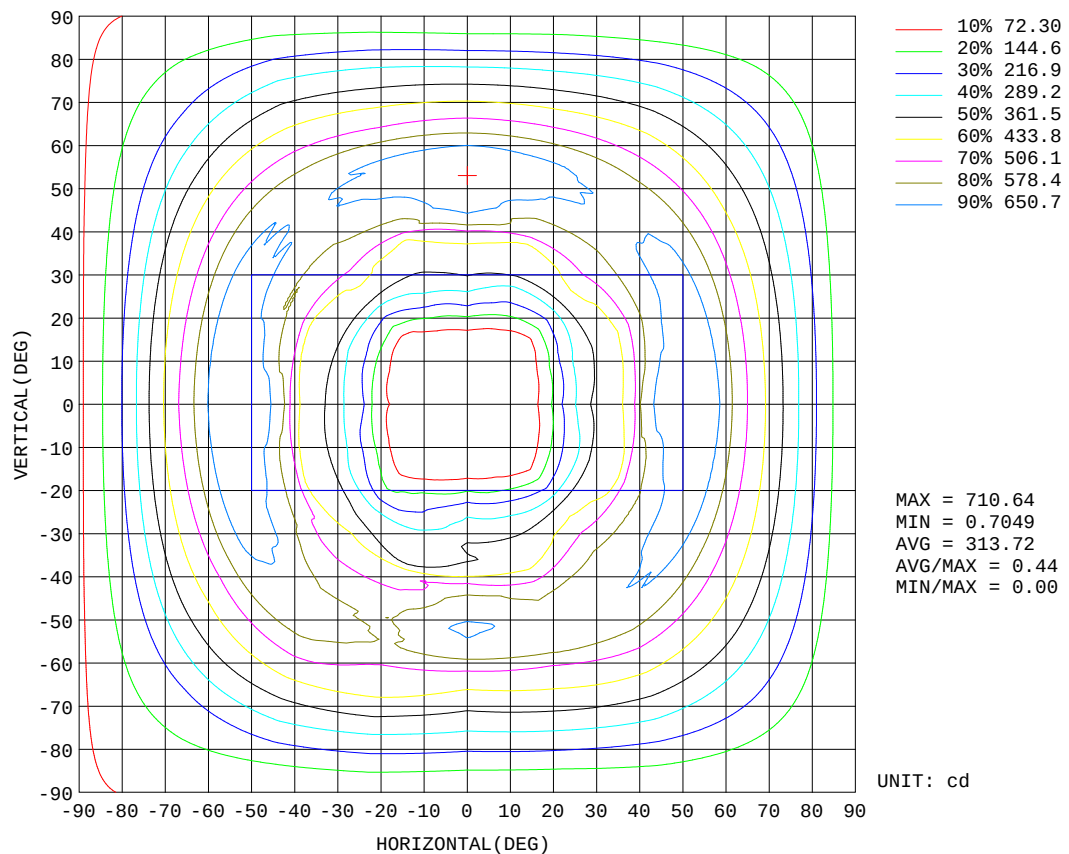

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LY  
Test Date: 2020-0713

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity: 65.0%  
Test Distance: 9.660m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

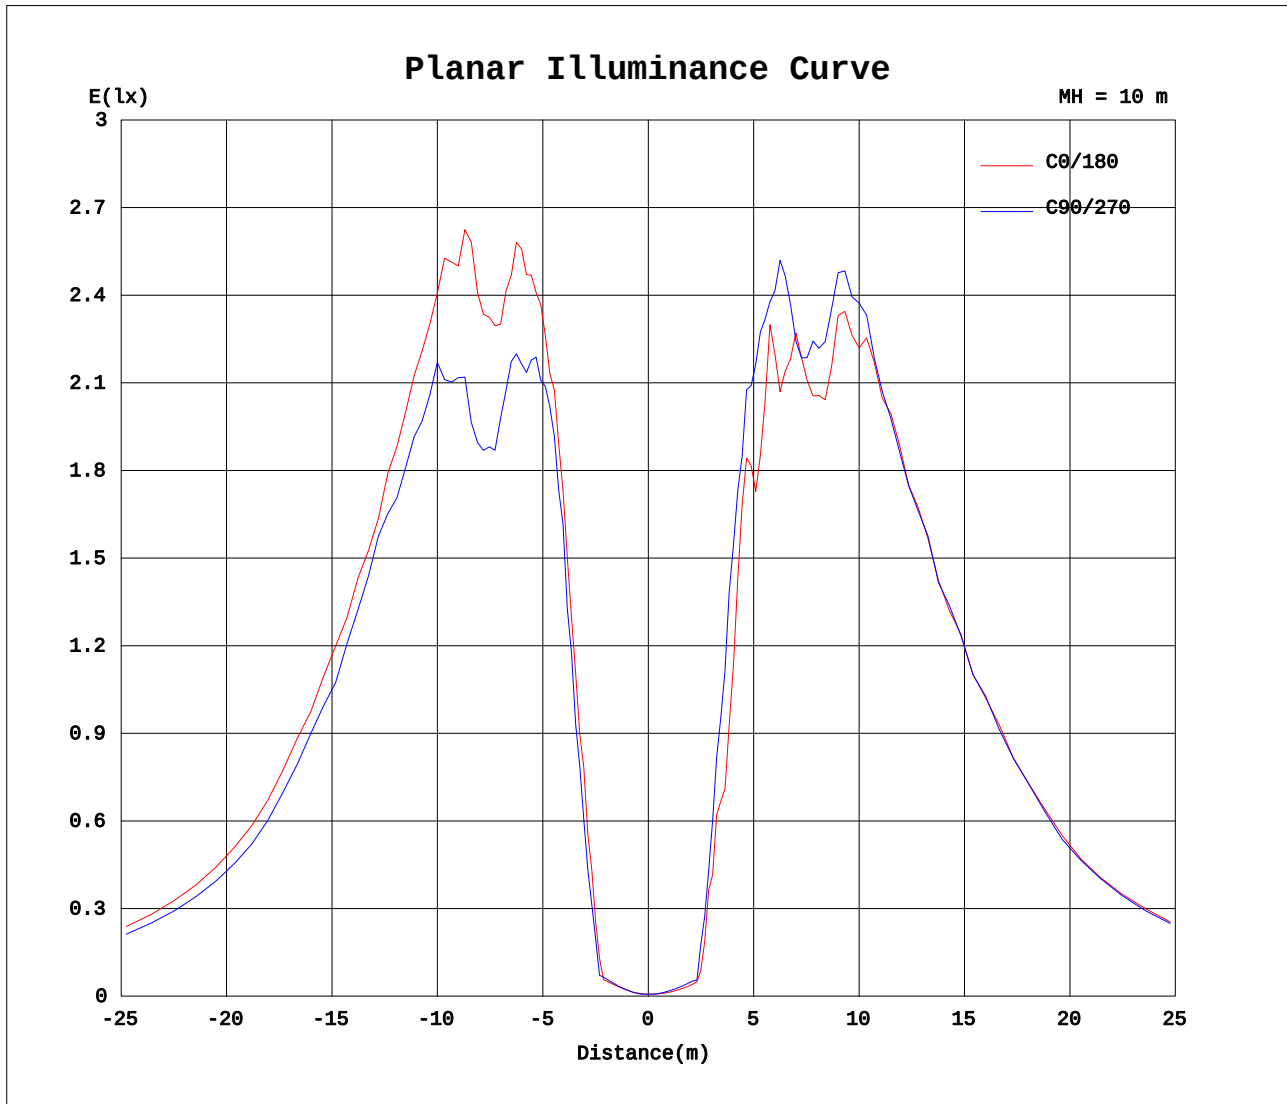


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: LY  
Test Date: 2020-0713

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity: 65.0%  
Test Distance: 9.660m [K=1.0000]  
Remarks:

## LCS REPORT

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

## LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

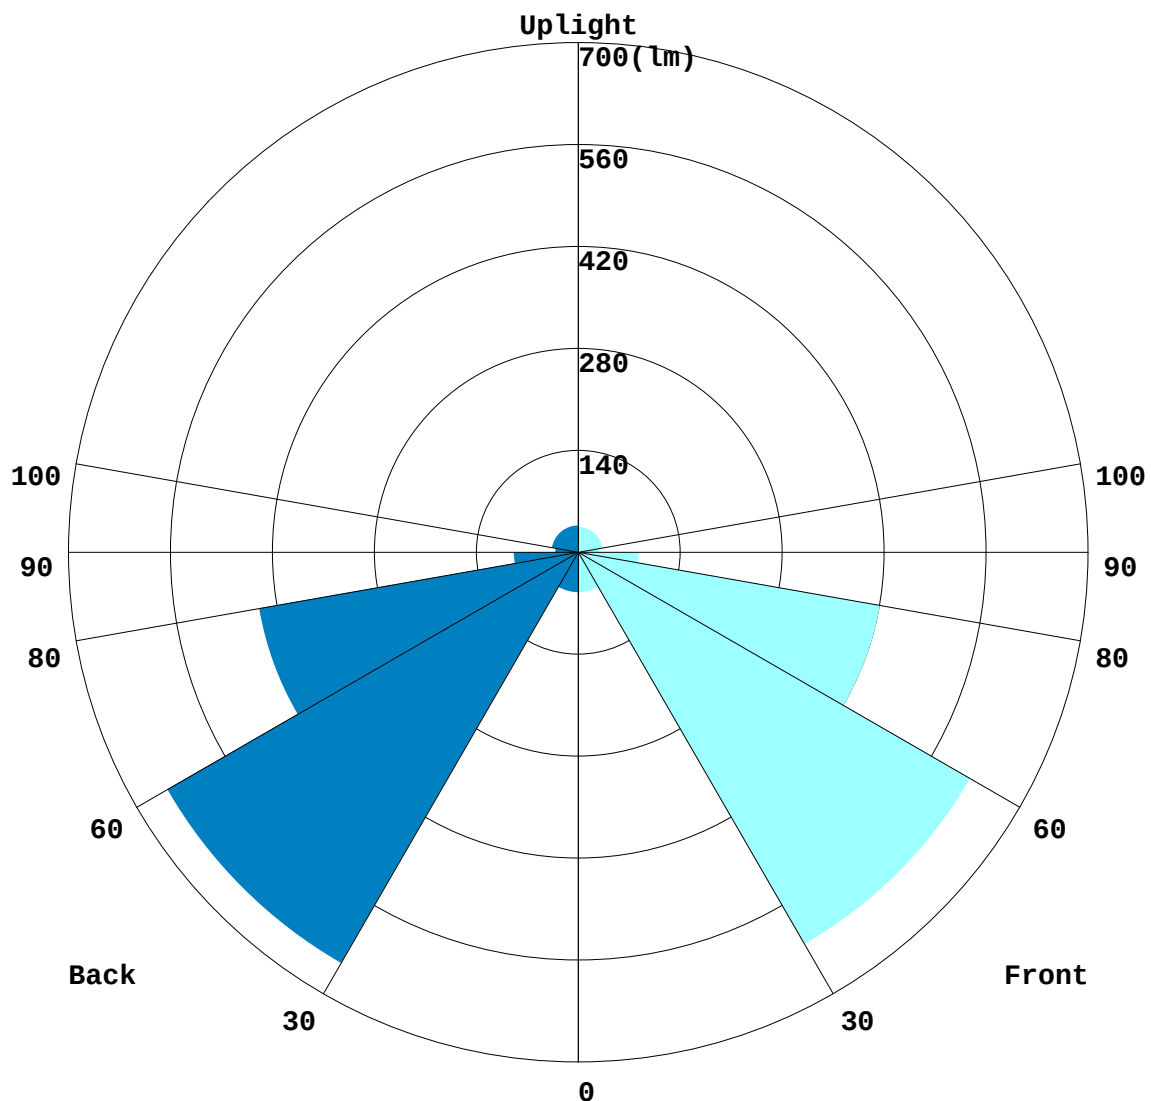

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: LY  
 Test Date: 2020-0713

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
 Humidity: 65.0%  
 Test Distance: 9.660m [K=1.0000]  
 Remarks:

## BUG REPORT

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

## IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 55.147 | 2.2         |
| FM - Front-Medium(30-60)     | 621.84 | 24.4        |
| FH - Front-High(60-80)       | 421.02 | 16.5        |
| FVH - Front-Very High(80-90) | 83.272 | 3.3         |
| Total Forward Light          | 1244.6 | 48.8        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 55.088 | 2.2  |
| BM - Back-Medium(30-60)     | 651.54 | 25.5 |
| BH - Back-High(60-80)       | 444.98 | 17.4 |
| BVH - Back-Very High(80-90) | 88.435 | 3.5  |
| Total Back Light            | 1308.1 | 51.2 |

|                            |        |     |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100)   | 60.301 | 2.4 |
| UH - Uplight-High(100-180) | 71.031 | 2.8 |
| Total Up Light             | 131.33 | 5.1 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B1-U3-G1 |
|---------------------------|----------|

| Zone        | Downward<br>Lumens | Upward<br>Lumens | Total<br>Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side  | 1240               | 68.018           | 1308.1          |
| Street Side | 1181.3             | 63.314           | 1244.6          |


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:LY  
 Test Date:2020-0713

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
 Humidity:65.0%  
 Test Distance:9.660m [K=1.0000]  
 Remarks:

### ROAD ISOCANDELA REPORT

|                                                                   |                |                  |
|-------------------------------------------------------------------|----------------|------------------|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |                |                  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         | TYPE:          | WEIGHT:          |
| SPEC.:                                                            | DIM.:          | SERIAL No.:      |
| MFR.:                                                             | SUR.:0.13*0.16 | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

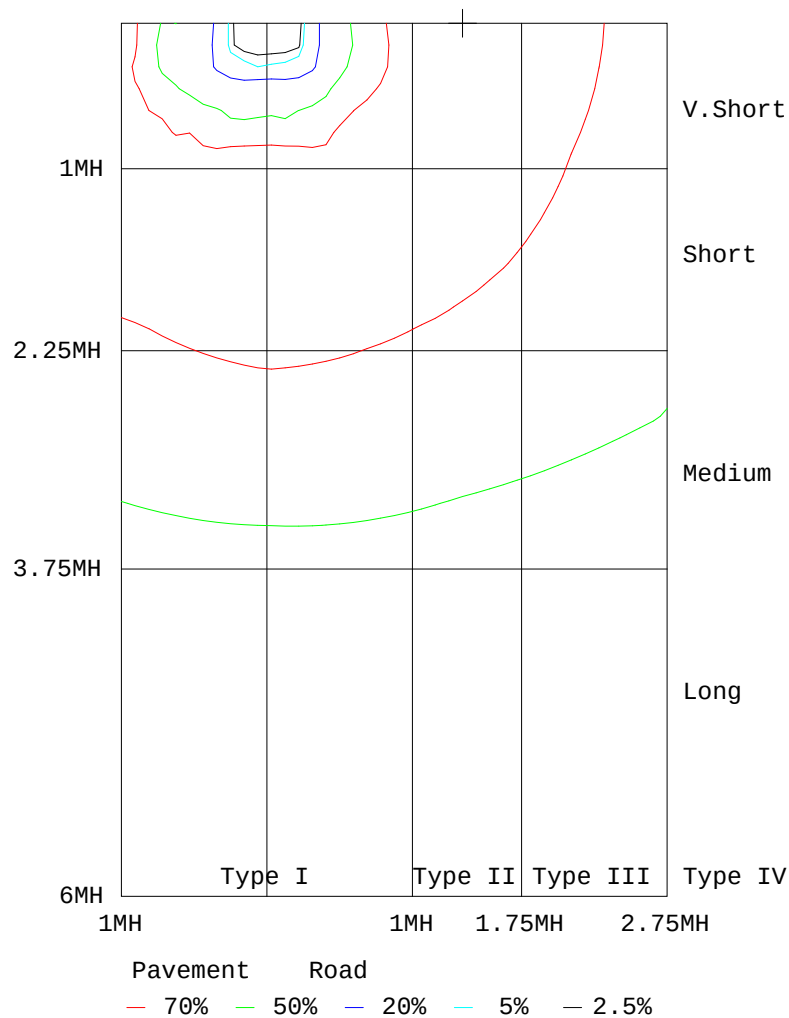

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LY  
Test Date:2020-0713

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:9.660m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                   |  |  |  |  |  |  |  |  |                |  |  |  |  |  |                  |  |  |
|-------------------------------------------------------------------|--|--|--|--|--|--|--|--|----------------|--|--|--|--|--|------------------|--|--|
| Test:U:120.3V I:0.1830A P:21.80W PF:0.9920 Lamp Flux:2552.65x1 lm |  |  |  |  |  |  |  |  |                |  |  |  |  |  |                  |  |  |
| NAME: 方形 12W-22W 3K 草坪灯样品                                         |  |  |  |  |  |  |  |  | TYPE:          |  |  |  |  |  | WEIGHT:          |  |  |
| SPEC.:                                                            |  |  |  |  |  |  |  |  | DIM.:          |  |  |  |  |  | SERIAL No.:      |  |  |
| MFR.:                                                             |  |  |  |  |  |  |  |  | SUR.:0.13*0.16 |  |  |  |  |  | Shielding Angle: |  |  |

Table--1

UNIT: cd

| C( DEG)<br>γ (DEG) | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|--------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                  | 0.74 | 0.74 | 0.74 | 0.74 | 0.74 | 0.74  | 0.74 | 0.74  | 0.74 | 0.74  | 0.74 | 0.74  | 0.74 | 0.74  | 0.74 | 0.74  |  |  |  |
| 5                  | 1.81 | 1.81 | 1.86 | 1.98 | 1.82 | 1.74  | 1.33 | 1.26  | 1.24 | 1.01  | 1.33 | 1.38  | 1.63 | 1.61  | 1.76 | 1.73  |  |  |  |
| 10                 | 4.59 | 4.73 | 5.27 | 5.40 | 5.17 | 4.76  | 4.15 | 3.58  | 3.18 | 3.13  | 3.73 | 3.96  | 4.23 | 4.43  | 4.58 | 4.70  |  |  |  |
| 15                 | 47.0 | 25.5 | 10.8 | 25.0 | 34.7 | 18.3  | 8.32 | 8.16  | 20.3 | 8.50  | 7.68 | 20.5  | 30.3 | 16.8  | 9.02 | 31.3  |  |  |  |
| 20                 | 153  | 108  | 53.3 | 112  | 142  | 101   | 29.1 | 79.5  | 83.9 | 74.9  | 35.4 | 112   | 135  | 96.1  | 50.4 | 128   |  |  |  |
| 25                 | 281  | 223  | 170  | 242  | 271  | 203   | 122  | 189   | 243  | 182   | 146  | 244   | 279  | 210   | 180  | 268   |  |  |  |
| 30                 | 373  | 324  | 318  | 318  | 329  | 277   | 237  | 306   | 347  | 270   | 275  | 325   | 366  | 318   | 330  | 359   |  |  |  |
| 35                 | 410  | 376  | 428  | 392  | 360  | 325   | 350  | 429   | 405  | 352   | 409  | 412   | 408  | 397   | 442  | 445   |  |  |  |
| 40                 | 563  | 476  | 524  | 422  | 437  | 412   | 454  | 441   | 445  | 399   | 483  | 427   | 499  | 469   | 532  | 490   |  |  |  |
| 45                 | 667  | 547  | 579  | 542  | 614  | 510   | 498  | 581   | 615  | 506   | 553  | 572   | 671  | 581   | 587  | 639   |  |  |  |
| 50                 | 695  | 621  | 619  | 600  | 643  | 583   | 555  | 681   | 697  | 595   | 607  | 647   | 703  | 666   | 640  | 697   |  |  |  |
| 55                 | 674  | 621  | 629  | 597  | 640  | 582   | 619  | 722   | 686  | 626   | 629  | 687   | 709  | 690   | 649  | 714   |  |  |  |
| 60                 | 608  | 574  | 593  | 574  | 559  | 563   | 621  | 666   | 640  | 607   | 606  | 631   | 651  | 647   | 621  | 663   |  |  |  |
| 65                 | 496  | 472  | 495  | 465  | 453  | 486   | 541  | 552   | 528  | 501   | 520  | 522   | 535  | 533   | 525  | 542   |  |  |  |
| 70                 | 407  | 395  | 418  | 401  | 383  | 434   | 452  | 454   | 433  | 418   | 443  | 438   | 439  | 440   | 443  | 444   |  |  |  |
| 75                 | 321  | 319  | 333  | 319  | 302  | 345   | 357  | 358   | 327  | 323   | 358  | 353   | 348  | 351   | 357  | 357   |  |  |  |
| 80                 | 229  | 228  | 244  | 235  | 225  | 253   | 258  | 238   | 214  | 219   | 271  | 268   | 254  | 254   | 262  | 262   |  |  |  |
| 85                 | 138  | 139  | 152  | 144  | 142  | 160   | 153  | 154   | 131  | 149   | 171  | 172   | 160  | 165   | 162  | 161   |  |  |  |
| 90                 | 79.8 | 82.7 | 85.8 | 84.3 | 82.2 | 92.0  | 96.5 | 88.9  | 64.2 | 76.2  | 99.3 | 100   | 93.2 | 97.7  | 91.9 | 94.7  |  |  |  |
| 95                 | 39.1 | 48.6 | 50.2 | 49.1 | 36.0 | 55.8  | 57.6 | 47.7  | 41.7 | 49.1  | 66.7 | 63.4  | 44.1 | 60.0  | 55.8 | 54.7  |  |  |  |
| 100                | 28.4 | 33.4 | 36.0 | 33.2 | 27.1 | 35.1  | 37.7 | 37.8  | 30.1 | 35.9  | 38.4 | 37.2  | 30.8 | 37.9  | 38.3 | 36.9  |  |  |  |
| 105                | 23.0 | 26.9 | 30.1 | 27.3 | 21.2 | 29.5  | 34.0 | 31.8  | 24.2 | 30.5  | 34.8 | 31.1  | 24.8 | 31.2  | 33.6 | 30.9  |  |  |  |
| 110                | 17.4 | 18.5 | 19.2 | 19.2 | 16.3 | 20.9  | 24.7 | 24.6  | 20.3 | 22.9  | 26.4 | 23.7  | 19.8 | 22.6  | 22.5 | 21.2  |  |  |  |
| 115                | 12.9 | 13.3 | 13.3 | 14.1 | 12.3 | 14.2  | 15.8 | 18.0  | 15.4 | 16.1  | 16.5 | 16.8  | 14.9 | 16.0  | 14.6 | 15.4  |  |  |  |
| 120                | 10.7 | 11.3 | 11.7 | 11.3 | 10.2 | 11.3  | 12.7 | 13.5  | 11.8 | 12.4  | 12.6 | 12.5  | 11.2 | 12.2  | 12.4 | 12.5  |  |  |  |
| 125                | 10.1 | 10.4 | 11.2 | 10.2 | 9.57 | 9.92  | 12.2 | 11.8  | 10.4 | 10.8  | 11.6 | 10.9  | 10.1 | 10.8  | 11.8 | 11.4  |  |  |  |
| 130                | 9.72 | 9.94 | 10.6 | 9.47 | 8.83 | 8.94  | 11.8 | 11.0  | 9.75 | 9.99  | 11.1 | 10.0  | 9.55 | 10.2  | 11.4 | 10.8  |  |  |  |
| 135                | 9.08 | 9.21 | 9.72 | 8.62 | 7.97 | 8.06  | 10.8 | 10.25 | 9.05 | 9.27  | 10.1 | 9.41  | 8.87 | 9.47  | 10.5 | 10.22 |  |  |  |
| 140                | 8.09 | 8.17 | 8.50 | 7.88 | 7.34 | 7.64  | 9.34 | 9.04  | 8.24 | 8.14  | 8.67 | 8.55  | 8.14 | 8.31  | 9.05 | 9.09  |  |  |  |
| 145                | 7.14 | 7.40 | 7.28 | 7.29 | 6.94 | 7.44  | 7.65 | 8.00  | 7.23 | 7.23  | 7.18 | 7.56  | 7.05 | 7.38  | 7.61 | 8.28  |  |  |  |
| 150                | 6.70 | 6.26 | 5.94 | 6.25 | 6.56 | 6.43  | 6.13 | 6.98  | 6.68 | 6.28  | 5.44 | 6.70  | 6.56 | 6.47  | 5.95 | 7.30  |  |  |  |
| 155                | 5.08 | 5.04 | 5.21 | 5.11 | 4.88 | 5.24  | 5.15 | 5.53  | 4.83 | 4.81  | 4.60 | 5.45  | 5.37 | 5.24  | 5.11 | 5.76  |  |  |  |
| 160                | 4.14 | 4.29 | 4.78 | 4.49 | 3.90 | 4.01  | 4.62 | 4.45  | 3.57 | 3.66  | 4.18 | 4.27  | 4.22 | 4.54  | 4.70 | 4.81  |  |  |  |
| 165                | 3.14 | 3.48 | 4.08 | 3.76 | 3.19 | 3.41  | 3.57 | 3.28  | 2.81 | 2.95  | 3.41 | 3.42  | 3.25 | 3.72  | 4.01 | 3.87  |  |  |  |
| 170                | 2.24 | 2.49 | 2.64 | 2.67 | 2.52 | 2.69  | 2.36 | 2.05  | 1.83 | 1.96  | 2.19 | 2.64  | 2.41 | 2.73  | 2.59 | 2.80  |  |  |  |
| 175                | 1.24 | 1.43 | 1.51 | 1.35 | 1.49 | 1.70  | 1.52 | 1.41  | 1.24 | 1.46  | 1.41 | 1.66  | 1.25 | 1.46  | 1.39 | 1.49  |  |  |  |
| 180                | 0.54 | 0.52 | 0.55 | 0.49 | 0.56 | 0.57  | 0.57 | 0.53  | 0.57 | 0.54  | 0.55 | 0.56  | 0.56 | 0.57  | 0.56 | 0.49  |  |  |  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:LY  
Test Date:2020-0713

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE G0-2000B\_V1 SYSTEM V2.0.351  
Humidity:65.0%  
Test Distance:9.660m [K=1.0000]  
Remarks: