Hubbell Floor Boxes

Featuring Hubbell SystemOne Floor Boxes

HUBBELL











Nobody delivers like Hubbell Commercial Solutions

HUBBELL®
Wiring Systems

Hubbell Floor Boxes

Featuring the unique capabilities of Hubbell's SystemOne universal cover and sub-plate design, Hubbell has expanded its floor box offering to provide industry leading flexibility while accommodating an extensive range of applications. Hubbell SystemOne is constructed to give customers the ability to create personal solutions for their most demanding, power, data and audio/video requirements. In addition, Hubbell continues to offer a complete variety of traditional flush and recessed floor box options.

Whatever your requirement, Hubbell has a solution. Combined with Hubbell SystemOne fire-rated poke-through products that offer the same unique advantages, Hubbell's entire delivery system package is second to none in providing a consistent aesthetic and functional solution for your power, data and audio/video needs.



Hubbell SystemOne Floor Box applications…



Multi-Service Applications
This Hubbell SystemOne sub-plate incorporates 2 standard Style Line® rectangular openings. These can be used for a variety of power and/or data applications. It will accommodate 15 or 20 amp, standard, isolated ground, GFCI or surge protected receptacles. Using communication frames it can provide up to a 6-port multi-service or a 12-port all communication solution.

Multimedia Applications
Other Hubbell SystemOne sub-plates are designed to meet the growing needs of the audio and video markets. Some sub-plates provide power outlets with Hubbell's audio/video products including 15-Pin SVGA, RCA, S-Video, 3.5mm stereo, and XLR microphone jacks. Another sub-plate can accommodate Extron® Electronics's MAAP and AAP series audio/video modules.

4X4 Applications
Provides maximum power capacity for flush, multi-service applications. This sub-plate features a pre-wired four outlet 20A, 125V receptacle and four openings for snap-in flush mount Hubbell modular jacks and audio/video snap-in connectors.

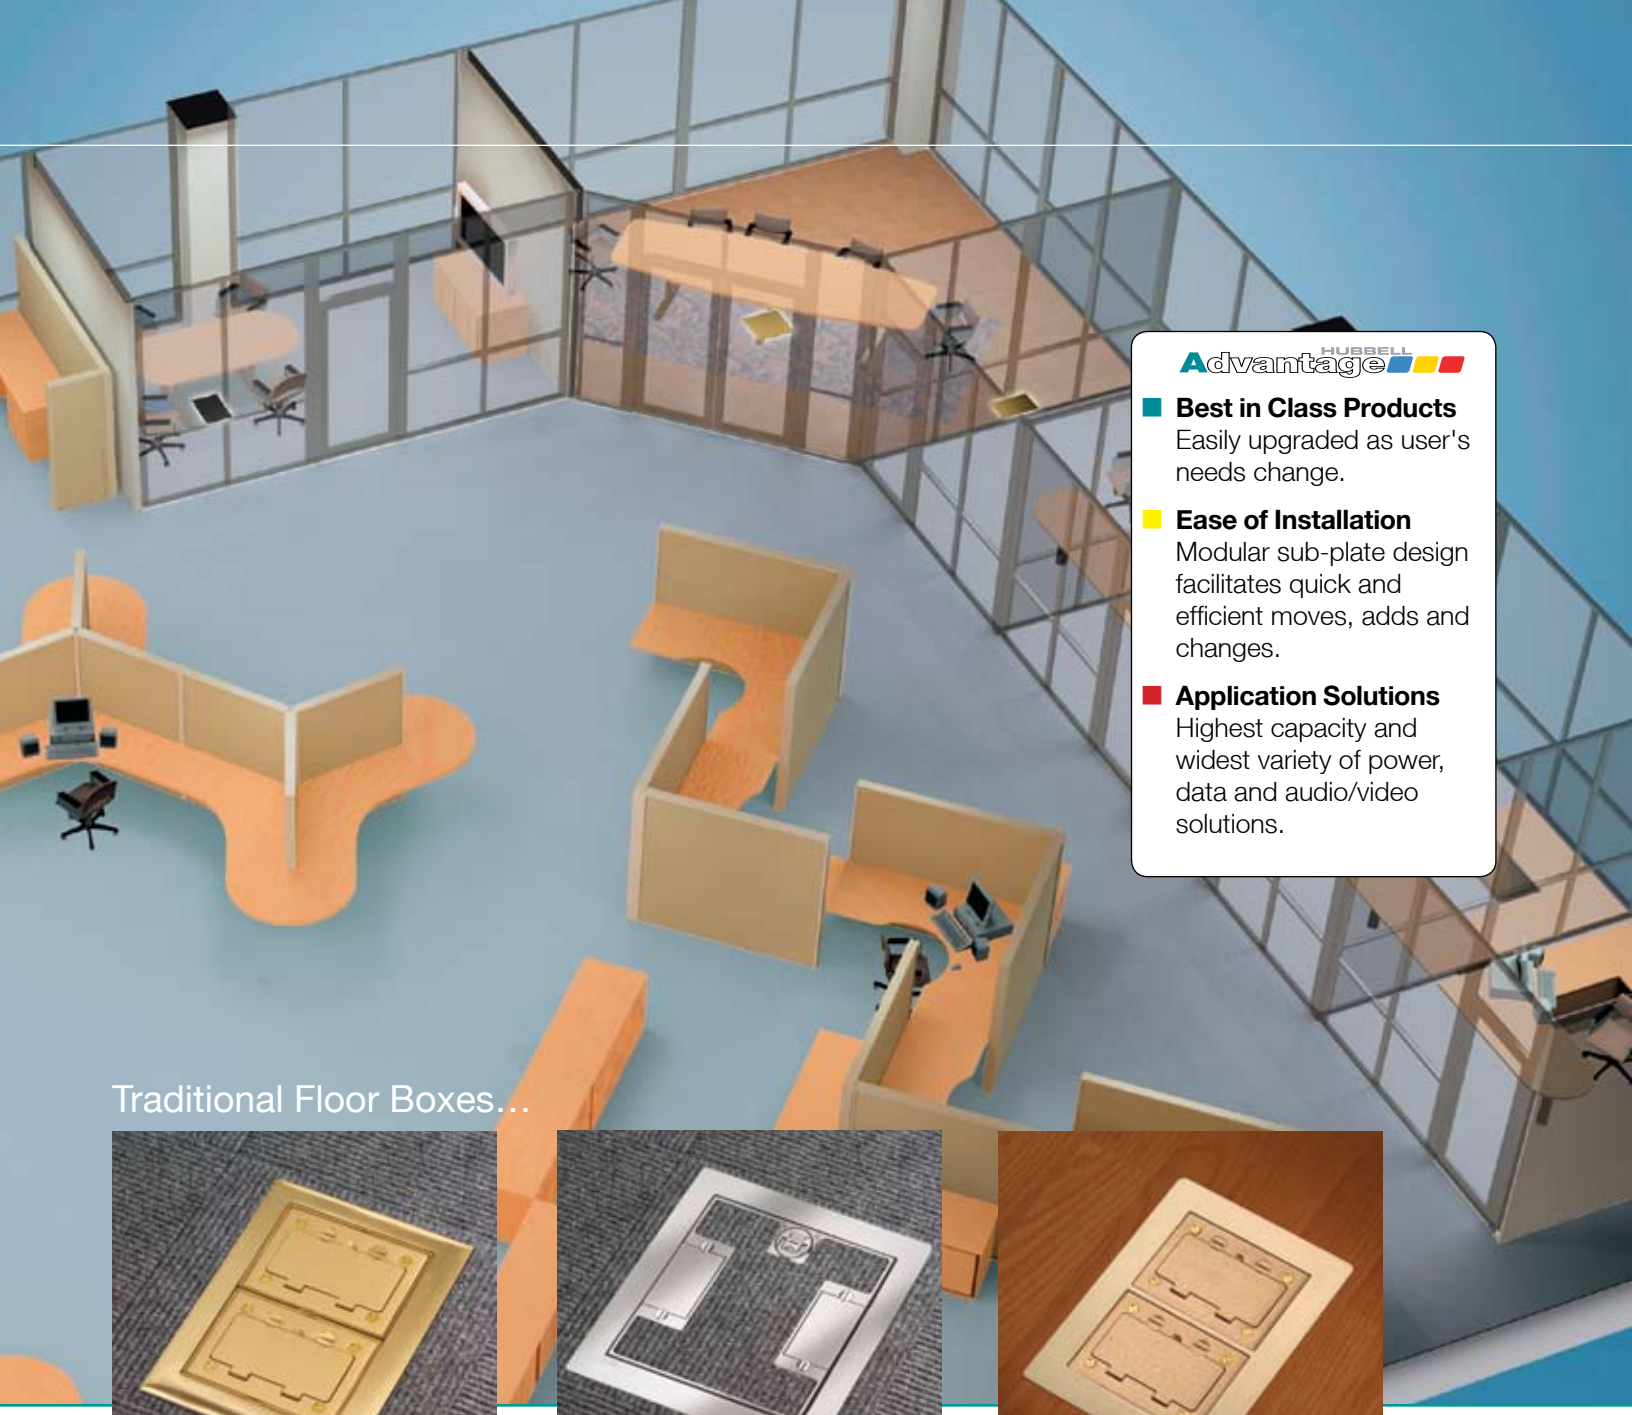

Hubbell Advantage

- **Best in Class Products**
  Easily upgraded as user's needs change.
- **Ease of Installation**
  Modular sub-plate design facilitates quick and efficient moves, adds and changes.
- **Application Solutions**
  Highest capacity and widest variety of power, data and audio/video solutions.

Traditional Floor Boxes…

Flush Applications

Hubbell offers a wide variety of traditional solutions including single and multi-gang cast iron, stamped steel and non-metallic floor boxes in both round and rectangular designs. These boxes can be finished with either brushed brass or aluminum covers and flanges to match any office décor. All Hubbell floor box assemblies exceed UL 514A scrub water exclusion requirements.

Recessed Applications

For applications where recessed connections are desired, Hubbell has a complete line of recessed stamped steel and cast iron floor boxes, from two to eight gangs. A variety of modular face plates are available to meet a wide array of power, data, voice and audio/video requirements. Carpet and tile cover/flange assemblies are offered in painted brass, aluminum, black, gray, brown and ivory colors.

Wooden Floor Applications

Hubbell offers round, single service and rectangular, multi-service floor boxes for wooden floor applications. The rectangular boxes are available in one, two and three-gang options and feature removable barriers for maximum capacity while maintaining separation of power and low voltage. A variety of covers and flanges are available in brushed aluminum or brass to meet aesthetic requirements.

Hubbell SystemOne Non-Metallic Floor Box



Saves time and money on installation with a simple saw cut after pour adjustment.

Oversized 1 ½" data conduit hub provides for increased cable capacity and helps maintain proper bend radius suitable for Category 6/6a, 5e, coax and fiber cables.

Parallel conduit hubs reduce labor and material costs and facilitate easier wire pulling in dual-service applications.

- Provides an economical, easy to install in-floor delivery system for large, open plan spaces.
- Accepts all Hubbell SystemOne universal covers and sub-plates for both single and dual service applications.
- Convenient cubic inch capacity markings on inside allow for easy inspection.
- Corresponding graduated cubic inch markings on dividers.
- High-strength rigid PVC construction that is non-corrosive.
- Supplied with concrete cap, conduit reducers, and conduit hub plugs.

Hubbell SystemOne Universal Cover



Hinged doors open 180 degrees flush to the carpet flange or tile.

Screws allow each door to be secured independently.

Universal carpet or tile flange can be used for Hubbell SystemOne Fire-Rated Poke-Through or PVC Floor Box.

- Cast aluminum construction available in durable black, gray, brass, aluminum and ivory powder coat finishes.
- Features ScrubShield™ technology that exceeds UL514A and UL514C scrub water exclusion requirements.
- Provides consistent look and maximum functionality throughout the installed life.

Hubbell SystemOne Sub-Plates

While no one can predict the future, Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne Floor Boxes to accommodate future moves, adds and changes.



- Hubbell 4X4: four 20A, 125V receptacles, four openings for voice/data jacks and multimedia connectors.
- Hubbell INFINeSTATION™ front loading modular connectivity.
- Accommodates Extron® Electronic's Architectural Series audio/video system integration products.
- Ortronics®, Siemon™, Panduit®, SYSTIMAX® and keystone options enable maximum data flexibility.
- Large capacity and multi-service furniture feed applications.
- Accomodates GFCI, surge and standard Style Line® receptacles.
- Twist-Lock® receptacle with or without jack openings.

Hubbell SystemOne Non-Metallic Floor Box

S1PFB **Round Multi-Service PVC Floor Box**

Features (2) 1 ½" hubs for low voltage and (2) 1" hubs for power. Includes concrete cover and a variety of reducers and closure plugs that allow a full range of conduit sizes.



S1DIV1 **Side by Side Divider**

Required for use with catalog number S1SP (Style Line®/GFCI) sub-plate when used in multi-service applications. All other sub-plates include the appropriate dividers.



Min. Depth of Pour	Ranges from 3" to 5" depending on application. See sub-plates below for details.
Capacity	100 cubic inches prior to cutting level to floor (19.5 cubic inches per inch of depth).
Diameter (External)	5.75"
Diameter (Internal)	5.00"
Height	6.00"
Hubs	(2) 1 ½" and (2) 1" conduit hubs
Conduit Selection	Accepts ¾", 1", 1 ¼", 1 ½" schedule 40 and schedule 80 rigid PVC conduit and E.N.T. (electrical non-metallic tubing).

Hubbell SystemOne Universal Covers

Universal, Cast Aluminum Carpet Flange & Cover Assembly

Catalog Number	
S1CFCBRS	Brass
S1CFCAL	Aluminum
S1CFCBL	Black
S1CFCGY	Gray
S1CFCI	Ivory



- Cast aluminum construction
- Powder coat finish

Universal, Cast Aluminum Tile Flange & Cover Assembly

Catalog Number	
S1TFCBRS	Brass
S1TFCAL	Aluminum
S1TFCBL	Black
S1TFCGY	Gray
S1TFCI	Ivory



- Cast aluminum construction
- Powder coat finish

Sub-Plates

Catalog Number

S1SP **Style Line/GFCI**

(2) Style Line openings for power and/or datacom applications.



3

Catalog Number

S1SP4X4 **Hubbell 4 X 4**

(4) 20A, 125V receptacles. (4) Keystone openings for Hubbell jacks or flush A/V connectors.



4

Catalog Number

S1SPTL **Twist-Lock® + Data**

20 or 30 Amp TL rec. (1.56" OD). (2) Keystone openings for Hubbell jacks or flush A/V connectors.



4

S1SP4IM **Hubbell Datacom**

1 unit flush INFINeSTATION™ opening. 3 unit recessed INFINeSTATION opening for data, voice, and A/V applications. (See back cover for details)



3.5

S1SP3IM **Hubbell A/V + Power**

(1) 20A, 125V receptacle. 3 unit recessed INFINeSTATION opening for data, voice, and A/V applications. (See back cover for details)



5

S1SPFFBRS Brass **Furniture**
S1SPFFAL Alum. **Feed Cover/**
S1SPFFBL Black **Flange**
S1SPFFGY Gray

(1) ¾" & (1) 1 ½" KOs for power and/or datacom applications. **Universal Cover not required. Includes carpet flange.**



3

S1SPEXT1 **Extron® MAAP + Power**

(1) 20A, 125V receptacle. Recessed opening for (3) single Extron MAAP Series adapter plates.



4

S1SPEXT2 **Extron AAP + Power**

(1) 20A, 125V receptacle. Recessed opening for (1) single Extron MAAP and (2) single AAP Series adapter plates.



4

S1SPEXT3 **Extron Datacom**

Recessed opening for (2) single Extron MAAP and (2) single AAP Series adapter plates.



4.5

S1SPORT **Ortronics Series II® + Power**

(1) 20A, 125V receptacle. Recessed opening for (3) 1 unit Ortronics Series II modules.



5

S1SPTRAC **Ortronics TracJack® + Power**

(1) 20A, 125V receptacle. Recessed bezel for (6) Ortronics TracJack modules.



3.5

S1SPMAX **Siemon MAX® + Power**

(1) 20A, 125V receptacle. Recessed bezel for (6) Siemon MAX modules.



5

S1SP4X4PA **Panduit Mini-Com® 4 X 4**

(4) 20A, 125V receptacles (4) Openings for Panduit Mini-Com Connectivity.



4

S1SP4X4SYS **SYSTIMAX® 4 X 4**

(4) 20A, 125V receptacles. (4) Openings for SYSTIMAX Connectivity.



4

Signifies minimum depth of concrete pour in inches for Hubbell SystemOne S1PFB Floor Box.

Flush Round Single or Multi-Service Non-Metallic Floor Box

Catalog Number

PFB1 **Round Single or Low Capacity Multi-Service PVC Floor Box**

Features (2) 1" and (2) ¾" conduit hubs. Includes concrete cover and four dual purpose reducer/closure plugs. (2) 1" plugs close off 1" hub or reduce 1" to ¾". (2) ¾" plugs close off ¾" hub or reduce ¾" to ½".



PFBA1A **Adapter**

Required for all applications.



PFBT1A **Low Voltage Divider**

Required for use with catalog number PFB1 when used in multi-service applications. Accepts Hubbell standard duplex receptacles or 15A Twist-Lock duplex receptacles (HBL4700 series).



Min. Depth of Pour	3.00"
Capacity	100 cubic inches prior to cutting level to floor (19.5 cubic inches per inch of depth).
Diameter (External)	5.75"
Diameter (Internal)	5.00"
Height	6.00"
Hubs	(2) 1" and (2) ¾" conduit hubs
Conduit Selection	Accepts ½", ¾", 1" schedule 40 and schedule 80 rigid PVC conduit and E.N.T. (electrical non-metallic tubing). Use catalog number PFBYA1 ¾" "Y" adapter to feed parallel runs of ¾" conduit.



PFBYA1 **"Y" Adapter**

¾" "Y" adapter to feed parallel runs of ¾" conduit.

Flush Round Floor Box Covers and Flanges

Multi-Service Cover and Flange Assemblies

Includes floor box cover with duplex flaps, (2) ½" dia. low voltage feed through holes and matching carpet flange.

SF39253A	PFBCBRA	PFBCIA	PFBCGYA	PFBCBKA
				
Brass	Brown Plastic	Ivory Plastic	Gray Plastic	Black Plastic

Single Service Covers

Brass	S3925	S3725	S2525	S2725	S2925	S3525	S3325
Aluminum	SA3925	SA3725	SA2525	SA2725	SA2925	SA3525	—
							
	Duplex Flap	Duplex Screw	2 1⁄8" x ¾" Combination	2 1⁄8" x 1" Combination	2 1⁄8" Single Receptacle	2 3⁄8" Single Receptacle	2 1⁄8" Single Receptacle (Terrazzo Floor)

Metal Carpet Flange

Use with single service covers for carpet applications.

S3082



Brass

Adapter Ring

Use with single service covers for tile applications.

S5016	SA5016
	
Brass	Aluminum

Furniture Feed Plate

PFBP1



Steel

One Piece Cover and Carpet Flange

Brass

SF3925*	SF2525*	SF2725*	SF2925*
			
Duplex Flap	2 1⁄8" x ¾" Combination	2 1⁄8" x 1" Combination	2 1⁄8" Single Receptacle

* Catalog number S5016 adapter ring is required for mounting SF series covers onto PFBA1A.

Flush Round Single Service Floor Boxes

Box Material	Cast Iron					Stamped Steel	
Collar Material							
Brass	**B2536**	**B253641**	**B2506**	**B2506415**	**B2537**	**B2527**	**B2529**
Aluminum	**BA2536**	**—**	**—**	**—**	**BA2537**	**BA2527**	**BA2529**
							
Min. Depth of Pour	3.75"	3.75"	4.75"	4.75"	3.00"	4.00"	3.00"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.25"	1.25"	–	–	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.38"	.38"	.63"	.63"	.38"	.38"	.38"
Cubic Inch Capacity	33.00	33.00	50.80	50.80	33.00	54.00	37.30
Dimensions - A	4.19"	4.19"	4.19"	4.19"	4.19"	4.19"	4.19"
Dimensions - B	3.09"	3.09"	4.75"	4.75"	2.81"	3.88"	2.91"
Threaded Hub Sizes	(4) ¾"	(4) 1"	(4) 1 ¼"	(4) 1 ½"	(4) ¾"	–	–
Knockouts - Opposite Sides	–	–	–	–	–	(1) 1" & (1) ¾"	(2) ½" & (1) ¾"
Knockouts - Opposite Ends	–	–	–	–	–	(1) 1 ¼" & (1) ¾"	(1) ½" & (1) ½"
Knockouts - Bottom	–	–	–	–	–	(3) ½" & (2) ¾"	(3) ½" & (2) ¾"

Flush Round Single Service Floor Boxes

Single Service Covers

Brass	**S3925**	**S3725**	**S2525**	**S2725**	**S2925**	**S3525**	**S3325**
Aluminum	**SA3925**	**SA3725**	**SA2525**	**SA2725**	**SA2925**	**SA3525**	**—**
							
Duplex Flap	Duplex Screw	2 ⅛" x ¾" Combination	2 ⅛" x 1" Combination	2 ⅛" Single Receptacle	2 ⅜" Single Receptacle	2 ⅛" Single Receptacle (Terrazzo Floor)	

Carpet Flanges

5 ¼" Diameter	**S3182**	**SA3182**	**S3079**
			
	Brass	Aluminum	Clear Polycarbonate

Carpet Flange

6 ¼" Diameter	**S3082**
	
	Brass

One Piece Cover and Carpet Flange

Brass	**SF3925**	**SF2525**	**SF2725**	**SF2925**
				
	Duplex Flap	2 ⅛" x ¾" Combination	2 ⅛" x 1" Combination	2 ⅛" Single Receptacle

Flush Rectangular Non-Metallic Floor Boxes with Non-Metallic Covers

Number of Gangs	1-Gang **PFBRG1**	2-Gang **PFBRG2**	3-Gang **PFBRG3**
				
Min. Depth of Pour	3.00"	3.00"	3.00"
Cubic in. Capacity per Gang	14.3 per 1" depth	14.3 per 1" depth	14.3 per 1" depth
Dimensions – A	3.60"	6.82"	10.04"
Dimensions – B	5.44"	8.66"	11.87"
Dimensions – C	5.42"	5.42"	5.42"
Dimensions – D	6.90"	6.90"	6.90"
Dimensions – E	6.00"	6.00"	6.00"
Dimensions – F	4.88"	8.13"	11.35"
Dimensions – G	6.00"	6.00"	6.00"
Hubs	(4) 1"	(6) 1"	(8) 1"
Reducers/Plugs	(4) 1" to ¾"	(6) 1" to ¾"	(8) 1" to ¾"

Flush Rectangular Non-Metallic Covers and Flanges

Required Components for Carpet Applications

Carpet Flanges – Gray

No. of Gangs	1-Gang **PFBRFGY1**	2-Gang **PFBRFGY2**	3-Gang **PFBRFGY3**
			

Cover with Duplex and Style Line® Inserts - Gray

One Required per Gang

PFBR826GYA



Duplex Insert | Cover | Style Line Insert

Required Components for Tile Applications

Mounting Collar

One Required per Gang

PFBRMC



Cover Frame

One Required per Gang

PFBRFRA



Cover with Duplex and Style Line® Inserts - Gray

One Required per Gang

PFBR826GYA



Duplex Insert | Cover | Style Line Insert

Flush Rectangular Non-Metallic Floor Boxes with Metal Covers

Number of Gangs	1-Gang **PFBRG1**	2-Gang **PFBRG2**	3-Gang **PFBRG3**
				
Min. Depth of Pour	3.00"	3.00"	3.00"
Cubic in. Capacity per Gang	14.3 per 1" depth	14.3 per 1" depth	14.3 per 1" depth
Dimensions – A	3.60"	6.82"	10.04"
Dimensions – B	5.44"	8.66"	11.87"
Dimensions – C	5.42"	5.42"	5.42"
Dimensions – D	6.90"	6.90"	6.90"
Dimensions – E	6.00"	6.00"	6.00"
Dimensions – F	4.88"	8.13"	11.35"
Dimensions – G	6.00"	6.00"	6.00"
Hubs	(4) 1"	(6) 1"	(8) 1"
Reducers/Plugs	(4) 1" to ¾"	(6) 1" to ¾"	(8) 1" to ¾"

Flush Rectangular Metal Covers and Flanges

Required Components for Carpet and Tile Applications

Adapter Frame and Grounding Lug – One Required per Gang

Brass	**S5017G**
Aluminum	**SA5017G**



Adapter Collar – Gray
One Required per Gang
PFBRAC



Covers – One Required per Gang

Brass	**S3825**	**S3625**	**S3826**	**S2425**	**S2625**	**S2825**	**S3813**
Aluminum	**SA3825**	**SA3625**	**SA3826**	**SA2425**	**SA2625**	**—**	**SA3813**
							
	Duplex Flap	Duplex Screw	Style Line Opening	2 ⅛" x ¾" Combination	2 ⅛" x 1" Combination	2 ⅛" Single Receptacle	Blank

Carpet Flanges (Not Required for Tile Applications)

Tapered Flange

No. of Gangs	1-Gang	2-Gang	3-Gang
Brass	**SB3083**	**SB3084**	**SB3085**
Aluminum	**SA3083**	**SA3084**	**SA3085**
			

Flush Rectangular Cast Iron Floor Boxes

Box Material			Cast Iron						
Collar Material									
Brass	B2436	B243641	B4233	B423341	B4333	B433361	B2414	B4214	B4314
Aluminum	BA2436	—	BA4233	—	BA4333	—	—	—	—
									
Min. Depth of Pour	3.75"	3.75"	3.75"	3.75"	3.75"	3.75"	2.00"	2.00"	2.00"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully	Semi	Semi	Semi
Before Pour External Height Adjustment	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.38"	.38"	.63"	.63"	.63"	.63"	–	–	–
Cubic Inch Capacity	33.00	33.00	36.50 Per Gang	36.50 Per Gang	34.80 Middle 36.50 Ends	34.80 Middle 36.50 Ends	16.00	16.00 Per Gang	16.00 Per Gang
Dimensions – A	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"
Dimensions - B	3.19"	3.19"	3.44"	3.44"	3.44"	3.44"	2.00"	2.00"	2.00"
Dimensions - C	3.19"	3.19"	6.38"	6.38"	9.56"	9.56"	3.19"	6.38"	9.56"
Threaded Hub Sizes	(4) ¾"	(4) 1"	(6) ¾"	(4) 1" & (2) ¾"	(8) ¾"	(6) 1" & (2) ¾"	(2) ¾"	(4) ¾"	(6) ¾"

Flush Rectangular Floor Box Covers and Flanges

Covers

Brass	S3825	S3625	S3826	S2425	S2625	S2825	S3425	S3813
Aluminum	SA3825	SA3625	SA3826	SA2425	SA2625	—	—	SA3813
								
	Duplex Flap	Duplex Screw	Style Line Opening	2 1⁄8" x ¾" Combination	2 1⁄8" x 1" Combination	2 1⁄8" Single Receptacle	2 3⁄8" Single Receptacle	Blank

Carpet Flanges

	1-Gang	2-Gang	3-Gang
Brass	SB3083	SB3084	SB3085
Aluminum	SA3083	SA3084	SA3085
Clear Polycarbonate	S3083	S3084	S3085
			

Flush Rectangular Stamped Steel Floor Boxes

Box Material	Stamped Steel					
Collar Material Brass Aluminum	**B2431** **BA2431**	**B2432** **BA2432**	**B2433** **BA2433**	**B2421** **BA2421**	**B2422** **BA2422**	**B2423** **BA2423**
						
Min. Depth of Pour	3.75"	3.75"	3.75"	2.75"	2.75"	2.75"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.25"	1.25"	1.25"	1.25"	1.25"	1.25"
After Pour Internal Height Adjustment	.50"	.50"	.50"	.50"	.50"	.50"
Cubic Inch Capacity	60.00	52.80 Per Gang	50.80 Per Gang	39.50	35.00 Per Gang	34.00 Per Gang
Dimensions – A	4.38"	4.38"	4.38"	4.38"	4.38"	4.38"
Dimensions - B	3.72"	3.72"	3.72"	2.74"	2.74"	2.74"
Dimensions - C	3.19"	6.44"	9.67"	3.19"	6.44"	9.67"
Knockouts - Opposite Sides	(1) Concentric ¾", 1", 1 ¼"	(2) Concentric ¾", 1", 1 ¼"	(3) Concentric ¾", 1", 1 ¼"	(2) ½", (1) ¾"	(4) Concentric ½", ¾"	(6) Concentric ½", ¾"
Knockouts - Opposite Ends	(1) Concentric ¾", 1", 1 ¼"	(1) Concentric ¾", 1", 1 ¼"	(1) Concentric ¾", 1", 1 ¼"	(1) ½", (1) ¾"	(2) Concentric ½", ¾"	(2) Concentric ½", ¾"
Knockouts - Bottom	(2) Concentric ¾", 1", 1 ¼"	(4) Concentric ¾", 1", 1 ¼"	(6) Concentric ¾", 1", 1 ¼"	(2) Concentric ¾", 1", 1 ¼"	(4) Concentric ¾", 1", 1 ¼"	(6) Concentric ¾", 1", 1 ¼"

Flush Rectangular Floor Box Covers and Flanges

Covers

Brass Aluminum	**S3825** **SA3825**	**S3625** **SA3625**	**S3826** **SA3826**	**S2425** **SA2425**	**S2625** **SA2625**	**S2825** **—**	**S3425** **—**	**S3813** **SA3813**
								
	Duplex Flap	Duplex Screw	Style Line Opening	2 ⅛" x ¾" Combination	2 ⅛" x 1" Combination	2 ⅛" Single Receptacle	2 ⅜" Single Receptacle	Blank

Carpet Flanges Brass Aluminum Clear Polycarbonate	1-Gang **SB3083** **SA3083** **S3083**	2-Gang **SB3084** **SA3084** **S3084**	3-Gang **SB3085** **SA3085** **S3085**
			

Recessed 4 and 8-Gang Floor Boxes

Box Material	Stamped Steel			Cast Iron
Style	4-Gang Deep **HBLCFB301BASE**	4-Gang Shallow **HBLCFB401BASE**	8-Gang Deep **HBLCFB501BASE**	4-Gang Shallow **HBLCFB401CB**
				
Min. Depth of Pour	4.25"	3.00"	5.25"	3.25"
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully
Before Pour External Height Adjustment	1.50"	1.50"	1.50"	1.50"
After Pour Internal Height Adjustment	.75"	.75"	.75"	.75"
Wiring Chambers	4 (1 per gang)	4 (1 per gang)	4 (1 per 2 gangs)	4 (1 per gang)
Cubic Inch Capacity	29.50 per chamber	25.50 per chamber	49.50 per chamber	25.50 per chamber
L x W x H	10.0" x 10.0" x 4.0"	10.0" x 10.0" x 2.63"	10.0" x 10.0" x 5.13"	10.0" x 10.0" x 3.13"
Threaded Hubs / chamber	–	–	–	(2) 1"
Knockouts per chamber	(1) Concentric ½", ¾" (1) Concentric ¾", 1" (1) 1 ¼"	(3) Concentric ½", ¾"	(1) Concentric ½", ¾" (1) Concentric ¾", 1" (1) 1 ¼"	–

Recessed Floor Box Covers

Steel Cover and Flange Assembly

HBLTCGNTSW



Granite

HBLTCGNTBKSW



Black

Face Plates

HBLST302SGY



Duplex

HBLDE301SGY



Style Line

HBLTO310SGY



Toggle

HBLTL318GY



Single Receptacle (1.39" Boss Dia.)

HBLTL319SGY



Single Receptacle (1.56 Boss Dia.)

HBLBL300SGY



Blank

HBLIMFSGY



Hubbell INFINeSTATION ™

HBL317SGY



Hubbell 6-Port

HBLAM303SGY



AMP-ACO

HBLAMP313SGY



AMP 6-Port

HBLKR314SGY



Krone®/Leviton®

HBLLT309SGY



SYSTIMAX®

HBLPA308SGY



Panduit Mini-Com ®

HBLNO309SGY



NORDX® 6-Port

HBLSI305SGY



Siemon CT ® Series

HBLSI315SGY



Siemon MAX® Series

HBLOR306SGY



Ortronics Series II®

HBLORT322SGY



Ortronics TracJack®

Recessed 6-Gang Floor Boxes

Stamped Steel

LCFBSSA



Min. Depth of Pour	3.50"
Adjustability (Fully, Semi, Non)	Fully
Before Pour External Height Adjustment	1.25"
Wiring Chambers	6
Cubic Inch Capacity per Chamber	(4) at 38.20 (2) at 25.40
L x W x H	12.5" x 12.5" x 6.18"
Knockouts per Chamber	(1) Concentric 1", 1 ¼" (1) ¾"

Cast Iron

LCFBCA



Min. Depth of Pour	3.65"
Adjustability (Fully, Semi, Non)	Fully
Before Pour External Height Adjustment	1.25"
Wiring Chambers	6
Cubic Inch Capacity per Chamber	(4) at 36.80 (2) at 25.40
L x W x H	13.0" x 13.0" x 6.35"
Threaded Hub Sizes per Chamber	(1) ¾" (1) 1 ¼"

Recessed Floor Box Covers – Carpet Applications

Metallic Cover, Flange and Cable Doors

LCFBCBRSC



Brass Finish

LCFBCALC



Aluminum Finish

LCFBCGYC



Gray

LCFBCBKC



Black

Reinforced Non-Metallic Cover, Flange and Cable Doors

LCFBCBRA



Brown

LCFBCGYA



Gray

LCFBCIA



Ivory

LCFBCBKA



Black

Recessed Floor Box Covers – Tile Applications

Metallic Cover and Cable Doors

LCFBCBRST



Brass Finish

LCFBCALT



Aluminum Finish

LCFBCGYT



Gray

LCFBCBKT



Black

Face Plates

LCFBP8



Duplex Opening

LCGBP26



Style Line Opening

LCFBP720



Single Receptacle Opening (for 1.56" boss dia.)

LCFBP14



Blank

LCFBIM



3 Unit INFINeSTATION™ Opening (see back page for module options)

Recessed 2-Gang Floor Boxes

Stamped Steel

3SFBSS



Min. Depth of Pour	3.00"
Adjustability (Fully, Semi, Non)	Fully
Before Pour External Height Adjustment	1.25"
After Pour Internal Height Adjustment	.44"
Wiring Chambers	2
Cubic Inch Capacity per Chamber	22.40
L x W x H	12.25" x 5.50" x 2.88"
Knockouts	
Opposite Ends	(1) 1"
Opposite Sides	(2) ¾"
Center Area	Concentric 1", 1 ¼" (each side)

Cast Iron

3SFBC



Min. Depth of Pour	3.00"
Adjustability (Fully, Semi, Non)	Fully
Before Pour External Height Adjustment	1.25"
After Pour Internal Height Adjustment	.44"
Wiring Chambers	2
Cubic Inch Capacity per Chamber	21.60
L x W x H	12.88" x 6.00" x 3.00"
Threaded Hub Sizes	
Opposite Ends	(1) 1 ¼"
Opposite Sides	(2) ¾"
Center Area	(1) 1 ¼" (each side)

Recessed Floor Box Covers – Carpet Applications

Reinforced Non-Metallic Cover, Flange and Cable Doors

3SFBCBRA



Brown

3SFBCIA



Ivory

3SFBCGYA

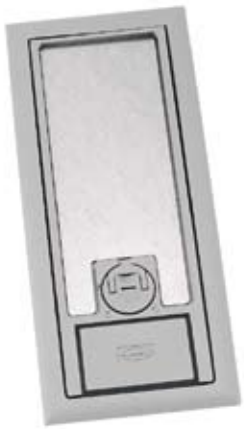

Gray

3SFBCBKA



Black

Face Plates

3SFBRP



Duplex Knockout

3SFBDS



Style Line Opening

3SFBS



Single Receptacle Opening (for 1.39" boss dia.)

3SFBB



Blank

3SFBTP



Voice / Data 2 - Jack Knockouts (.6" x .75")

3SFBIM



3 unit INFINeSTATION™ Opening (see back page for module options)

Flush Floor Boxes for Wooden Floors

Box Material	Rectangular Stamped Steel			Round Cast Iron	
Collar Material Brass Aluminum	**B2481**	**B2482**	**B2483**	**B2588**	**B2588275**
					
Gangs	Single	Two	Three	Single	Single
Adjustability (Fully, Semi, Non)	Semi	Semi	Semi	Non	Non
External Height Adjustment	1.00"	1.00"	1.00"	-	-
Cubic Inch Capacity	42.00	42.50 Per Gang	42.50 Per Gang	18.50	18.50
Dimensions - A	4.50"	4.50"	4.50"	4.19"	4.19"
Dimensions - B	3.13"	3.13"	3.13"	3.75"	3.75"
Dimensions - C	3.20"	6.42"	9.64"	-	-
Hubs/Knockouts - Opposite Sides	(1) Concentric ½", ¾", 1"	(2) Concentric ½", ¾", 1"	(3) Concentric ½", ¾", 1"	-	(2) ¾"
Hubs/Knockouts - Bottom	(1) Concentric ½" - 1 ¼"	(2) Concentric ½" - 1 ¼"	(3) Concentric ½" - 1 ¼"	(2) ½"	(2) ½"

Flush Floor Box Covers and Flanges

Rectangular Covers

Brass Aluminum	**S3825** **SA3825**	**S3625** **SA3625**	**S3826** **SA3826**	**S2425** **SA2425**	**S2625** **SA2625**	**S2825** **—**	**S3425** **—**	**S3813** **SA3813**
								
	Duplex Flap	Duplex Screw	Style Line Opening	2 1⁄8" x ¾" Combination	2 1⁄8" x 1" Combination	2 1⁄8" Single Receptacle	2 3⁄8" Single Receptacle	Blank

Round Covers

Brass Aluminum	**S3925** **SA3925**	**S3725** **SA3725**	**S2525** **SA2525**	**S2725** **SA2725**	**S2925** **SA2925**	**S3525** **SA3525**	**S3325** **—**
							
	Duplex Flap	Duplex Screw	2 1⁄8" x ¾" Comb.	2 1⁄8" x 1" Comb.	2 1⁄8" Single Receptacle	2 3⁄8" Sin. Receptacle	2 1⁄8" Sin. Rec. (Terrazzo Floor)

Round Flanges

S3082 (6 ¼" Dia.)
SA3182 (5 ¼" Dia.)



Rectangular Flanges

Brass Aluminum	**SB3083W** **SA3083W**	**SB3084W** **SA3084W**	**SB3085W** **SA3085W**
			
	1-Gang	2-Gang	3-Gang

One Piece Brass Cover and Carpet Flange

SF3925	**SF2525**	**SF2725**	**SF2925**
			
Duplex Flap	2 1⁄8" x ¾" Combination	2 1⁄8" x 1" Combination	2 1⁄8" Single Receptacle

Power, Data, Audio and Video Accessories

Modular Jacks

HBL6OW*
Category 6
Universal
Wired
Office White



HBL5EOW*
Category 5e
Universal
Wired
Office White



HBLUOW*
USOC
6-Position
Office White



SIBOWPK10**
Blank
Module
Office White



* Office White is standard color. For other colors, replace 'OW' as follows:
BK = Black B = Blue
EI = Electric Ivory GY = Gray
GN = Green OR = Orange
R = Red TI = Telco Ivory
W = White Y = Yellow.

** Office White is standard color. For other colors, replace 'OW' as follows:
GY = Gray I = Ivory
W = White.

***Housing color is Black. Replace 'xx' with one of the following to designate insulator:
OW = Red W = White
Y = Yellow

+ Housing color is Black. Replace 'xx' with one of the following to designate insulator:
R = Red W = White
Y = Yellow BK = Black

++ Office White is standard color. For other colors, replace 'OW' as follows:
GY = Gray I = Ivory
W = White BK = Black

+++ Standard color is Brown. For other colors, add one of the following to the end of the catalog number:
I = Ivory GY = Gray
WA = White BK = Black
OW = Office White

Multimedia Connectors

SIFOW**
F-Type
F/F Coupler
Office White



SIFGOW**
Gold F-Type
F/F Coupler
Office White



SIRCAxx***
RCA 110
Punch Down
Black



SIRCAFFxx +
Gold RCA
F/F Coupler
Pass-Thru
Office White



SIRCASxx +
RCA Solder
Coupler
Office White



SISVFFBK
S-Video
F/F Coupler
Black



SISVOW
S-Video
110 Coupler
Black



SIBNCOW**
BNC
Coupler
Office White



SIFSCOW
SC Simplex
Adapter
Office White



SISTOW**
ST-Style
Adapter
Office White



INFINeSTATION® Modules (Office White)

DFBM05OW
Blank
.5 Unit



DFBM1OW
Blank
1 Unit



DFBM15OW
Blank
1.5 Unit



DF1KOW
1-Port
Keystone
Flat 1 Unit



DF2KOW
2-Port
Keystone
Flat 1 Unit



DFA1KOW
1-Port
Keystone
Angled
1 Unit



DFA2KOW
2-Port
Keystone
Angled
1 Unit



DFA1SCOW
1 SC Duplex
Angled
1.5 Unit



DFA2SCOW
2 SC Duplex
Angled
1.5 Unit



DFRA1KOW
1-Port
Keystone
Recessed
1.5 Unit



DFRA2KOW
2-Port
Keystone
Recessed
1.5 Unit



DF115FFOW
15-Pin SVGA
F/F, 1 Unit



DF19FFOW
9-Pin F/F
1 Unit



DF115SOW
15-Pin SVGA
Screw Terminal
1 Unit



Outlet Frames

FCX244OW++
2-Port
Style Line®
Frame
Office White



FCX344OW++
3-Port
Style Line
Frame
Office White



FCX444OW++
4-Port
Style Line
Frame
Office White

FCX644OW++
6-Port
Style Line
Frame
Office White

DJOOW++
2-Port
106 Duplex
Frame
Office White



DJ106OW++
4-Port
106 Duplex
Frame
Office White



Wiring Devices

HBL2152 +++
15A 125V
Style Line
Duplex
Receptacle
Brown



HBL2162 +++
20A 125V
Style Line
Duplex
Receptacle
Brown



HBL2310
20A 125V
Twist-Lock
Receptacle
(1.56" boss
diameter)
Black



HBL2320
20A 250V
Twist-Lock
Receptacle
(1.56" boss
diameter)
Black



HBL2610
30A 125V
Twist-Lock
Receptacle
(1.56" boss
diameter)
Black



HBL2620
30A 250V
Twist-Lock
Receptacle
(1.56" boss
diameter)
Black



Extron is a registered trademark of Extron Electronics.
Krone is a registered trademark of Krone, Inc.
MAX and CT Series are registered trademarks of The Siemon Company.
Mini-Com and Panduit are registered trademarks of Panduit Corp.
NORDX is a registered trademark of Belden/CDT, Inc.
SYSTIMAX is a registered trademark of CommScope, Inc.
TracJack, Series II and Ortronics are registered trademarks of Ortronics/Legrand.

Printed In U.S.A. Specifications subject to change without notice.
® Registered trademark of Hubbell Incorporated.

Hubbell Wiring Device-Kellems
Hubbell Incorporated (Deleware)• 185 Plains Road • Milford, CT 06461-2420 • (203) 882-4800 • FAX (800) 255-1031

HUBBELL® Wiring Systems