



KTEB-126-1-TP

COMPACT FLUORESCENT BALLAST



DESCRIPTION

1 x 26W CFL | 120V | Normal Power Factor | Rapid Start | Small Plastic Case

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC $\pm 10\%$
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD
CFQ26W/G24q	1	120	24	0.40	0.54	<1.70	0.90	3.75	150
CFS28W/GR10q	1	120	26	0.40	0.58	<1.70	0.90	3.46	130
F32T8	1	120	32	0.45	0.59	<1.70	0.95	2.97	130
F25T8	1	120	25	0.37	0.57	<1.70	0.95	3.80	130
F19T5 (28" or 30")	1	120	18	0.29	0.52	<1.70	1.00	5.56	150
F18T5 (24" or 26")	1	120	17	0.27	0.52	<1.70	1.00	5.88	160
F17T8	1	120	18	0.27	0.54	<1.70	1.00	5.55	150
F15T8	1	120	16	0.26	0.52	<1.70	1.00	6.25	150
F13T8	1	120	16	0.26	0.51	<1.70	1.10	6.88	160
FC9T5	1	120	23	0.35	0.55	<1.70	1.05	4.57	140

WIRING DIAGRAMS

C1-2

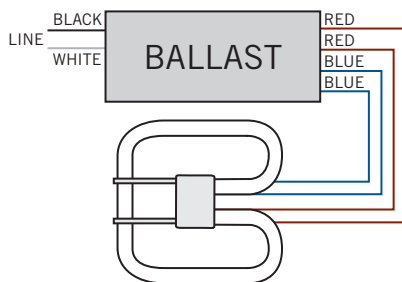




KTEB-126-1-TP

COMPACT FLUORESCENT BALLAST


HOT SPOT LOCATION

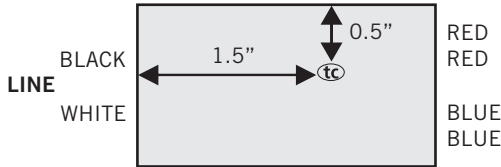

Actual tc point is noted on each ballast label.

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	3.45"
WIDTH	1.81"
HEIGHT	1.21"
MOUNTING	3.15"
CASE STYLE	S1

STANDARD LEAD LENGTHS*

BLACK	12"
WHITE	12"
BLUE	6"
RED	6"

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-126-1-TP-CP	Carton Pack	50	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-126-1-TP-CP

1 2 3 4 5 6

- 1 Keystone Technologies Electronic Ballast
- 2 1 Lamp
- 3 26 Watts
- 4 120V Input
- 5 Thermally Protected
- 6 Packaging Style