

KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

DESCRIPTION

10" LED Recessed Downlight |
Power Select Technology | Color Select Technology |
Remote Driver with Built-in Junction Box

APPLICATION

Ideal for residential, hospitality, retail, office, and
other retrofit and new construction applications



**10 YEAR
LIMITED WARRANTY**



PRODUCT FEATURES

- Keystone Power Select and Color Select technologies offer SKU reduction and allow for easy, on-the-job adjustments
 - Utilizes a remote driver with built-in junction box and quick disconnect; Eliminates the need for a traditional, multi-piece fixture setup
 - CEC Compliant Flicker Rate (CEC JA10 std.)
 - Ideal for new construction, remodel, and retrofit applications
 - Frosted lens provides even illumination
 - Interchangeable trims available in matte black, brushed nickel, and bronze
 - Powered by Keystone 0–10V dimming LED driver; 10–100% dimming
 - Ambient operating temperature: –30°C/–22°F to 40°C/104°F
 - Suitable for use in wet locations
 - Airtight and Type IC-rated
 - Power factor: >0.90
 - THD: <20%
 - LED chip lifetime: L70 >80,000 hrs @ 25°C/77°F ambient fixture temp
 - FCC Part 15, Subpart B, Class A
- ** TAA compliant. Please contact your sales representative to ensure proper specification and fulfillment for projects with TAA requirements.**

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage (Selectable)	CCT (Selectable)*	Lumen Output	Efficacy	CRI	Power Factor	Beam Angle	Lifetime
KT-RDLED38PS-10B-9CSF-VDIM	120–277V	37.5W	2700K	3,450	92 lm/W	>90	>0.9	90°	50,000 hrs
			3000K	3,500	93 lm/W				
			3500K	3,550	95 lm/W				
			4000K	3,550	95 lm/W				
			5000K	3,500	93 lm/W				
		29.5W	2700K	2,800	95 lm/W				
			3000K	2,840	96 lm/W				
			3500K	2,880	98 lm/W				
			4000K	2,880	98 lm/W				
			5000K	2,840	96 lm/W				
		21W	2700K	2,000	95 lm/W				
			3000K	2,030	97 lm/W				
			3500K	2,060	98 lm/W				
			4000K	2,060	98 lm/W				
			5000K	2,030	97 lm/W				

* Preset to highest CCT: 5000K


Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT


PHOTOMETRIC SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

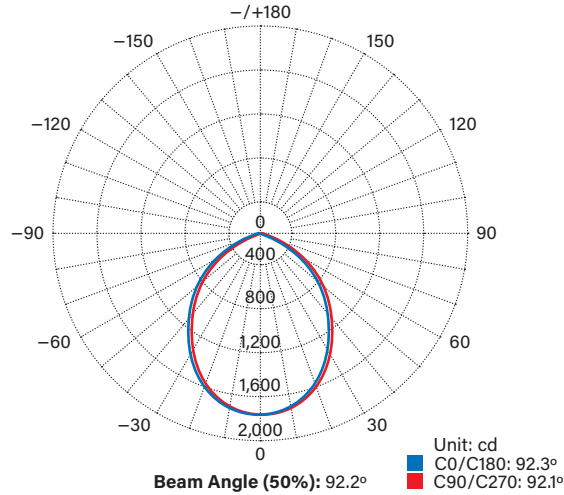


LUX DISTANCE CURVE

Flux Out: 2,568 lm

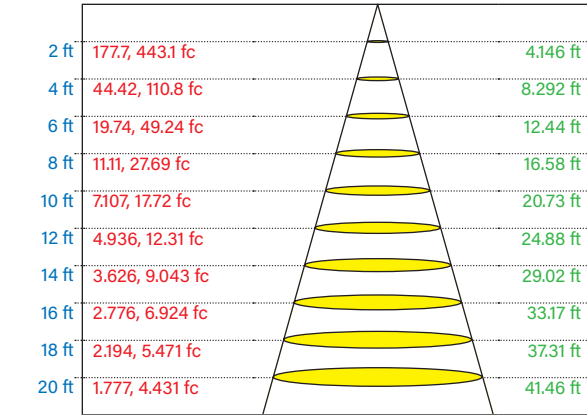

Curves show illuminated area and average illumination when lamp is at various distances.

PHYSICAL SPECIFICATIONS

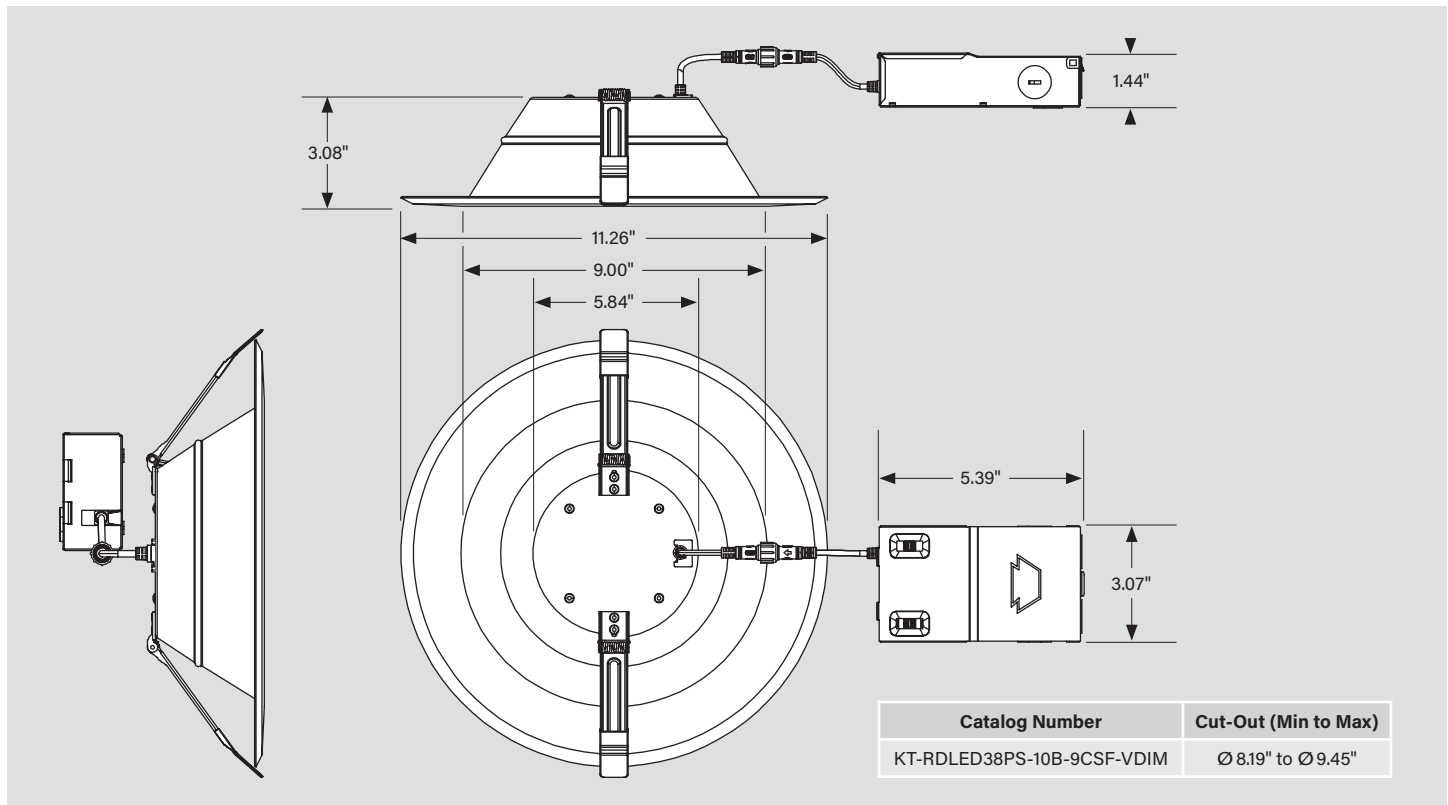


KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

POWER SELECT (WATTAGE) AND COLOR SELECT (CCT) ADJUSTMENT

This fixture is equipped with field-adjustable Keystone Power Select and Color Select technology.

1. Ensure power is off to the fixture.
2. Adjust dip switches to desired settings.

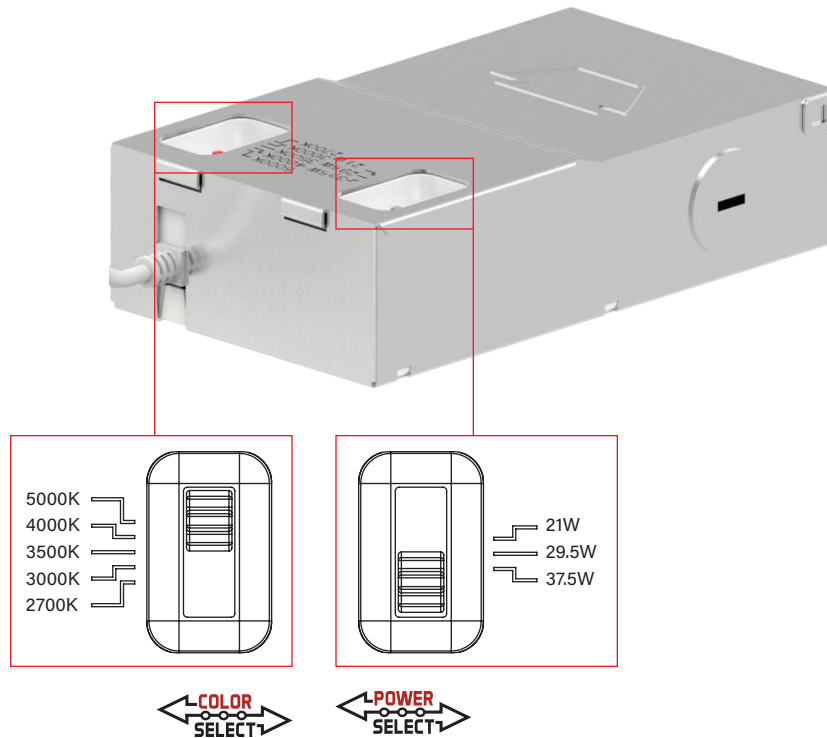


COLOR SELECT ADJUSTMENT SWITCH

Set dip switch to adjust CCT between 2700K, 3000K, 3500K, 4000K, and 5000K. Fixture comes preset at 5000K.

POWER SELECT ADJUSTMENT SWITCH

Set dip switch to adjust wattage between 21W, 29.5W, and 37.5W. Fixture comes preset at 37.5W.

WIRING DIAGRAM

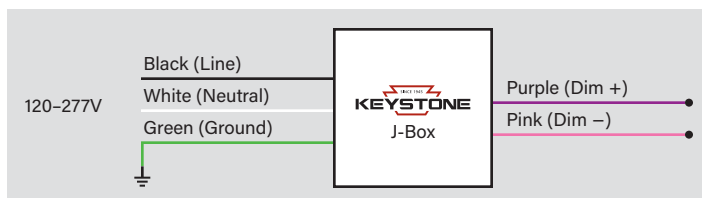

KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

INSTALLATION INSTRUCTIONS

RETROFIT INSTALLATION

- 1. Shut off power at the source of the fixture housing into which you are installing fixture.**


Remove existing trim, CFL or incandescent bulb.

Note: Follow all federal and local regulations when disposing of lamps and removed components.


- 2. Measure ceiling opening to ensure that the edge of the luminaire will cover the entire opening and still sit firmly in the ceiling (see Dimensions on page 2).**

- 3. Select desired Wattage and CCT using adjustment switches on fixture (see Power Select (Wattage) and Color Select (CCT) Adjustment on page 3).**


- 4. Open the driver box and remove the knockout(s) (KO).**

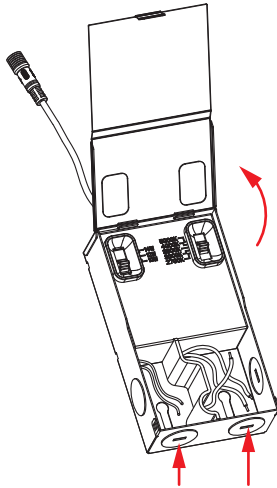


- 5. Insert the electrical supply cable through the KO; use appropriate bushing to prevent wire abrasion. Wire driver box (see Wiring Diagram on page 3 and illustration below).***

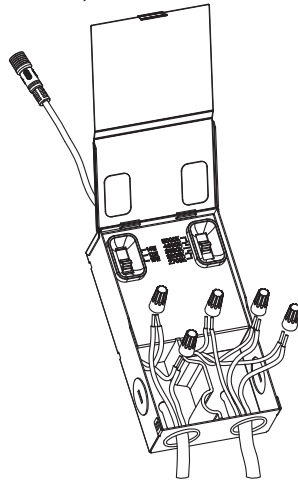


- 6. Place all wiring and connections back into the box and close the cover.**

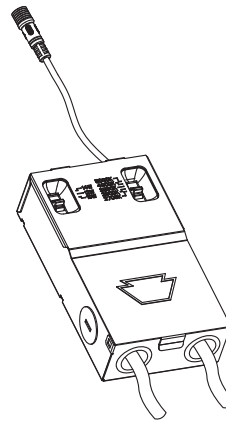


- 7. Insert driver box into ceiling in accordance with local/national codes and connect the male and female connectors. Screw threaded nut over connectors to secure.**

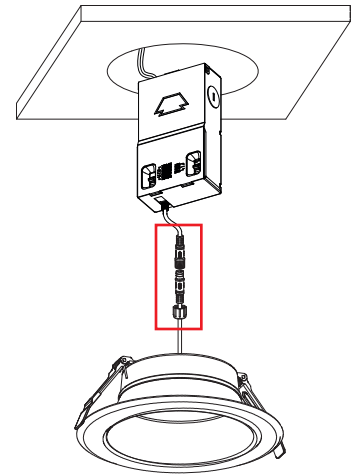

- 8. Lifting both retention tabs upward, push the fixture into the hole until trim sits flush with ceiling.**



- 9. Restore power when ready.**



* Keystone offers an optional cable accessory to assist with wiring to existing fixture J-box. See KT-MC-NP-1-18/3, Optional Accessories (sold separately) on page 6.

(Installation Instructions continued on next page)

KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

INSTALLATION INSTRUCTIONS (continued)


NEW-CONSTRUCTION INSTALLATION*

1. Shut off power at the source of the fixture housing into which you are installing fixture.


2. Using installation hole template, create ceiling opening to ensure that the edge of the luminaire will cover the entire opening and still sit firmly in the ceiling (see Dimensions on page 2).

3. Select desired Wattage and CCT using adjustment switches on fixture (see Power Select (Wattage) and Color Select (CCT) Adjustment on page 3).


4. Open the driver box and remove the knockout(s) (KO).

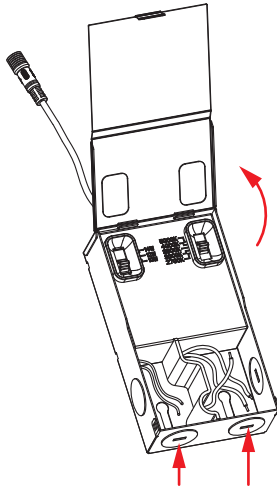


5. Insert the electrical supply cable through the KO; use appropriate bushing to prevent wire abrasion. Wire driver box (see Wiring Diagram on page 3 and illustration below).*

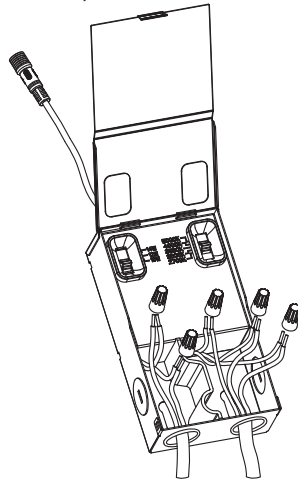


6. Place all wiring and connections back into the box and close the cover.

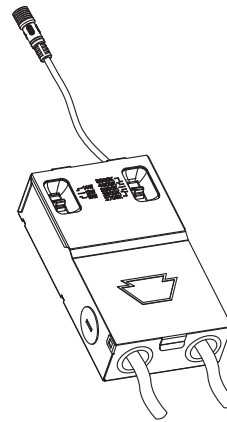


7. Insert driver box into ceiling in accordance with local/national codes and connect the male and female connectors. Screw threaded nut over connectors to secure.

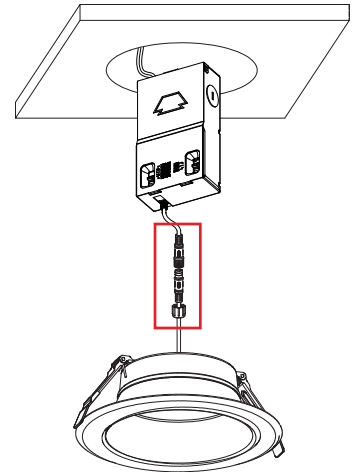

8. Lifting both retention tabs upward, push the fixture into the hole until trim sits flush with ceiling.



9. Restore power when ready.



* Keystone offers an optional cable accessory to assist with wiring to existing fixture J-box. See KT-MC-NP-1-18/3, Optional Accessories (sold separately) on page 6.

KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

OPTIONAL ACCESSORIES (sold separately)


INTERCHANGEABLE TRIM

Catalog Number	Description	UPC	Easy Code
KT-RDLED-10B-MB-TRIM	10" Interchangeable Trim for 10B Recessed Downlight; Matte Black	843654139548	QKM-72
KT-RDLED-10B-BN-TRIM	10" Interchangeable Trim for 10B Recessed Downlight; Brushed Nickel	843654139586	EHN-83
KT-RDLED-10B-BR-TRIM	10" Interchangeable Trim for 10B Recessed Downlight; Bronze	843654139623	VQO-30




GOOF RING

Catalog Number	Description	UPC	Easy Code
KT-RDLED-10B-GOOF	10" Goof Ring for 10B Recessed Downlights; 12" outer diameter	843654139715	UGY-14

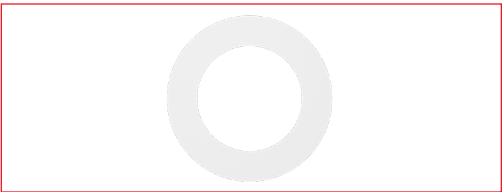


NEW-CONSTRUCTION PLATE

Catalog Number	Description	UPC	Easy Code
KT-RDLED-PLATE-1	New-construction plate for LED Recessed Downlights	843654137285	BMS-81

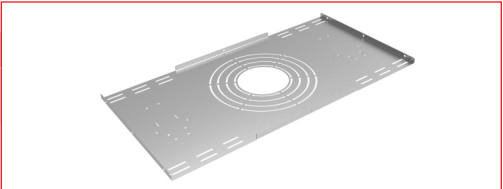


EXTENSION CABLES

Catalog Number	Description	UPC	Easy Code
KT-WDLED-EC-6	6' Extension Cord for LED Recessed Downlights	843654139739	GOK-14
KT-WDLED-EC-12	12' Extension Cord for LED Recessed Downlights	843654139746	ECE-88
KT-WDLED-EC-20	20' Extension Cord for LED Recessed Downlights	843654139753	JLM-06

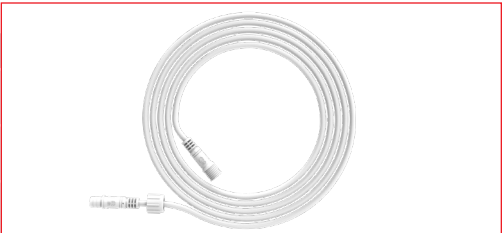

METAL-CLAD CABLE

Catalog Number	Description	UPC	Easy Code
KT-MC-NP-1-18/3	Metal-Clad Cable for LED Recessed Downlights; No plug; UL 16AWG 18/3 wire (live, neutral, ground)	843654139777	AYT-71

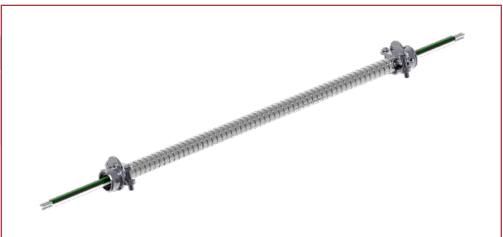


EMERGENCY PACK

Catalog Number	Description	UPC	Easy Code
KT-EMRG-LED-12-1200-AC / DF	LED Emergency Backup, 12W - 1200 Lumen Constant Power Design. 120-277V Input. Dual Flex Cable Design. Installs on Primary Side of AC Powered LED load.	843654139890	MPM-43





ADVANTARMT



KT-RDLED38PS-10B-9CSF-VDIM

10" LED RECESSED DOWNLIGHT

ORDERING INFORMATION

Catalog Number	Pack Qty.	UPC	Easy Code
KT-RDLED38PS-10B-9CSF-VDIM	1	843654139296	HIM-98
KT-RDLED38PS-10B-9CSF-VDIM /TAA	1	TBD	TBD

CATALOG NUMBER BREAKDOWN

KT-RDLED38PS-10B-9CSF-VDIM

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

1 Keystone Technologies	2 Fixture Type	6 Size	7 Style/Design Designation
2 Fixture Type	RD Recessed Downlight	10 10" Nominal	B Series B
3 LED Technology	8 CRI	10 Color Select Designation	
4 Maximum Wattage	9 90	F 2700K, 3000K, 3500K, 4000K, 5000K	
5 Power Select Technology	11 Dimming	12 TAA Compliant	
6 Size	VDIM 0-10V Dimming	/TAA Made in Cambodia	
7 Style/Design Designation			
8 CRI			
9 Color Select Technology			
10 Color Select Designation			
11 Dimming			
12 TAA Compliant			