

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

DESCRIPTION

LED Exit Combo | Single Facing | Adjustable Dual Heads |
Chicago Compliant | High Lumen Output Option Available |
White Finish | 6500K White Light | Surface Mount |
Battery Backup | Built-in Test Switch | 120-277V Input

APPLICATION

UL 924 Compliant Exit Combo with Built-in Red Lettering,
Chicago Code Compliant. Provides 90+ Minutes of
Emergency Power.



Top and Side Light
Options Included

PRODUCT FEATURES

- Red LED Lettering Color
- Includes Single Facing Configuration
- Surface Mount - Back, Side, or Top
- Integrated Backup Battery - NiMH
- 90 Minutes of Emergency Power
- Integrated Test Switch & Charge Indicator
- Switchable Top and Side Light Options
- Chicago Code Compliant Design
- 20-Gauge Steel Housing and Facings
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations
- Universal J-Box Mounting Pattern
- High Lumen Output Option Available


PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Letter Color	Housing Color	Mounting	Battery Type	Battery Capacity	Recharge Time	Remote Capable
KT-EC-STCH1-WH1RW-SU	120-277V	4.8W	6500K	400	Red	White	Surface: Top, Side, and Back Mount	Nickel-Metal Hydride	1200mAh	24 Hours	No
KT-EC-STCH1-WH1RW-SU-HO				800					2000mAh		

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

DUAL HEADS ON TOP

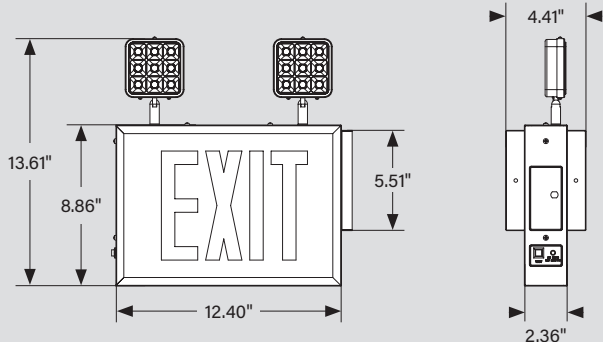

Weight


Fixture Weight	Carton Weight
6.2 lbs	31.8 lbs

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

PHYSICAL SPECIFICATIONS (CONTINUED)

DUAL HEADS ON SIDE

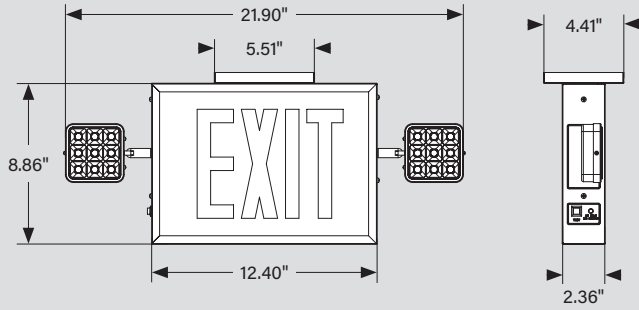

Weight

Fixture Weight	Carton Weight
6.4 lbs	32.2 lbs

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

MOUNTING OPTIONS


BACK MOUNT



TOP MOUNT



SIDE MOUNT

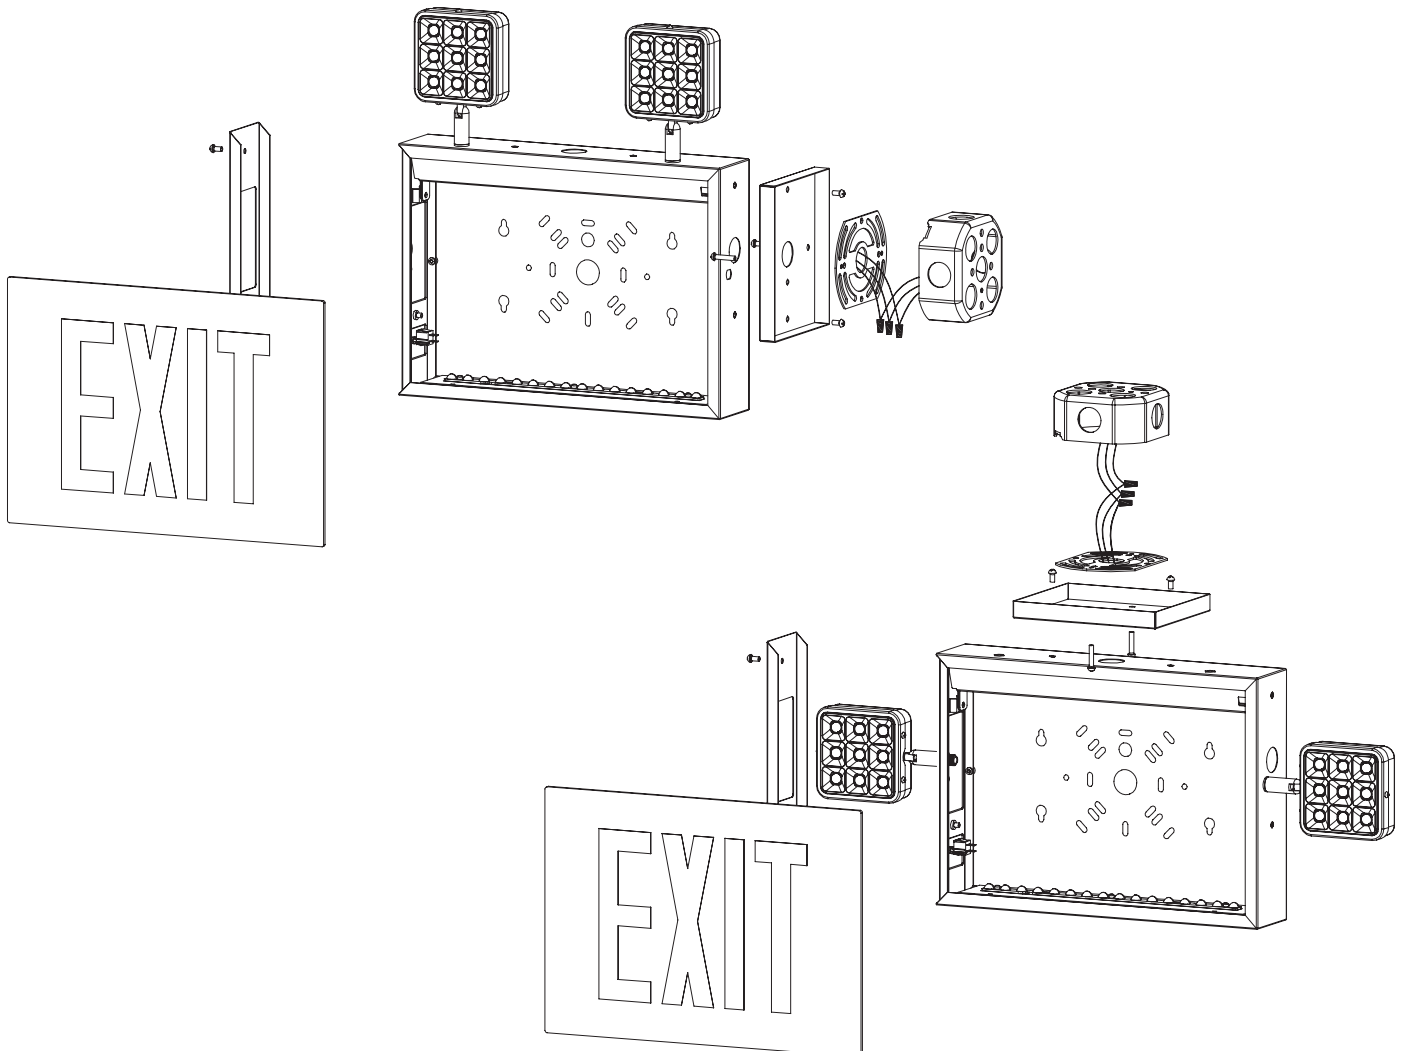

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

OPTIONAL FACEPLATE KITS (OPTIONAL FACEPLATES SHIP WITH PRIMARY UNIT)


Kit Code	Catalog Number	Included Faceplate(s)	Image
/EE	KT-EC-STCH1-WH1RW-SU /EE	Exit x2	
/EL	KT-EC-STCH1-WH1RW-SU /EL	Exit with Left Arrow	
/ER	KT-EC-STCH1-WH1RW-SU /ER	Exit with Right Arrow	
/ELR	KT-EC-STCH1-WH1RW-SU /ELR	Exit with Left Arrow Exit with Right Arrow	
/ED	KT-EC-STCH1-WH1RW-SU /ED	Exit with Double Arrow	
/EDD	KT-EC-STCH1-WH1RW-SU /EDD	Exit with Double Arrow x2	
/S	KT-EC-STCH1-WH1RW-SU /S	Stair	
/SS	KT-EC-STCH1-WH1RW-SU /SS	Stair x2	
/SL	KT-EC-STCH1-WH1RW-SU /SL	Stair with Left Arrow	
/SR	KT-EC-STCH1-WH1RW-SU /SR	Stair with Right Arrow	
/SLR	KT-EC-STCH1-WH1RW-SU /SLR	Stair with Left Arrow Stair with Right Arrow	
/SD	KT-EC-STCH1-WH1RW-SU /SD	Stair with Double Arrow	
/SDD	KT-EC-STCH1-WH1RW-SU /SDD	Stair with Double Arrow x2	

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

SPACING GUIDELINES


KT-EC-STCH1-WH1RW-SU

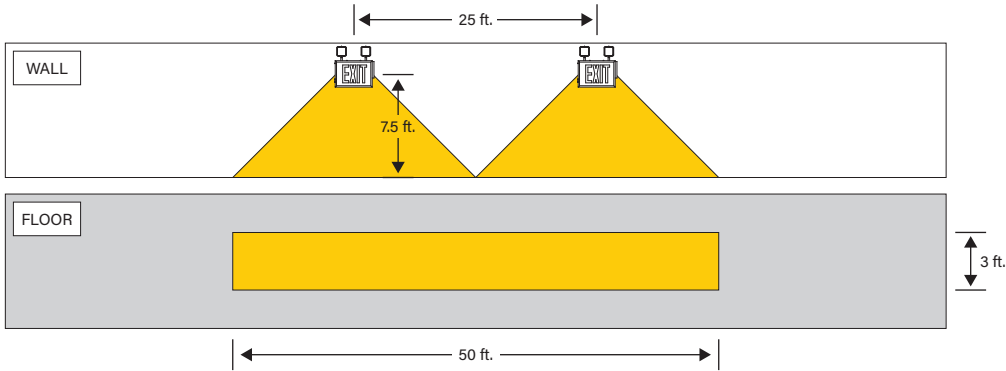

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 55° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.

KT-EC-STCH1-WH1RW-SU-HO

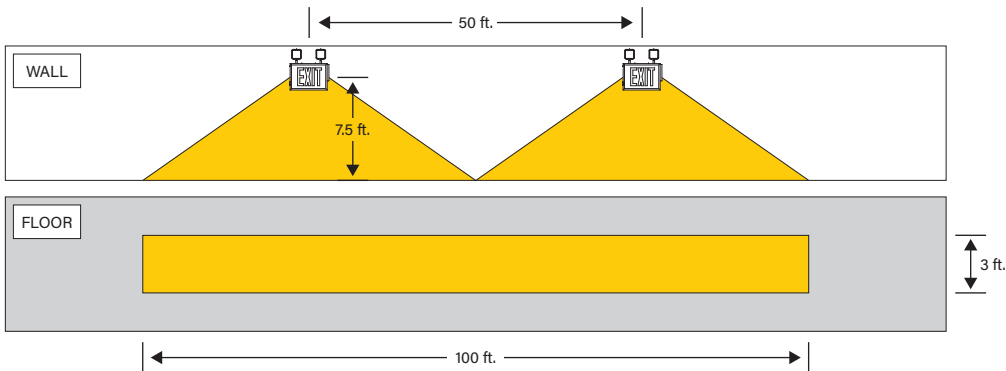

Multiple Unit Spacing	
Room Description	8' x 12' Hallway
Head Orientation	45° Rotation, 65° Tilt
Path of Egress	3' Wide
Illumination	1fc average, 0.1fc minimum

*Spacing guidelines provided are for general reference only. Actual performance will vary based on each installations unique dimensions, wall colors, floor type, and other factors. Please contact lightinglayouts@keystonetech.com for detailed layout assistance needs.


SMART//SAFE®

KT-EC-STCH1-WH1RW-SU-XX

EXIT COMBO

ORDERING INFORMATION

Catalog Number	Lumen Output	UPC	Easy Code
KT-EC-STCH1-WH1RW-SU	400	843654165318	RUV-22
KT-EC-STCH1-WH1RW-SU-HO	800	843654165325	AKA-13

CATALOG NUMBER BREAKDOWN

KT-EC-STCH1-WH1RW-SU-XX /YY

1	2	3	4	5	6	7	8	9	10	11	12
1 Keystone Technologies	2 Exit Combo	3 Steel - Chicago Compliant	4 Form Factor 1	5 Housing Color	6 Facings	7 Lettering Color	8 Light Color	9 Mounting	10 Input Voltage	11 Lumen Output	
				WH White	1 Single	R Red Lettering	W White	S Surface Mount	U 120-277V	HO High Lumen Output	
12 Kit Code											

ORDERING EXAMPLES

FIXTURE WITH OPTIONAL FACEPLATES INCLUDED (KIT)

KT-EC-STCH1-WH1RW-SU /EE

FIXTURE WITH NO ADDITIONAL FACEPLATES

KT-EC-STCH1-WH1RW-SU

KEYSTONE FIXTURE

CATALOG NUMBER

KT-EC-STCH1-WH1RW-SU

KIT CODE

✓	SUFFIX	CATALOG NUMBER
✓	/EE	KT-EC-STCH1-WH1RW-SU /EE

Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code. Contact Keystone to order individual faceplates separately.